

May 2024

# 2024

# Air Monitoring Network Plan

Maricopa County  
Air Quality Department  
Air Monitoring Division



## Table of Contents

<b>2024 AIR MONITORING NETWORK PLAN</b>	1
<b>LIST OF TABLES</b> .....	3
<b>LIST OF FIGURES</b> .....	4
<b>ABSTRACT</b>	5
<b>NETWORK MODIFICATIONS AND SITE UPDATES</b> .....	6
<b>Summary of Past Network Modifications and Site Updates</b> .....	6
<b>Proposed Network Modifications and Site Updates</b> .....	6
<b>INTRODUCTION</b>	8
<b>CLEAN AIR ACT AND CRITERIA POLLUTANTS</b> .....	11
<b>THE NATIONAL AMBIENT AIR QUALITY STANDARDS</b> .....	11
<b>FORECASTING AND REPORTING AIR QUALITY CONDITIONS</b> .....	13
<b>Air Quality Forecasting</b> .....	13
<b>The EPA Air Quality Index and NowCast</b> .....	13
<b>The Maricopa County Interactive Air Quality Map</b> .....	15
<b>AIR MONITORING STRATEGIES AND SURVEILLANCE SYSTEM DESIGN</b>	17
<b>OVERVIEW OF AIR MONITORING REQUIREMENTS AND SYSTEM DESIGN</b> .....	17
<b>Basic Air Monitoring Objectives</b> .....	18
<b>Monitor Types</b> .....	18
<b>Site Types</b> .....	19
<b>Monitoring Scales (Spatial Scales of Representativeness)</b> .....	20
<b>Overview of the Air Monitoring Sites</b> .....	21
<b>SUMMARY OF NETWORK RESULTS AND REQUIRED INFORMATION</b>	22
<b>Determining Data Quality and Acceptability</b> .....	22
<b>Data Completeness</b> .....	22
<b>SUMMARY OF 2023 CRITERIA POLLUTANT DATA</b>	24
<b>CARBON MONOXIDE (CO)</b> .....	24
<b>NITROGEN DIOXIDE (NO<sub>2</sub>)</b> .....	26
<b>OZONE (O<sub>3</sub>)</b> .....	28
<b>PARTICULATE MATTER ≤10 MICROMETERS (PM<sub>10</sub>)</b> .....	32
<b>PARTICULATE MATTER ≤2.5 MICROMETERS (PM<sub>2.5</sub>)</b> .....	36
<b>SULFUR DIOXIDE (SO<sub>2</sub>)</b> .....	41
<b>SUMMARY OF 2023 CRITERIA POLLUTANT NAAQS STATUS</b>	43
<b>2023 O<sub>3</sub> EXCEEDANCE, VIOLATION, AND EXCEPTIONAL EVENT INFORMATION</b> .....	44
<b>O<sub>3</sub> NAAQS Exceedances</b> .....	44

<b>O<sub>3</sub> Exceptional Events and Status of EPA Concurrence</b> .....	44
<b>2023 PM<sub>10</sub> EXCEEDANCE, VIOLATION, AND EXCEPTIONAL EVENT INFORMATION</b> .....	48
<b>PM<sub>10</sub> NAAQS Exceedances</b> .....	48
<b>2023 PM<sub>2.5</sub> EXCEEDANCE, VIOLATION, AND EXCEPTIONAL EVENT INFORMATION</b> .....	51
<b>PM<sub>2.5</sub> Annual NAAQS Exceedance and Violation Status</b> .....	51
<b>PM<sub>2.5</sub> 24-Hour NAAQS Exceedance and Violation Status</b> .....	51
<b>PM<sub>2.5</sub> Exceptional Events and Status of EPA Concurrence</b> .....	51
<b>SHARED AIR MONITORING RESPONSIBILITIES</b> .....	52
<b>Information Regarding Additional Air Monitoring within Maricopa County</b> .....	52
<b>REFERENCES</b> .....	53
<b>APPENDIX I - AIR MONITORING DATA BY SITE</b> .....	54
<b>APPENDIX II - PUBLIC NOTICE AND COMMENT INFORMATION</b> .....	135
<b>2024 PUBLIC COMMENT PERIOD ANNOUNCEMENT</b> .....	136
<b>Public Meeting Attendance – June 4th</b> .....	138
<b>Public Comments Received and MCAQD Responses</b> .....	138
<b>APPENDIX III – GLOSSARY</b> .....	139

## List of Tables

<b>Table 1 Summary of Past Network Modifications and Site Updates</b> .....	6
<b>Table 2 Projects Planned for 2024</b> .....	7
<b>Table 3 MCAQD Air Monitoring Instruments by Site</b> .....	10
<b>Table 4 National Ambient Air Quality Standards</b> .....	12
<b>Table 5 Basic SLAMS Air Monitoring Objectives</b> .....	18
<b>Table 6 Monitor Types</b> .....	19
<b>Table 7 Spatial Scales of Representativeness</b> .....	20
<b>Table 8 2023 Criteria Pollutant Data Completeness for SLAMS</b> .....	23
<b>Table 9 2023 CO Average Data Summary</b> .....	25
<b>Table 10 2023 CO Monitor Requirements</b> .....	25
<b>Table 11 2023 NO<sub>2</sub> 1-hour Data Summary</b> .....	27
<b>Table 12 2023 NO<sub>2</sub> Monitor Requirements</b> .....	27
<b>Table 13 2023 O<sub>3</sub> Eight-hour Average Summary</b> .....	30
<b>Table 14 2023 O<sub>3</sub> Monitor Requirements</b> .....	31
<b>Table 15 2023 PM<sub>10</sub> 24-Hour Average Summary</b> .....	34
<b>Table 16 2023 PM<sub>10</sub> Monitor Requirements</b> .....	35
<b>Table 17 2023 PM<sub>2.5</sub> 24-Hour and Annual Averages</b> .....	37

<b>Table 18 PM<sub>2.5</sub> 3-Year Annual Averages</b> .....	38
<b>Table 19 PM<sub>2.5</sub> 3-Year 24-Hour Averages of the 98th Percentile</b> .....	39
<b>Table 20 2023 PM<sub>2.5</sub> Data Required by EPA</b> .....	40
<b>Table 21 2023 SO<sub>2</sub> Data Summary</b> .....	42
<b>Table 22 2023 SO<sub>2</sub> Monitor Requirements</b> .....	42
<b>Table 23 2023 NAAQS Exceedances and Violation Summary</b> .....	43
<b>Table 24 2023 Violations of the PM<sub>10</sub> 24-Hour NAAQS Including EE Data</b> .....	49
<b>Table 25 2023 Violations of the PM<sub>10</sub> NAAQS Excluding Data Flagged as an EE</b> .....	50
<b>Table 26 2024 Open Forum Meeting Attendees</b> .....	138

## List of Figures

<b>Figure 1 2023 Maricopa County Air Monitoring Sites</b> .....	9
<b>Figure 2 The Air Quality Index</b> .....	14
<b>Figure 3 AirNow Web Maps</b> .....	15
<b>Figure 4 MCAQD Air Quality Status Map</b> .....	16
<b>Figure 5 2023 CO Monitoring Sites</b> .....	24
<b>Figure 6 2023 NO<sub>2</sub> Monitoring Sites</b> .....	26
<b>Figure 7 2023 O<sub>3</sub> Monitoring Sites</b> .....	29
<b>Figure 8 2023 PM<sub>10</sub> Monitoring Sites</b> .....	32
<b>Figure 9 2023 PM<sub>2.5</sub> Monitoring Sites</b> .....	36
<b>Figure 10 2023 SO<sub>2</sub> Monitoring Sites</b> .....	41
<b>Figure 11 Ozone Exceedance Days</b> .....	45
<b>Figure 12 2023 O<sub>3</sub> NAAQS Violations by Site Including Exceptional Events</b> .....	46
<b>Figure 13 2023 O<sub>3</sub> NAAQS Violations by Site Excluding Exceptional Events</b> .....	47
<b>Figure 14 2023 PM<sub>10</sub> Exceedance Days</b> .....	48
<b>Figure 15 2023 PM<sub>2.5</sub> Exceedance Days</b> .....	51
<b>Figure 16 Public Comment Period Announcement</b> .....	136

# **ABSTRACT**

In 2023, the Maricopa County Air Quality Department (MCAQD) Air Monitoring Division successfully operated a robust air quality surveillance system that monitored for regulated ambient air pollutants as per 40 CFR Parts 50 and 58. The air monitoring data produced are intended for regulatory compliance determinations of criteria air pollutants. Unless otherwise noted, each monitor meets the requirements of 40 CFR Part 58 – Subpart G - Appendices A, B, C, D, and E, where applicable.

MCAQD strives to provide the most reliable and relevant air monitoring data to the public. High-quality data are a cornerstone of developing and implementing effective State Implementation Plans (SIPs), Exceptional Event (EE) packages, and operating permits for new and existing sources, for the protection of human health and the environment.

This Air Monitoring Network Plan provides information regarding the air monitoring surveillance system operating within Maricopa County, covers changes made to the air monitoring network in 2023, and discusses network changes planned for 2024. Please refer to Appendix III for the glossary of terms and acronyms.

# Network Modifications and Site Updates

## Summary of Past Network Modifications and Site Updates

Table 1 Summary of Past Network Modifications and Site Updates

Date	Site	Monitor/ Type	Description
2023	Mesa, Tempe, Thirty-Third	Data Logger	Replaced outdated ESC-8832 data logger with the Agiliare <sub>LLC</sub> /ESC-8864 data logger.
2024	Buckeye, Glendale, North Phoenix, South Scottsdale	Data Logger	Replaced outdated ESC-8832 data logger with the Agiliare <sub>LLC</sub> /ESC-8864 data logger.
2024	Infrastructure	Data Servers	Transitioned from cloud-hosted data servers to on-premises data hosting. This change allowed us to create a production environment to house our continuous monitoring data and a development environment which allows us to develop and test improvements to our data collection system.

## Proposed Network Modifications and Site Updates

MCAQD does not anticipate any significant interruptions to monitoring operations in 2024 and plans on continuously updating existing sites and improving site safety and security. Improvements to power supplies or communication systems will occur as needed.

**Table 2 Projects Planned for 2024**

<b>Planned Date</b>	<b>Site</b>	<b>Monitor/ Type</b>	<b>Description</b>
2024	Falcon Field (04-013-1010)	Ozone, Wind Speed, Wind Direction	Searching for a new site location to improve access and sample line configuration, and to allow for a wind tower to be secured. Due to safety concerns at the current site location, MCAQD discontinued monitoring for wind speed and wind direction in March of 2021.
2024	Cave Creek (04-013-4008)	Ozone	Relocation of the analyzer and meteorological equipment to a dedicated shelter. The current location has undependable climate control; thus relocation provides better access and data reliability for monitoring at the site.
2024	Scottsdale (04-013-3003)	Ozone, PM <sub>10</sub>	Contacted the City of Scottsdale to obtain permission to place a shelter at the site. This will allow for better placement of the ozone sample cane and PM <sub>10</sub> sampler. The move is planned as a safety precaution to prevent technicians from having to access the roof of a building.
2024	Buckeye (04-013-4011)	Special Purpose Monitor for PM <sub>2.5</sub>	In light of the 2024 update to the PM <sub>2.5</sub> primary standard, MCAQD will be setting up a special purpose PM <sub>2.5</sub> monitor at the current Buckeye site. This study will help to determine PM <sub>2.5</sub> measurements in the western parts of Maricopa County.
2024	West Phoenix (04-013-0019)	PM Speciation Monitor Study	A MetOne SuperSASS instrument will be installed at the West Phoenix site to collect PM <sub>2.5</sub> speciation data. This study will be conducted in conjunction with ADEQ and Pinal County in an attempt to better understand the types of PM <sub>2.5</sub> present in the greater Phoenix area.

# Introduction

This Annual Monitoring Network Plan (AMNP) addresses the United States Environmental Protection Agency's (U.S. EPA) requirements for operating the surveillance system as per 40 CFR Part 58 - Ambient Air Quality Surveillance. As per 40 CFR Part 58, Subpart B §58.10(a)(1), the EPA requires each air monitoring organization operating within the U.S. and its territories to develop and submit an AMNP annually by July 1<sup>st</sup>, following a 30-day public comment period. Each year, MCAQD solicits comments from the public during the public comment period and holds an open forum public meeting. As needed, MCAQD amends the final draft based on any comments received. The final AMNP is submitted to EPA Region 9 for review and approval. The EPA Region 9 Administrator, or their representative, must approve any requests for network changes and waivers. EPA Region 9 completes the review process within 120 days. MCAQD will post the final AMNP on the MCAQD Air Monitoring website.

In addition to the annual data certification process, the network plan helps MCAQD continuously review, assess, and improve how well the air monitoring surveillance system, or network, is performing. Data certification for 2023 was submitted to EPA Region 9 on April 30, 2024. The design and performance of the ambient air monitoring network and data certification process are covered by the regulatory requirements found in:

- 40 CFR Part 58 – Ambient Air Quality Surveillance: Subpart A (General Provisions), Subpart B (Monitoring Network), Subpart C (Special Purpose Monitors (SPM)), Subpart D (Comparability of Ambient Data to the NAAQS), Subpart F (Air Quality Index (AQI) Reporting), and Subpart G (Federal Monitoring).

The network plan also addresses the following regulatory requirements:

- 40 CFR Part 58 Appendix A - [Quality Assurance Requirements for Monitors used in Evaluations of National Ambient Air Quality Standards](#)
- 40 CFR Part 58 Appendix C - [Ambient Air Quality Monitoring Methodology](#)
- 40 CFR Part 58 Appendix D - [Network Design Criteria for Ambient Air Quality Monitoring](#)
- 40 CFR Part 58 Appendix E - [Probe and Monitoring Path Siting Criteria for Ambient Air Quality Monitoring](#)
- 40 CFR Part 58, Appendix G – [Uniform Air Quality Index \(AQI\) and Daily Reporting](#)

The following information is covered in this network plan:

- Purpose and type of monitoring conducted at each site;
- Detailed descriptions and metadata for each site;
- Metadata for each pollutant monitor;
- Three years of criteria pollutant data from each monitor;
- Design value metrics that identify the monitoring site with the highest O<sub>3</sub>, and PM<sub>2.5</sub> concentrations measured over the past 3 years;
- The minimum quantity of monitors required for each criteria pollutant;
- Summaries of pollutant data by network and required statistical analyses;

- The quality and suitability of pollutant data for comparison to the National Ambient Air Quality Standards (NAAQS);
- The compliance status of monitors, including exceedance days and violations;
- Proposed changes to the pollutant networks, sites and monitoring methods planned for the current year;
- Brief information regarding special purpose and/or research-driven air monitors, if operated;
- The reporting of real-time pollutant and meteorological data to the public via the MCAQD web map and AIRNow;
- Any requests for waivers from specific air monitoring requirements, if applicable;
- Public comments received and MCAQD's responses regarding the final draft of the Annual Monitoring Network Plan.

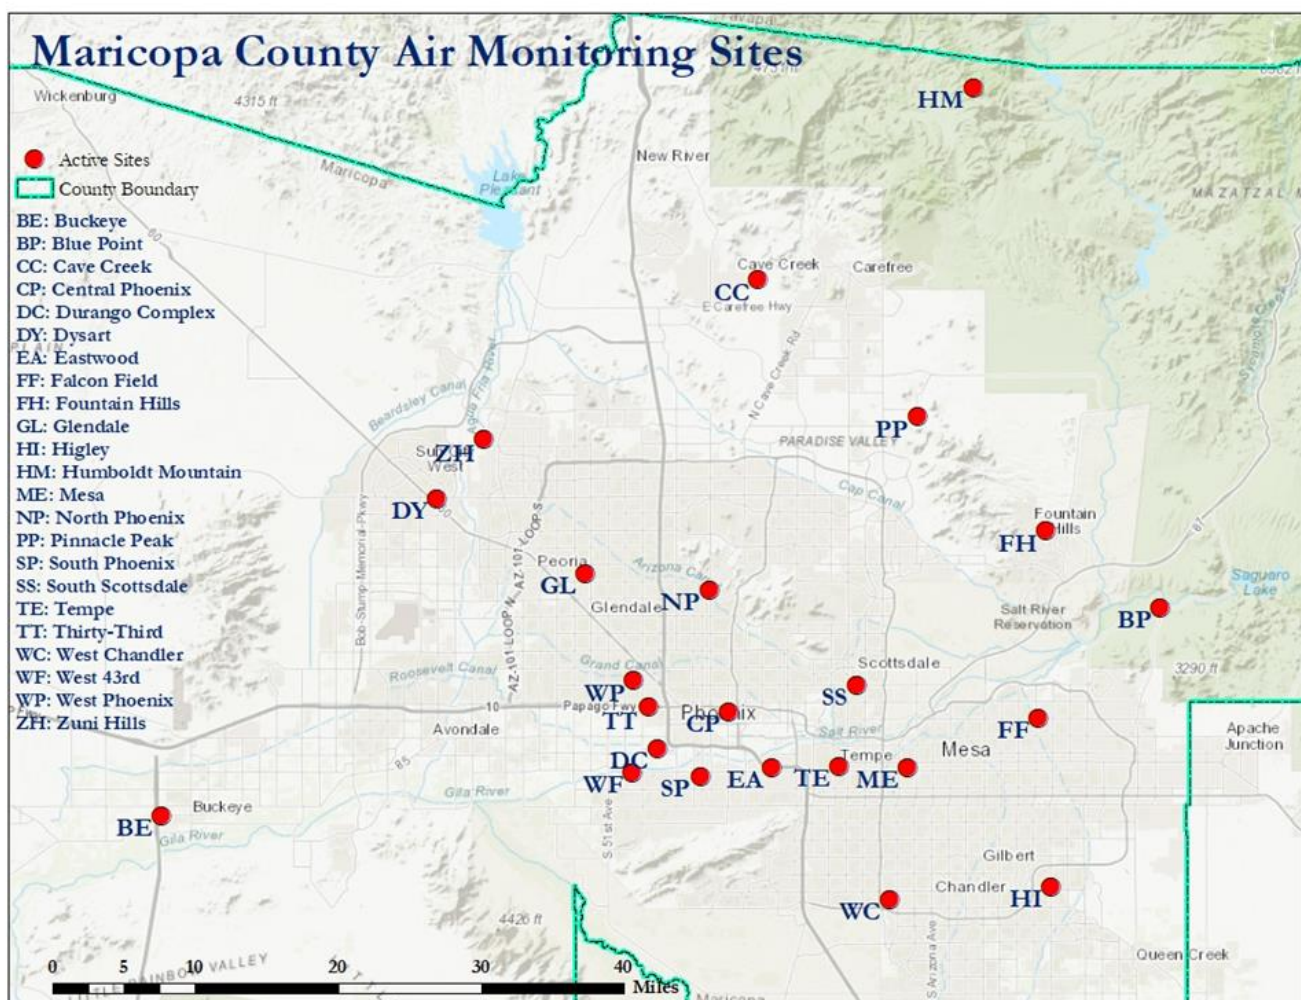


Figure 1 2023 Maricopa County Air Monitoring Sites

Table 3 MCAQD Air Monitoring Instruments by Site

Maricopa County - Air Monitoring Instrumentation																		
Site	AQS Code	CO	NO <sub>2</sub>	O <sub>3</sub>	SO <sub>2</sub>	PM <sub>10</sub>	PM <sub>2.5</sub>	PM <sub>2.5</sub> Filter	Black Carbon	WS / WD	Baro Press	Amb Temp	Rel Hum	Rain Gauge	Solar Rad	Shelter Temps	Multi-Gas Calibrator	Active Instruments <sup>2</sup>
Buckeye	BE	04-013-4011	1	1	1		1			1	1	1	1			1	2	11
Blue Point	BP	04-013-9702			1					1		1	1			1		5
Cave Creek	CC	04-013-4008			1					1		1	1	1		1		6
Central Phoenix	CP	04-013-3002	1	1	1	1	1			1	1	1	1			2	2	13
Durango Complex	DC	04-013-9812				1	1	1	*1	1	1	1	1			1	1	9
Dysart	DY	04-013-4010			1		1			1	1	1	1			1		7
Eastwood	EA	04-013-4021	1	1			1			1	1	1	1			1	2	10
Falcon Field	FF	04-013-1010			1							1	1			1		4
Fountain Hills	FH	04-013-9704			1					1	1	1	1			1		6
Glendale	GL	04-013-2001			1		1	1		1	1	1	1			1		8
Higley	HI	04-013-4006					1			1	1	1	1			1		6
Humboldt Mountain	HM	04-013-9508			1							1	1			1	1	5
Mesa	ME	04-013-1003	1		1		1	1	**1	1	1	1	1			1	1	10
North Phoenix	NP	04-013-1004			1		1	1	**1	1	1	1	1			1		8
Pinnacle Peak	PP	04-013-2005			1				**1	1	1	1	1			1		6
South Phoenix	SP	04-013-4003	1		1		1	1	*1	1	1	1	1		1	2	1	12
South Scottsdale	SS	04-013-3003			1		1			1	1	1	1			2		8
Tempe	TE	04-013-4005			1		1	1		1	1	1	1	1		2		10
Thirty-Third <sup>1</sup>	TT	04-013-4020		1						1						1	2	5
West Chandler	WC	04-013-4004	1		1		1			1	1	1	1			2	1	10
West 43rd	WF	04-013-4009					1			1	1	1	1			1		6
West Phoenix	WP	04-013-0019	1	1	1		1	1	1	*1	1	1	1			1	2	13
Zuni Hills	ZH	04-013-4016					1			1	1	1	1			1		6
<b>Active Instruments</b>			<b>7</b>	<b>5</b>	<b>17</b>	<b>2</b>	<b>15</b>	<b>8</b>	<b>1</b>	<b>3</b>	<b>21</b>	<b>18</b>	<b>22</b>	<b>22</b>	<b>2</b>	<b>1</b>	<b>28</b>	<b>15</b>

**Total # of Criteria Pollutant Monitors 55**  
**Total # of Active Instruments 187**  
**Total # of Active Sites 23**

**NOTES:**

Black Carbon 1060 \* 04/1 - 09/30 (O<sub>3</sub> Season)  
 \*\* 10/1 - 03/31 (PM<sub>2.5</sub>)

<sup>1</sup> CO and PM2.5 Analyzers removed from site on 2/28/21

<sup>2</sup> Active instruments will increase and decrease based on location of Black Carbon.

## **Clean Air Act and Criteria Pollutants**

The Clean Air Act (CAA), and its amendments, provide the framework for pertinent State/Local/Tribal agencies to assess and protect air quality through an air monitoring program. Unless generated for research, special studies, or unless otherwise noted, each monitor meets the requirements of 40 CFR Part 58 – Subpart G - Appendices A, B, C, D, and E, where applicable. This means that the data MCAQD produces are of acceptable quality for NAAQS comparisons and compliance determinations, which is the primary purpose for generating the data. Please note that 40 CFR Part 58 Subpart G Appendix B applies to PSD monitoring only, and that no PSD monitoring was conducted within Maricopa County during this time period.

MCAQD monitors for five criteria pollutants, which are:

1. Carbon monoxide (CO)
2. Nitrogen oxides (NO<sub>x</sub>) with nitrogen dioxide (NO<sub>2</sub>) used as the indicator compound
3. Ozone (O<sub>3</sub>)
4. Particulate matter ≤10 micrometers (PM<sub>10</sub>) and ≤2.5 micrometers (PM<sub>2.5</sub>)
5. Sulfur dioxide (SO<sub>2</sub>)

## **The National Ambient Air Quality Standards**

The U.S. EPA regulates criteria pollutants according to the NAAQS, which establish ambient levels for each, using health and welfare-based criteria. There are two sets of NAAQS standards. As per CAA §109(b), the primary NAAQS are designed to provide an adequate margin of safety that is requisite to protecting public health. The secondary NAAQS are designed to protect public welfare from any known or anticipated adverse effects associated with the presence of a pollutant in the ambient air such as damage to properties such as farm crops and buildings, visibility impairment in national parks and wilderness areas, and for the protection of ecosystems. NAAQS are geared toward improving air quality in geographical areas where the current quality is unacceptable as well as preventing air quality deterioration in geographical areas where the air is relatively free of pollution. Since each pollutant has different health effects and environmental damage potential, NAAQS level(s) are different for each pollutant. Some pollutants have standards for both long-term and short-term averaging times. The short-term standards are designed to protect against acute health effects, while the long-term standards are designed to protect against chronic health effects.

The NAAQS are not static. The CAA requires that they undergo periodic review using the most recent medical, epidemiological, physiological, and ecosystem research available. Historically, when a NAAQS level changes; the new level(s) is lower. The NAAQS review is a lengthy process that assesses the science upon which each NAAQS is based as well as the standard itself. The Clean Air Scientific Advisory Committee (CASAC) provides independent advice to the U.S. EPA concerning the need to change a standard. In addition, comments are solicited from the public. More information regarding the [NAAQS review process](#) is available at EPA's website.

U.S. EPA's Regional Offices oversee the enforcement of the CAA, and MCAQD falls under the jurisdiction of EPA Region 9. U.S. EPA OAQPS oversees the air monitoring program at a national level, leads regulatory and/or policy changes affecting air monitoring operations and quality requirements, and engages in the review of the NAAQS.

**Table 4 National Ambient Air Quality Standards**

<b>Pollutant</b>	<b>Standard Type</b>	<b>Averaging Time</b>	<b>Level</b>	<b>Form</b>	
Carbon Monoxide (CO)	primary	8 hours	9 ppm	Not to be exceeded more than once per year	
		1 hour	35 ppm		
Lead (Pb)	primary and secondary	Rolling 3-month average	0.15 µg/m <sup>3</sup>	Not to be exceeded	
Nitrogen Dioxide (NO <sub>2</sub> )	primary	1 hour	100 ppb	98th percentile of 1-hour daily maximum concentrations, averaged over 3 years	
	primary and secondary	1 year	53 ppb	Annual Mean	
Ozone (O <sub>3</sub> ) *	primary and secondary (2015)	8 hours	0.070 ppm	Annual fourth-highest daily maximum 8-hour concentration, averaged over 3 years	
	primary and secondary (2008)	8 hours	0.075 ppm	Annual fourth-highest daily maximum 8-hour concentration, averaged over 3 years	
Particle Matter (PM)	PM <sub>2.5</sub>	primary	1 year	12.0 µg/m <sup>3</sup>	Annual mean, averaged over 3 years
		secondary	1 year	15.0 µg/m <sup>3</sup>	Annual mean, averaged over 3 years
		primary and secondary	24 hours	35 µg/m <sup>3</sup>	98th percentile, averaged over 3 years
	PM <sub>10</sub>	primary and secondary	24 hours	150 µg/m <sup>3</sup>	Not to be exceeded more than once per year on average over 3 years
Sulfur Dioxide (SO <sub>2</sub> )	primary	1 hour	75 ppb	99th percentile of 1-hour daily maximum concentrations, averaged over 3 years	
	secondary	3 hours	0.5 ppm	Not to be exceeded more than once per year	

\* Maricopa County is designated as Moderate for 2008 and Marginal for 2015 O<sub>3</sub> standard.

Source: <https://www.epa.gov/criteria-air-pollutants/naqs-table>  
[https://www3.epa.gov/airquality/greenbook/anayo\\_az.html](https://www3.epa.gov/airquality/greenbook/anayo_az.html)

## Forecasting and Reporting Air Quality Conditions

This section provides information regarding the use and reporting of continuous, real-time data at the County and national level. It also provides historical information on how the reporting of air quality conditions has improved over the years.

### Air Quality Forecasting

Forecasting air quality depends upon having air quality data available that can be put into a model which generates information needed for meteorologists to make forecasts. Monitoring instrumentation measures and reports hourly data to monitoring organizations (MO) for distribution to AirNow. The readily available data are invaluable to air quality forecasters because they can better predict what the Air Quality Indicators (AQI) will be.

The Arizona Department of Environmental Quality (ADEQ) and MCAQD developed a year-round air quality forecasting and “restriction” reporting process for the Phoenix metropolitan area. In Maricopa County, ADEQ is lead for air quality forecasting and issuing a “High Pollution Advisory” (HPA) or a “Health Watch” (HW), while MCAQD designates a “No Burn Day”. [MCAQD’s website](#) provides a description of each of these restrictions and provides helpful information on improving air quality.

### The EPA Air Quality Index and NowCast

Since the 1950s, as per [40 CFR Part 58, Appendix G, the Uniform Air Quality Index \(AQI\) and Daily Reporting](#), the EPA has required that MOs report air quality conditions to the public regarding criteria pollutant health risks based upon data from their network. To do so, EPA developed the AQI, which is a health risk communication tool that converts pollutant concentrations into six health-impact related color-coded indices based upon the NAAQS. Members of the public use the AQI forecast to reduce their exposure to air pollution and its associated health effects by modifying their daily activities. The AQI graduated color scheme is shown in Figure 2.

Air Quality Index Levels of Health Concern	Numerical Value	Meaning
Good	0 to 50	Air quality is considered satisfactory, and air pollution poses little or no risk.
Moderate	51 to 100	Air quality is acceptable; however, for some pollutants there may be a moderate health concern for a very small number of people who are unusually sensitive to air pollution.
Unhealthy for Sensitive Groups	101 to 150	Members of sensitive groups may experience health effects. The general public is not likely to be affected.
Unhealthy	151 to 200	Everyone may begin to experience health effects; members of sensitive groups may experience more serious health effects.
Very Unhealthy	201 to 300	Health alert: everyone may experience more serious health effects.
Hazardous	301 to 500	Health warnings of emergency conditions. The entire population is more likely to be affected.

Note: Values above 500 are considered Beyond the AQI. Follow recommendations for the "Hazardous category." Additional information on reducing exposure to extremely high levels of particle pollution is available [here](#).

**Figure 2 The Air Quality Index**

**Source:** 40 CFR Part 58, Appendix G – Uniform Air Quality Index and Daily Reporting ([AQI Basics](#))

In the early 2000s, AirNow began using “NowCast” values that tried to reflect current conditions. However, values were based upon each pollutant’s NAAQS averaging time, and it was recognized that these formulas do not respond well to real-time, rapidly changing air quality conditions. For instance, in the desert areas of the Southwest during the monsoon season, dust storms often emerge and dissipate within several hours. These events can drive PM<sub>10</sub>, and sometimes PM<sub>2.5</sub>, concentrations into the unhealthy range. Since the NAAQS averaging time for PM<sub>10</sub> is 24 hours, a dust storm the evening before can cause air quality conditions to show in the orange range or higher the following day even though the sky is clear and no impact for the prior day’s event is affecting present conditions. Smoke from a brief fire can adversely affect air quality for PM<sub>2.5</sub> likewise.

The abundance of continuous data in the last decade has furthered our understanding of pollutants, especially PM<sub>2.5</sub>. This information helped improve the NowCast formulas so values better reflect rapidly changing conditions. To develop the new formulas, EPA analyzed millions of data points gathered from all parts of the U.S. Since PM<sub>10</sub>, PM<sub>2.5</sub>, and O<sub>3</sub> make up most air pollution concerns throughout the U.S., the updated NowCast reports on health risks related to these pollutants, only.

The formulas use a shorter averaging time when a pollutant’s concentration is high and a longer averaging time when a pollutant’s concentration is low, and conditions are stable. To read more about how the most recent NowCast formulas were developed, visit the [AirNow FAQ](#) section.

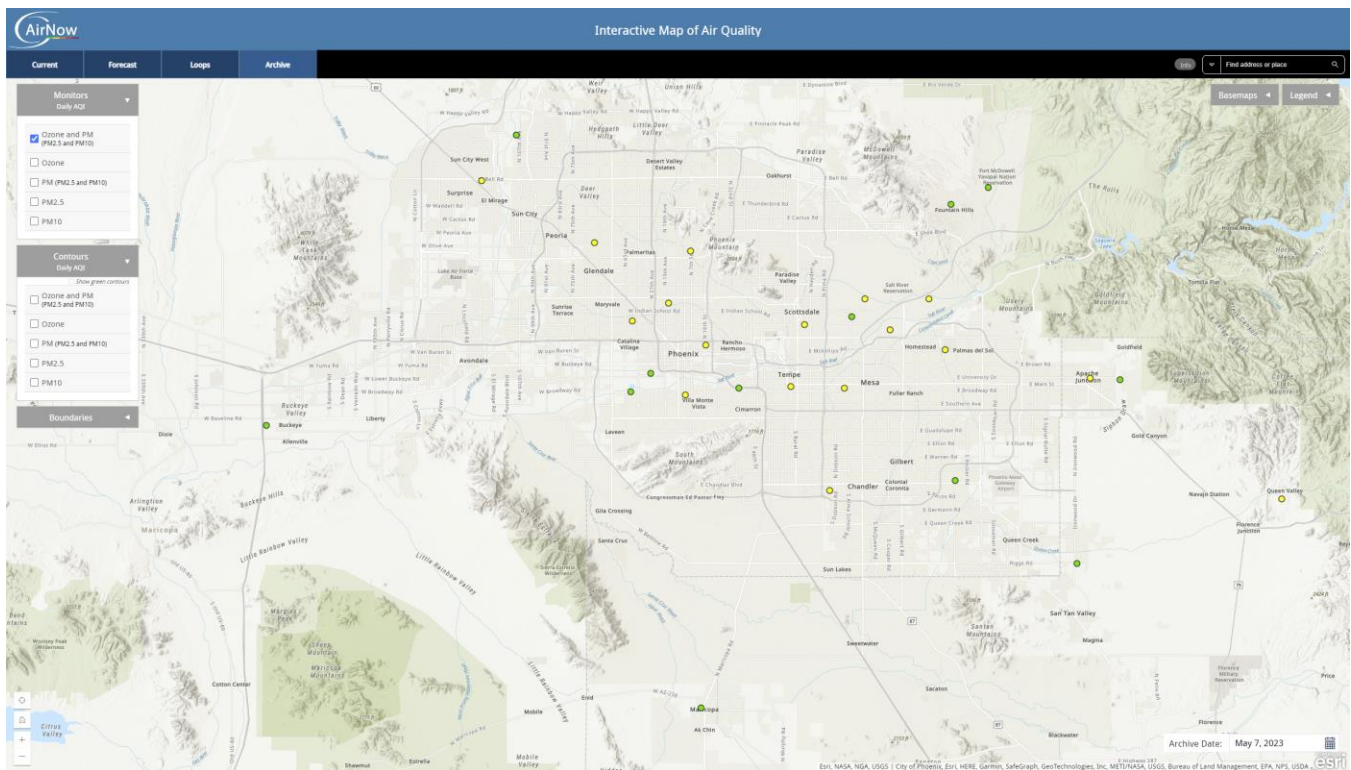


Figure 3 AirNow Web Maps

The EPA’s [AirNow website](#) communicates the status of air quality conditions throughout the country. The MCAQD has participated in the AirNow program since 2001. The MCAQD distributes 1-hour continuous pollutant and select meteorological data to the AirNow website. The AirNow maps cover a geographical area as far east as Queen Creek, as far south as Casa Grande, and as far west as the town of Palo Verde. Air quality data from other Local, Tribal, and National Park Service air monitoring operations within Arizona populate the map as well.

### The Maricopa County Interactive Air Quality Map

The MCAQD provides real-time data on our website using an [interactive air quality map](#) with three layers of information. Figure 4 shows the default ‘Current Conditions’ map, which uses the latest NowCast formula to provide a site’s Maximum NowCast value for either PM<sub>10</sub>, PM<sub>2.5</sub> or O<sub>3</sub>, as well as the latest formulas for each of the three pollutants’ NowCast values. The second tab shows the AQI developed by an unofficial, rolling formula. The map also serves as a way to gather Raw Data from the air quality monitors, which provides hourly CO, NO<sub>2</sub>, O<sub>3</sub>, PM<sub>2.5</sub>, SO<sub>2</sub>, and 5-minute concentrations for PM<sub>10</sub> and meteorological data from each site.

# MARICOPA COUNTY AIR QUALITY STATUS MAP

AQI

[Login]

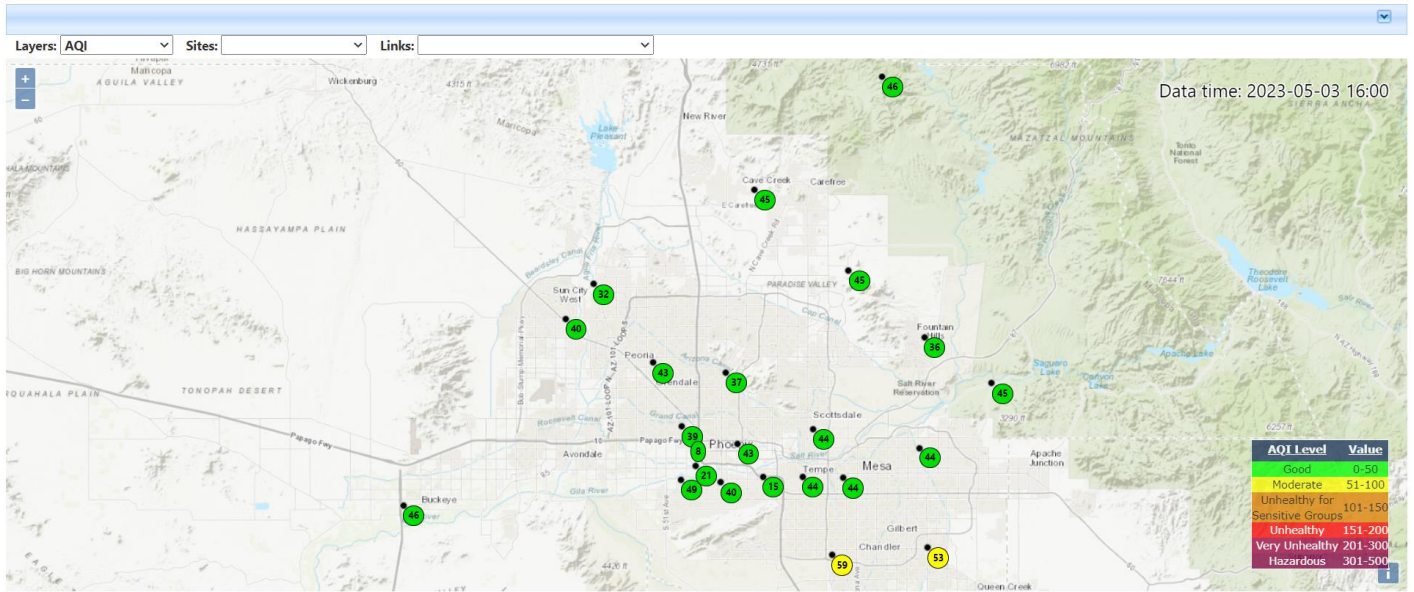


Figure 4 MCAQD Air Quality Status Map

# **Air Monitoring Strategies and Surveillance System Design**

## **Overview of Air Monitoring Requirements and System Design**

The MCAQD operated and maintained 23 ambient air monitoring sites throughout Maricopa County in 2023. The sites' start-up dates range from 1961 for Central Phoenix to 2021 for the Eastwood site. Land use patterns around the sites vary from densely populated urban areas to sparsely populated rural settings. The sites' elevations range from 845 feet above sea level at Buckeye to 5190 feet above sea level at the top of Humboldt Mountain. MCAQD chose each site and its pollutant monitors based on specific EPA requirements, special requests from EPA, and/or specific needs of the County.

Requirements for operating an ambient air monitoring program are found in 40 CFR Parts 50 and 58. The MCAQD holds the Primary Quality Assurance Organization (PQAO) designation for the County's ambient air monitoring network and is fully responsible for designing and operating the total air monitoring surveillance system and managing the pollutant data generated. MCAQD operates air monitors at EPA-approved State and Local Air Monitoring Stations (SLAMS), which includes near-road monitoring stations. On occasion, special air monitoring initiatives involve temporarily operating monitors designated as Special Purpose Monitors (SPM), as well as special studies.

This section details how each Ambient Air Quality network is designed to obtain "representative" data as per 40 CFR Part 58 Appendix D. To determine compliance with the NAAQS, EPA-approved air monitors must be used to collect pollutant data. The EPA classifies approved monitor methods into one of three categories: a federal reference method (FRM), a federal equivalent method (FEM), or an approved regional method (ARM). The MCAQD uses FRM and FEM monitors. This practice ensures high-quality data are used for compliance-driven decisions.

However, data from research monitors, e.g., non-compliance-related monitors, can be used to develop state and/or federal attainment and maintenance plans, further evaluate regional air quality models used in developing emissions control strategies, tracking trends in air pollution, and evaluating the impact control measures are having on improving air quality. Any short-term research data collected by the MCAQD can be made available to decision makers, but the data are not reported to AQS.

Within Maricopa County, the ADEQ collects compliance data as well as research data at the JLG Supersite via the following EPA monitoring networks: National Core multi-pollutant site (NCore), Photochemical Ambient Monitoring Stations (PAMS), Chemical Speciation Network (CSN), and National Air Toxics Trends Stations (NATTS). ADEQ also collects air toxics samples for the Urban Air Toxics Monitoring Program (UATMP) at MCAQD's South Phoenix

site. The data from these networks are reported to EPA and should be available in AQS and/or another EPA database.

In addition to producing an annual network plan, the EPA requires a five-year network assessment as per 40 CFR Part 58.10. The 5-year assessment is best served by collaborating with EPA, ADEQ, and other local and/or tribal Monitoring Organizations. MCAQD last completed the assessment in 2020. The assessment process continues to improve, and MCAQD works with other Monitoring Organizations regarding network design issues as needed. Monitoring Organizations within Arizona may provide support to each other by exchanging technical services and/or knowledge when problems arise with instrumentation or when conducting special studies.

## Basic Air Monitoring Objectives

Each ambient air monitor must have a designated basic monitoring objective. The objectives in Table 5 apply to establishing required SLAMS monitoring stations and choosing the general locations for additional monitoring sites. The objectives are not listed based on importance or priority; however, each objective is important and must be considered individually.

**Table 5 Basic SLAMS Air Monitoring Objectives**

<b>Objective</b>	<b>Description</b>
Provide air pollution data to the general public in a timely manner	Data can be presented to the public in a number of ways including air quality maps, newspapers, MOs, and EPA websites, and as part of weather forecasts and public advisories.
Support compliance with ambient air quality standards and emissions strategy development	Data from EPA-approved monitors for NAAQS pollutants will be used for comparing an area’s air pollution levels.
Support for air pollution research studies	Supplemental data useful with health effect assessments, atmospheric processes, or monitoring methods development work.

Source: 40 CFR Part 58 Appendix D, 1.1(a – c)

## Monitor Types

Pollutant monitor types must be designated as shown in Table 6 and are based upon how the data will be used and how long the monitor will remain in operation. The MCAQD’s air monitoring network is comprised of SLAMS, which gather data for comparison to the NAAQS. The MCAQD may operate SPMs temporarily; however, no SPMs or PSD monitors were operated in 2023.

**Table 6 Monitor Types**

<b>Name</b>	<b>Description</b>
SLAMS (State and Local Air Monitoring Stations)	EPA-approved, compliance monitor typically operated on a long-term basis. Measure criteria pollutants for comparison to the NAAQS.
SPM (Special Purpose Monitors)	A monitor typically operated on a short-term basis and not necessarily EPA-approved. These monitors are useful for gathering and reporting preliminary information regarding air quality in a local area quickly and over a short-term period, which is less than two years. In the event of a geographical area's population increasing or data indicating that a SLAMS is more appropriate; an SPM may be reclassified to SLAMS and potentially outfitted with a different method. 40 CFR Part 58.20 Subpart C
PSD (Prevention of Significant Deterioration)	A monitor typically operated for less than two years prior to a source opening in a protected Class A area and usually required by the permitting authority. PSDs are operated for the purpose of establishing the effect on air quality of the emissions from a proposed source for purposes of preventing significant deterioration to a "protected" area, e.g., a Class 1 area. Class 1 areas include national parks and wilderness areas where a major effort is underway to improve visibility and air quality.

Source: 40 CFR Part 58

## **Site Types**

To support the three basic monitoring objectives, each site must be identified as one of the six "site types" shown below and may vary within each pollutant's network. The site type is key to informing air quality professionals and the public about a pollutant's peak concentration levels. The six general site types as defined in 40 CFR Part 58, Appendix D.1 are:

- Sites for determining the **highest concentrations** expected to occur in the area covered by the network.
- Sites for measuring typical concentrations in areas of **high population density (population exposure)**.
- Sites for determining the impact of significant **sources** or source categories on air quality.
- Sites for determining general **background concentration** levels.
- Sites for determining the extent of **regional pollutant transport** among populated areas and in support of secondary standards.

- Sites for measuring air pollution impacts to visibility, vegetation damage, or other welfare-based impacts.

## Monitoring Scales (Spatial Scales of Representativeness)

To help link the site type with a monitor’s basic monitoring objective and physical location, EPA uses the spatial scale of representativeness concept as described in 40 CFR Part 58, Appendix D 1.2 (a) and (b). The goal is to correctly match the spatial scale represented by an air sample with the spatial scale most appropriate for the site type, air pollutant to be measured, and the monitoring objective. Table 7 shows the scales of representativeness that are of most interest for the air monitoring site types described above.

**Table 7 Spatial Scales of Representativeness**

<b>Name</b>	<b>Distance</b>
Micro Scale	0 to 100 meters
Middle Scale	100 to 500 meters
Neighborhood Scale	0.5 to 4 kilometers
Urban Scale	4 to 50 kilometers
Regional Scale	10s to 100s of kilometers
National and Global Scales	Characterize the nation and the globe as a whole

Source: 40 CFR Part 58, Appendix D 1.2

## **Overview of the Air Monitoring Sites**

According to the U.S. Census Bureau, Maricopa County's most recent population estimate is 4,551,524 people ([U.S. Census Bureau: Quick Facts Population Estimate for Maricopa County](#)). As per 40 CFR Part 58, the EPA mandates the minimum quantity of monitors required by a pollutant's network to properly represent the County's population. The MCAQD pollutant networks are designed using the concept of spatial scale representativeness and monitoring objectives. This results in Ambient Air Monitoring networks that meet, and in most cases exceed, the minimum quantity of monitors required by EPA. Additional information on the siting of air monitors can be found in Appendix I of this network plan.

# SUMMARY OF NETWORK RESULTS AND REQUIRED INFORMATION

## Determining Data Quality and Acceptability

This section details the results obtained from our 2023 monitoring year. The EPA has established data quality and measurement quality objectives for pollutant data. In addition to 40 CFR Part 58, the EPA [QA Handbook for Air Pollution Measurement Systems: “Volume II: Ambient Air Quality Monitoring Program”](#) provides extensive information regarding the quality system and its components. There are seven data quality indicators (DQI) established by the EPA to determine the quality of ambient air data. Data must meet each indicator’s requirement to be certified and acceptable for use by decision makers for NAAQS compliance determinations, researchers, and the public.

These indicators are precision, bias, completeness, comparability, detectability, representativeness, and sensitivity. “Timeliness” of data collection, validation, and upload to AQS is important as well. “Accuracy” is now defined as a measure of the overall agreement of a measurement to a known value and includes a combination of random error (precision) and systematic error (bias) components of both sampling and analytical operations. The MCAQD’s personnel evaluate data using these indicators, with precision, bias, and completeness being the most crucial to evaluate on an ongoing basis.

## Data Completeness

Before considering any data set valid, it must first pass a data recovery, or completeness, test. The test requirements begin with checking completeness at hourly and 24-hour concentration values, or ‘samples’. The pollutant data measurements from continuous analyzers are based on a valid hour, while filter samples from manual samplers are based on a 24-hour sampling period from midnight-to-midnight. Equation 1 shows the calculation for the data completeness percentage, which is the quantity of valid measurements divided by the quantity of scheduled measurements, multiplied by one hundred. For data, completeness must be greater than 75% for a data set to pass the first validity test. Furthermore, data completeness requirements may vary and use multiple levels of data aggregation, e.g., 1-hour, 3-hour, 8-hour, 24-hour, quarterly, annual, and multiple years.

### Equation 1

$$\text{Data Completeness (\%)} = \frac{\text{Quantity of Valid Measurements}}{\text{Quantity of Scheduled Measurements}} \times 100\%$$

**Table 8 2023 Criteria Pollutant Data Completeness for SLAMS**

<b>Pollutant</b>	<b>CO</b>	<b>O<sub>3</sub></b>	<b>NO<sub>2</sub></b>	<b>SO<sub>2</sub></b>	<b>PM<sub>2.5</sub></b>	<b>PM<sub>10</sub></b>	<b>Total</b>
<b>Percent Complete</b>	86.9	98.7	94.0	99.0	97.6	97.3	96.2

Source: EPA AQS 2023 Data Completeness Report (AMP430)

# Summary of 2023 Criteria Pollutant Data

This section covers the 2023 data generated by each network.

## Carbon Monoxide (CO)

Figure 5 shows the CO monitoring sites operating in 2023. A CO monitor is required at one MCAQD near-road site. The CO data were reported to AQS, and the data are suitable for comparison to the NAAQS.

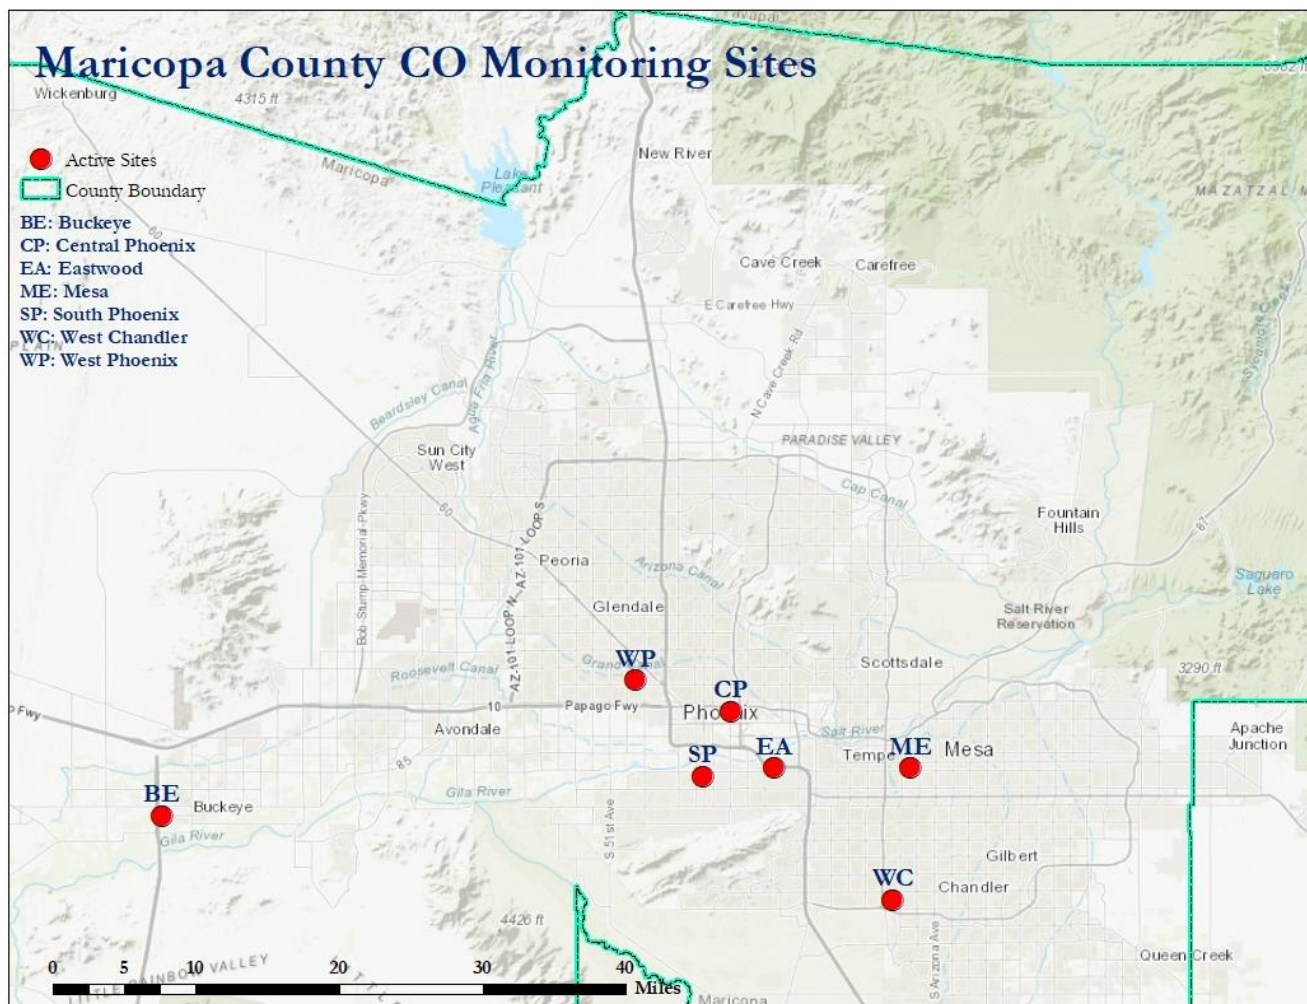


Figure 5 2023 CO Monitoring Sites

In 2023, no exceedances or violations of the 1-hour or 8-hour CO NAAQS occurred at any MCAQD sites, and concentrations remained well below NAAQS levels. Table 9 shows the maximum and second maximum 1-hour and 8-hour CO averages measured.

**Table 9 2023 CO Average Data Summary**

<b>Site</b>	<b>CO 1-hour Average Maximum (ppm)</b>	<b>CO 1-hour Average 2<sup>nd</sup> Maximum (ppm)</b>	<b>CO 8-hour Average Maximum (ppm)</b>	<b>CO 8-hour Average 2<sup>nd</sup> Maximum (ppm)</b>
Buckeye	0.8	0.6	0.5	0.5
Central Phoenix	2.8	2.4	1.7	1.7
Eastwood	1.6	1.5	1.2	1.2
Mesa	2.3	1.8	1.2	1.2
South Phoenix	2.8	2.7	2.0	1.8
West Chandler	2.0	1.4	1.1	1.0
West Phoenix	3.2	3.0	2.2	2.1

Source: EPA AQS 2023 Quicklook Criteria Report (AMP450)

**Table 10 2023 CO Monitor Requirements**

<b>CBSA</b>	<b>Population Estimate (2023)</b>	<b>Required Near-Road Monitors</b>	<b>Active Near-Road Monitors</b>	<b>Additional Near-Road Monitors Needed</b>
38060	4,585,871	1	1	0

Source: [U.S. Census Bureau: Quick Facts Population Estimate for Maricopa County](#)

# Nitrogen Dioxide (NO<sub>2</sub>)

Figure 6 shows the five NO<sub>2</sub> monitoring sites which operated in 2023. The NO<sub>2</sub> monitors at the Buckeye, Central Phoenix, and West Phoenix sites are designated as SLAMS, which represent the NO<sub>2</sub> concentrations within Maricopa County. The near-road network requires two NO<sub>2</sub> monitors in the metropolitan area. The Thirty-Third and Eastwood site monitors are the designated near-road monitors representing the microscale by collecting source-oriented emissions from vehicular traffic on heavily travelled highways within Maricopa County.

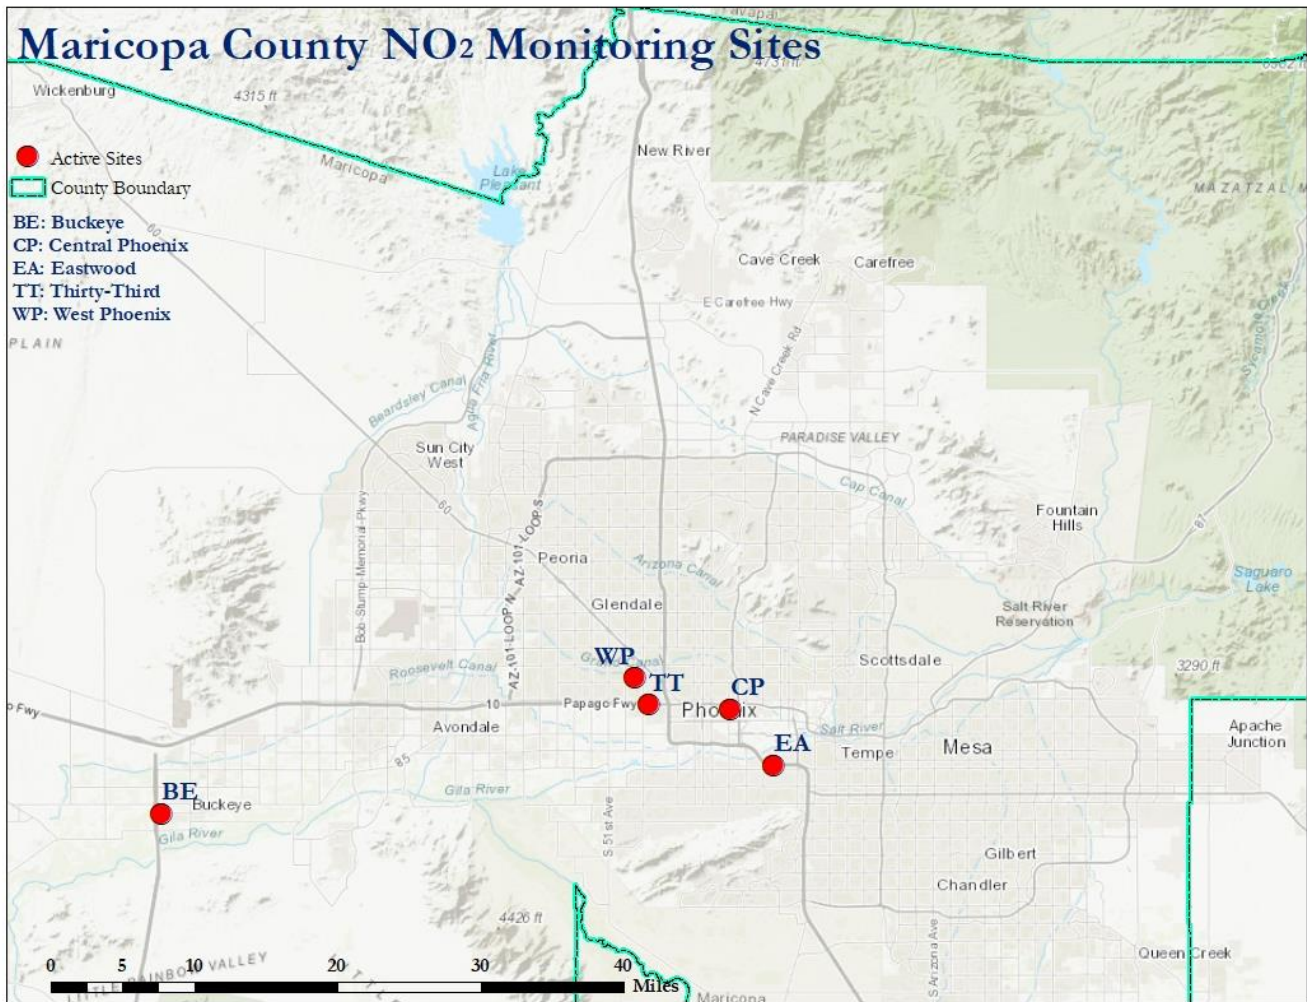


Figure 6 2023 NO<sub>2</sub> Monitoring Sites

Data from both the area-wide and near-road monitors were reported to AQS, and the data are suitable for comparison to the NAAQS. Table 11 shows that no exceedances or violations of the NO<sub>2</sub> annual or 1-hour NAAQS were recorded at Maricopa County monitoring sites in 2023.

**Table 11 2023 NO<sub>2</sub> 1-hour Data Summary**

<b>Site Name</b>	<b>NO<sub>2</sub> Maximum (ppb)</b>	<b>NO<sub>2</sub> Annual Average (ppb)</b>	<b>NO<sub>2</sub> 98<sup>th</sup> Percentile (ppb)</b>	<b>NO<sub>2</sub> 3-Year 98<sup>th</sup> Percentiles Average (ppb)</b>
Buckeye	36.0	7.88	33.0	33.0
Central Phoenix	64.0	14.12	55.0	53.3
Eastwood	58.0	14.37	47.0	48.7
Thirty-Third	67.0	24.07	58.0	59.3
West Phoenix	60.0	14.43	52.0	48.7

Source: EPA AQS database 2021 – 2023 Quicklook Criteria Report (AMP450)

Additional information required by EPA for the near-road NO<sub>2</sub> monitors is shown in Table 12.

**Table 12 2023 NO<sub>2</sub> Monitor Requirements**

<b>CBSA</b>	<b>Population Estimate (2023)</b>	<b>Max AADT Count (2021)</b>	<b>Required Near-Road Monitors</b>	<b>Active Near-Road Monitors</b>	<b>Needed Near-Road Monitors</b>	<b>Required Area-Wide Monitors</b>	<b>Active Area-Wide Monitors</b>	<b>Needed Area-Wide Monitors</b>
38060	4,585,871	295,833	2	2	0	1	3	0

Sources: [U.S. Census Bureau: Quick Facts Population Estimate for Maricopa County](#); [Traffic Monitoring – ADOT Annual Average Daily Traffic Count](#)

## Ozone (O<sub>3</sub>)

Figure 7 shows the seventeen SLAMS O<sub>3</sub> monitors which operated in 2023. The data were reported to AQS, and data are suitable for comparison to the NAAQS.

In 2023, there were fifty days when at least one O<sub>3</sub> monitor exceeded the 2015 8-hour NAAQS of 70 ppb. When the 2008 8-hour O<sub>3</sub> NAAQS of 75 ppb is applied to the 2023 data, twenty-two days were observed where at least one O<sub>3</sub> monitor exceeded the standard.

An O<sub>3</sub> site is determined to have exceeded a NAAQS when the annual 4<sup>th</sup> highest daily maximum 8-hour concentration, averaged over the previous 3 years is greater than the daily 8-hour average NAAQS. Fifteen O<sub>3</sub> sites exceeded the 2015 NAAQS of 70 ppb and nine of those O<sub>3</sub> sites exceeded the 2008 NAAQS of 75 ppb.

As a result of documented Wildfires in 2023, MCAQD is submitting Exceptional Event (EE) packages for 39 of the 51 exceedance days noted. Per the EPA's Exceptional Event Rule, an EE is an uncontrollable event that was caused by natural sources of pollution or an event that is not expected to recur at a given location. If EPA Region 9 concurs, the PM<sub>10</sub> concentrations measured during the EE are not used to determine compliance with the NAAQS. If these and previous year's EEs are accepted by the EPA, nine O<sub>3</sub> sites will have exceeded the 2015 NAAQS of 70 ppb and zero sites will have exceeded the 2008 NAAQS of 75 ppb. The EE counts shown below on Table 13 are what have been submitted to the EPA for review as of this review's publishing.

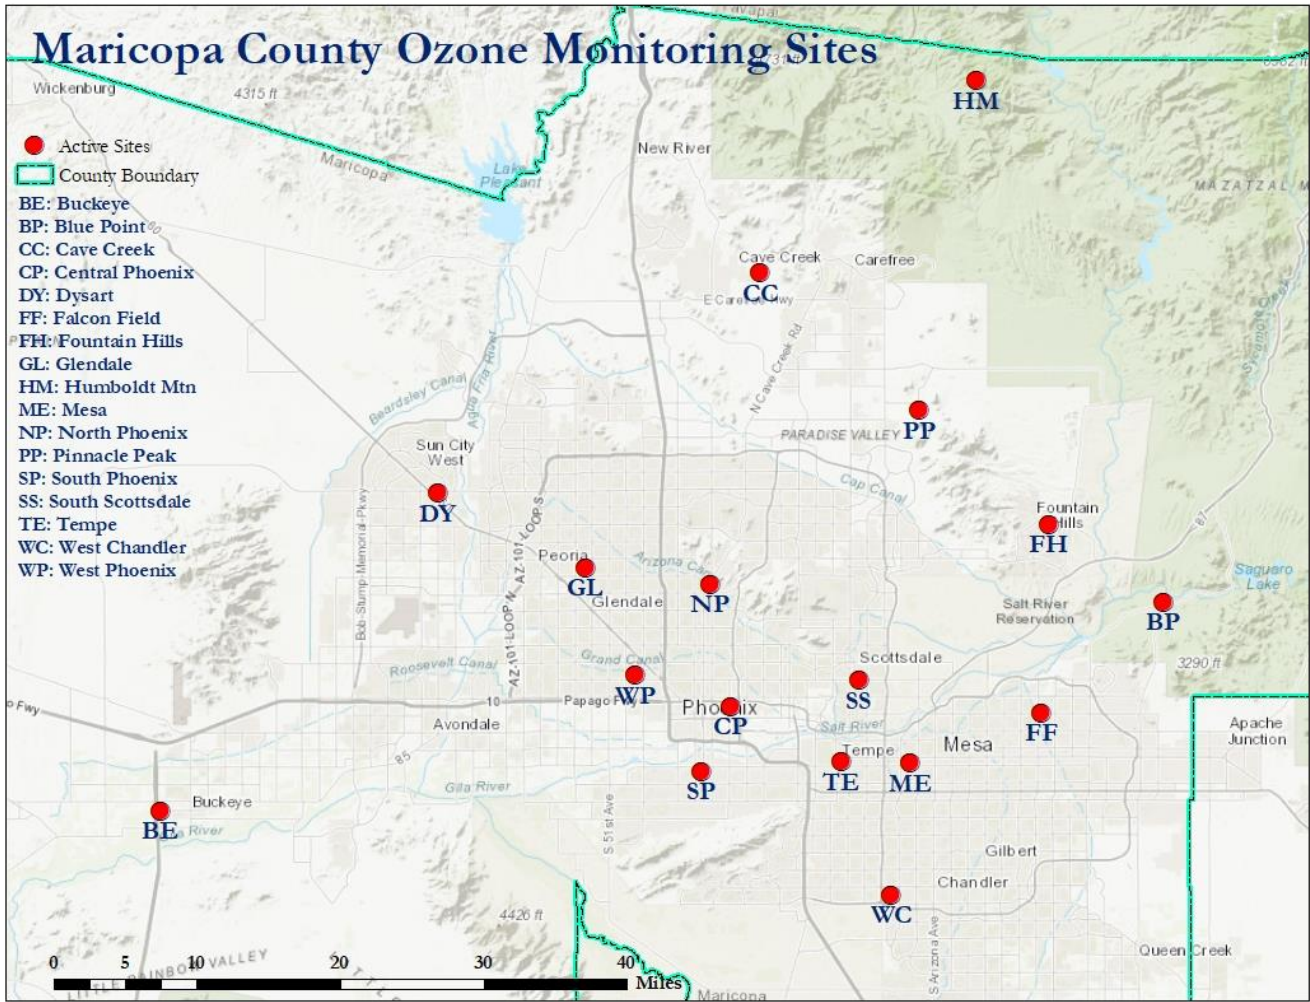


Figure 7 2023 O<sub>3</sub> Monitoring Sites

**Table 13 2023 O3 Eight-hour Average Summary**

<b>Site</b>	<b>1<sup>st</sup> 8-hr Maximum (ppm)</b>	<b>2<sup>nd</sup> 8-hr Maximum (ppm)</b>	<b>3<sup>rd</sup> 8-hr Maximum (ppm)</b>	<b>4<sup>th</sup> 8-hr Maximum (ppm)</b>	<b>Qty. of Days &gt; 0.070 ppm</b>	<b>Quantity of EEs</b>
Blue Point	0.085†	0.081†	0.080†	0.080†	17	13
Buckeye	0.070	0.070	0.067	0.067	0	0
Cave Creek	0.080†	0.080†	0.077†	0.076†	15	11
Central Phoenix	0.080†	0.080†	0.079†	0.078†	13	13
Dysart	0.076†	0.074†	0.074†	0.074†	12	12
Falcon Field	0.090†	0.086†	0.083†	0.080†	27	23
Fountain Hills	0.081†	0.075†	0.071†	0.070	3	3
Glendale	0.083†	0.081†	0.080†	0.079†	27	24
Humboldt Mt.	0.077†	0.075†	0.073†	0.073†	7	5
Mesa	0.085†	0.084†	0.082†	0.080†	22	18
North Phoenix	0.085†	0.084†	0.079†	0.077†	15	14
Pinnacle Peak	0.083†	0.077†	0.077†	0.076†	18	11
South Phoenix	0.078†	0.078†	0.076†	0.076†	10	11
South Scottsdale	0.077†	0.076†	0.075†	0.074†	7	6
Tempe	0.087†	0.084†	0.080†	0.080†	18	15
West Chandler	0.075†	0.071†	0.070	0.069	2	2
West Phoenix	0.087†	0.083†	0.079†	0.077†	20	18

† - Indicates an exceedance of the 2015 8-hr NAAQS

Source: EPA AQS 2023 Quicklook Criteria Report (AMP450); MCAQD 2023 O<sub>3</sub> Exceedance Day Report

**Table 14 2023 O3 Monitor Requirements**

CBSA		38060	
County		Maricopa	
Population Estimate (2023)		4,585,871	
3-Year Design Value		80 ppb	80 ppb
3-Year Design Value Site(s)	AQS ID	04-013-1004	04-013-1003
	Site Name	North Phoenix	Mesa
	Monitoring Organization	MCAQD	MCAQD
MCAQD 8-Hour Maximum Concentration		90 ppb	
MCAQD 8-Hour Maximum Concentration Site(s)	AQS ID	04-013-1003	
	Site Name	Mesa	
MSA Maximum 8-Hour Concentration		90 ppb	
MSA Maximum Concentration Site(s)	AQS ID	04-013-1003	
	Site Name	Mesa	
	Monitoring Organization	MCAQD	
Required Monitors		3	
Active Monitors		17	
Additional Monitors Needed		0	

Source: EPA AQS 2023 Preliminary Design Value Report (AMP480); EPA AQS 2023 Quicklook Criteria Report (AMP450); [U.S. Census Bureau: Quick Facts Population Estimate for Maricopa County](#)

## Particulate Matter $\leq 10$ Micrometers (PM<sub>10</sub>)

Figure 8 shows the fifteen PM<sub>10</sub> SLAMS monitors, which operated in 2023. All PM<sub>10</sub> monitoring stations operate continuous PM<sub>10</sub> analyzers that collect 5-minute and hourly averaged data. All data were submitted to AQS and are suitable for comparison to the NAAQS. The EPA does not require PM<sub>10</sub> analyzers to be collocated at the PQA0 level or the national level.

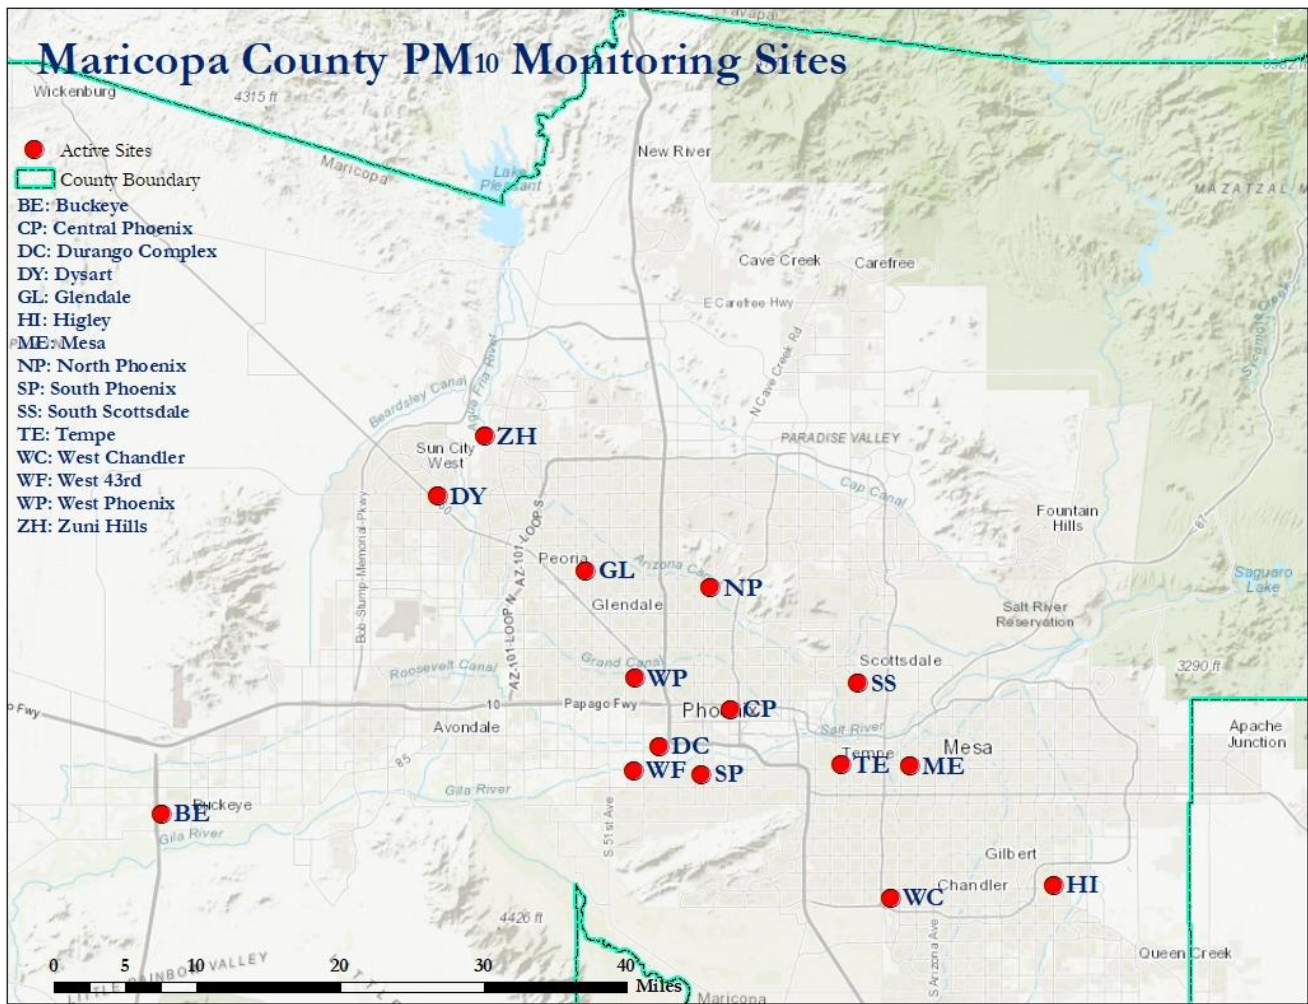


Figure 8 2023 PM<sub>10</sub> Monitoring Sites

A PM<sub>10</sub> exceedance day is defined to be a day in which the 24-hour PM<sub>10</sub> average is in excess of 155 µg/m<sup>3</sup>. The PM<sub>10</sub> NAAQS are violated when the expected number of exceedances at a monitor is more than one per year on average over the previous three years. The expected number of exceedances for a site is estimated using a formula provided in [40 CFR Part 50 Appendix K](#). The formula uses the number of days sampling occurs and the number of valid samples that can be collected. A 3-year average of these estimated days is then used to determine compliance. The annual weighted average for each PM<sub>10</sub> monitoring site is displayed on Table 14 for informational purposes.

In recent years, some PM<sub>10</sub> exceedances occurring in the Maricopa County CBSA have been successfully attributed to an Exceptional Event (EE). Per the EPA's Exceptional Event Rule, an EE is an uncontrollable event that was caused by natural sources of pollution or an event that is not expected to recur at a given location. ADEQ makes the determination of which events to classify as exceptional, then they submit documentation to EPA supporting the contention that the exceedance(s) was due to an EE. If EPA Region 9 concurs, the PM<sub>10</sub> concentrations measured during the EE are not used to determine compliance with the NAAQS. The EE counts shown below on Table 14 are current as of this review's publishing. In 2023, there were five days that exceeded the 24-hour PM<sub>10</sub> NAAQS at at least one of MCAQD's sites, and four sites Dysart, Higley, West 43rd, and West Chandler violated the NAAQS. Table 15 shows the PM<sub>10</sub> 24-hour NAAQS status and data summary, including EE data values. Table 15 2023 PM<sub>10</sub> 24-Hour Data Summary Including EE Data

**Table 15 2023 PM10 24-Hour Average Summary**

Site Name	Maximum 24-Hour Average (mg/m <sup>3</sup> )	2 <sup>nd</sup> Maximum 24-Hour Average (mg/m <sup>3</sup> )	Number of 24-hour NAAQS Exceedances	Three-year Average Annual Expected Exceedance Rate	Annual Weighted Average (mg/m <sup>3</sup> )	Quantity of EEs
Buckeye	181†‡	146	1	1	46.2	1
Central Phoenix	207†‡	151	1	0.7	34.6	1
Durango Complex	319†‡	112	1	0.7	37.1	1
Dysart	194†‡	140	1	1.7†	27.3	1
Glendale	119	113	0	0.3	20.6	0
Higley	165†‡	143	1	1.4†	32.1	1
Mesa	112	85	0	0.7	19.2	0
North Phoenix	110	100	0	0	18.9	0
South Phoenix	107	102	0	0	31.8	0
South Scottsdale	148	136	0	0.7	27.7	0
Tempe	97	89	0	0.7	23.0	0
West Chandler	152	146	0	1.7†	32.9	0
West 43 <sup>rd</sup> Avenue	216†‡	199†‡	3	3.7†	58.6	3
West Phoenix	182†‡	109	1	0.7	28.4	1
Zuni Hills	146	129	0	0.7	26.1	0

† - Indicates an exceedance of the standard

‡ - Data are associated with exceptional event flag

Source: EPA AQS 2023 Preliminary Design Value Report (AMP480); EPA AQS 2023 Quicklook Criteria Report (AMP450)

**Table 16 2023 PM<sub>10</sub> Monitor Requirements**

CBSA		38060
County		Maricopa
Population Estimate (2023)		4,585,871
MCAQD Maximum 24-Hour Concentration		319 µg/m <sup>3</sup>
MCAQD Maximum Concentration for Site	AQS ID	04-013-9812
	Site Name	Durango Complex
MSA Maximum 24-Hour Concentration		319 µg/m <sup>3</sup>
MSA Maximum Concentration Site	AQS ID	04-013-9812
	Site Name	Durango Complex
	Monitoring Organization	MCAQD
Required Monitors		6-10
Active Monitors		15
Additional Monitors Needed		0

Source: EPA AQS 2023 Quicklook Criteria Report (AMP450); [U.S. Census Bureau: Quick Facts Population Estimate for Maricopa County](#)

# Particulate Matter $\leq 2.5$ Micrometers (PM<sub>2.5</sub>)

Figure 9 shows the eight PM<sub>2.5</sub> sites which operated in 2023. All PM<sub>2.5</sub> monitors are designated as SLAMS. Data were reported to AQS, and data are suitable for comparison to the NAAQS.

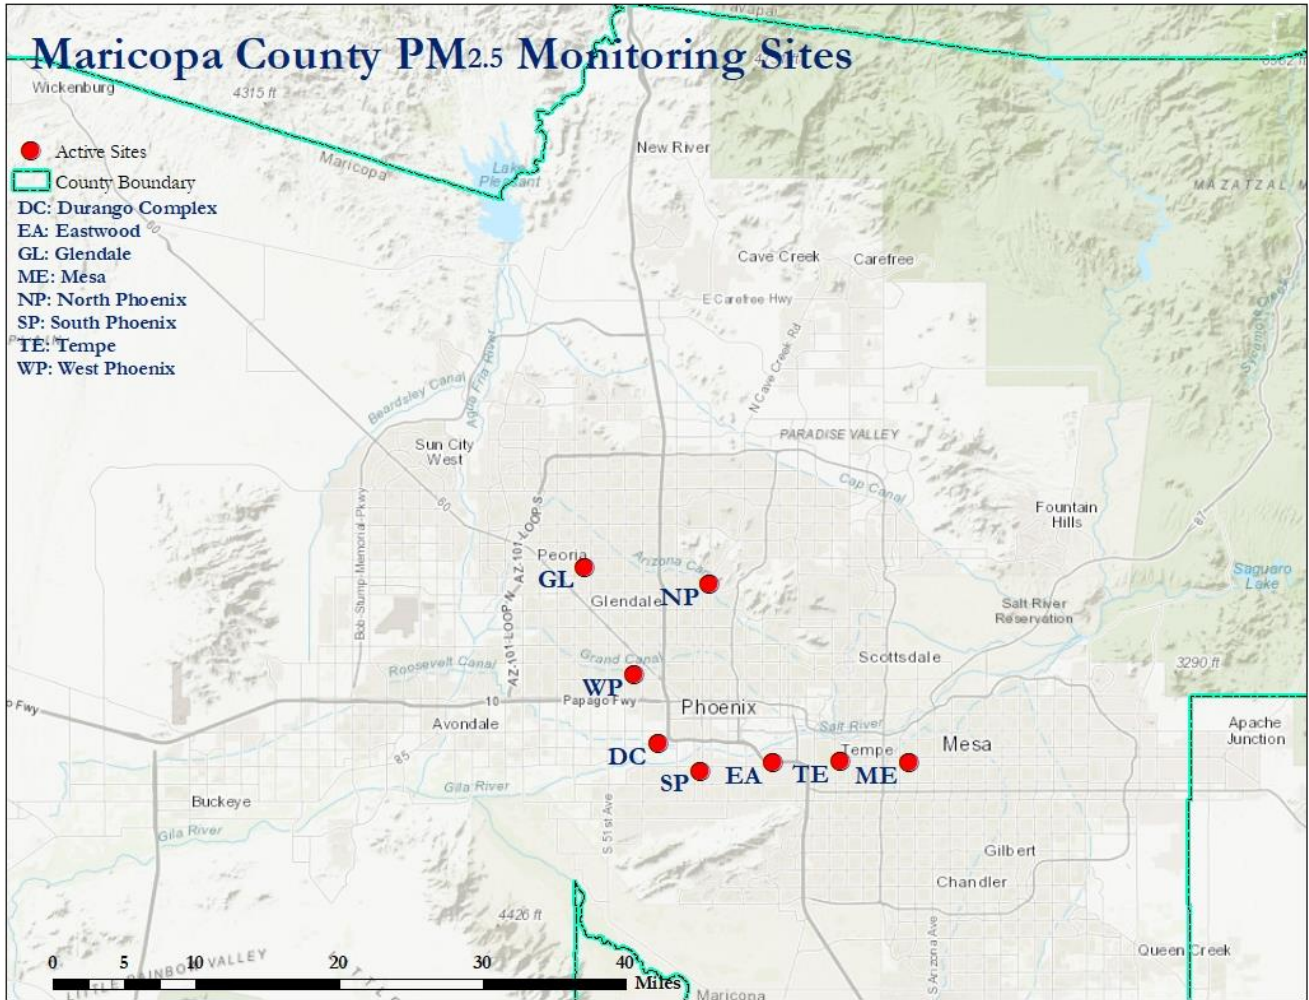


Figure 9 2023 PM<sub>2.5</sub> Monitoring Sites

Each PM<sub>2.5</sub> site operates a continuous FEM monitor that provides hourly concentration data used for NAAQS comparison. To meet the EPA’s QA collocation requirements for the PM<sub>2.5</sub> network, a secondary monitor is operated at the West Phoenix site. This site operates one FEM continuous analyzer designated as the primary monitor and one FRM filter-based PM<sub>2.5</sub> sampler designated as the secondary monitor. The FRM filter-based secondary sampler collects a 24-hour filter sample for QA purposes every 12 days. The U.S. EPA OAQPS produces the [annual sampling calendar](#) each year and posts it on the AMTIC website, this calendar is used for determining the days on which samples are picked up from the site.

Maricopa County is currently in attainment for PM<sub>2.5</sub>. MCAQD continually assesses the existing PM<sub>2.5</sub> network to ensure it adequately represents air quality in Maricopa County. monitor.

In the event MCAQD needed to move or change a violating PM<sub>2.5</sub> monitor, this procedure would be followed. MCAQD would hold a public hearing regarding the requested change. Details and documentation of the requested change, as well as all public comments, would then be forwarded to the EPA Region 9 for approval. Any action on MCAQD's part will be dependent on EPA Region 9 approval. Please note that this statement is general in nature and required in this AMNP by 40 CFR Part 58. MCAQD does not currently have any violating PM<sub>2.5</sub> monitors, nor does it have any proposals to move any PM<sub>2.5</sub> monitors.

In 2023, there were five days that exceeded the 24-hour PM<sub>2.5</sub> NAAQS of 35 µg/m<sup>3</sup> at one or more MCAQD sites. Table 17 summarizes the 24-hour and annual data from the primary monitors only, including EE data values.

**Table 17 2023 PM<sub>2.5</sub> 24-Hour and Annual Averages**

<b>Site Name</b>	<b>Maximum 24-Hour Average Concentration (µg/m<sup>3</sup>)</b>	<b>2<sup>nd</sup> Maximum 24-Hour Average Concentration (µg/m<sup>3</sup>)</b>	<b>98<sup>th</sup> Percentile 24-Hour Average Concentration (µg/m<sup>3</sup>)</b>	<b>Annual Average Concentration (µg/m<sup>3</sup>)</b>
Durango Complex	71.0†	37.0†	31.7	9.75
Eastwood	32.4	27.4	16.1	7.56
Glendale	66.9†	36.6†	22.9	6.99
Mesa	32.1	26.8	14.8	6.54
North Phoenix	55.3†	45.3†	17.6	6.97
South Phoenix	87.2†	76.4†	26.0	9.29
Tempe	37.6†	29.8	16.1	7.20
West Phoenix	95.2†	68.4†	31.7	9.5

† - Indicates an exceedance of the standard.

‡ - Data are associated with exceptional event flag

Source: EPA AQS 2023 Quicklook Criteria Report (AMP450)

Compliance with the primary and secondary annual NAAQS is determined by averaging three consecutive years of a site’s annual mean value using the 24-hour, or daily, concentrations. The annual PM<sub>2.5</sub> NAAQS is met when the 3-year annual average concentration is less than or equal to 12.0 µg/m<sup>3</sup> at a monitoring site. All 3-year averages were below the PM<sub>2.5</sub> annual NAAQS of 12µg/m<sup>3</sup> therefore MCAQD does not have any monitors in exceedance of the standard. Table 18 summarizes the 3-year annual average data.

**Table 18 PM<sub>2.5</sub> 3-Year Annual Averages**

<b>Site Name</b>	<b>2021 Annual Average Concentration (µg/m<sup>3</sup>)</b>	<b>2022 Annual Average Concentration (µg/m<sup>3</sup>)</b>	<b>2023 Annual Average Concentration (µg/m<sup>3</sup>)</b>	<b>3-Year Annual Average Concentration (µg/m<sup>3</sup>)</b>
Durango Complex	10.23	9.75	9.75	9.91
Eastwood	7.48*	7.88	7.56	7.64
Glendale	6.99	6.17	6.99	6.72
Mesa	6.79	6.30	6.54	6.54
North Phoenix	7.29	6.95	6.97	7.07
South Phoenix	9.62	11.09	9.29	10.00
Tempe	7.59	7.81	7.20	7.53
West Phoenix	10.72	10.20	9.5	10.14

\* - Indicates that the mean does not satisfy summary criteria, e.g., data completeness

Source: EPA AQS 2023 Quicklook Criteria Report (AMP450)

Compliance with the primary and secondary 24-hour PM<sub>2.5</sub> NAAQS is determined by averaging 3 consecutive years of the 24-hour 98<sup>th</sup> percentile concentration values from all eligible sites. The 24-hour NAAQS is met when the 3-year average concentration value is less than or equal to 35 µg/m<sup>3</sup>. In 2023, there were seven exceedance days, but no violations of the primary or secondary 24-hour NAAQS occurred. Table 19 summarizes the 3-year 24-hour 98<sup>th</sup> percentile data from the FEM analyzers.

**Table 19 PM<sub>2.5</sub> 3-Year 24-Hour Averages of the 98th Percentile**

<b>Site Name</b>	<b>2021 98<sup>th</sup> Percentile 24-Hour Average Concentration</b> <b>(µg/m<sup>3</sup>)</b>	<b>2022 98<sup>th</sup> Percentile 24-Hour Average Concentration</b> <b>(µg/m<sup>3</sup>)</b>	<b>2023 98<sup>th</sup> Percentile 24-Hour Average Concentration</b> <b>(µg/m<sup>3</sup>)</b>	<b>3-Year 98<sup>th</sup> Percentile 24-Hour Average Concentration</b> <b>(µg/m<sup>3</sup>)</b>
Durango Complex	27.2	28.0	31.7	29.0
Eastwood	16.2*	17.7	16.1	16.7
Glendale	17.8	19.1	22.9	19.9
Mesa	18.1	16.7	14.8	16.5
North Phoenix	16.2	21.5	17.6	18.4
South Phoenix	30.5	29.5	26.0	28.7
Tempe	21.9	17.1	16.1	18.4
West Phoenix	26.0	33.0	31.7	30.2

\* - Indicates that the mean does not satisfy summary criteria, e.g., data completeness

Source: EPA AQS 2023 Quicklook Criteria Report (AMP450)

Table 20 shows additional information required by EPA. The PM<sub>2.5</sub> annual and daily design values include any measurements submitted as an EE for EPA’s concurrence. 2023 PM<sub>2.5</sub> EE documentation is being compiled by MCAQD as of the time this report was published.

**Table 20 2023 PM<sub>2.5</sub> Data Required by EPA**

CBSA		38060
County		Maricopa
Population Estimate (2022)		4,585,871
MCAQD Annual Design Value		10.1 µg/m <sup>3</sup>
MCAQD Annual Design Value Site	AQS ID	04-013-0019
	Site Name	West Phoenix
MCAQD 24-Hour Design Value		30 µg/m <sup>3</sup>
MCAQD 24-Hour Design Value Sites	AQS ID	04-013-0019
	Site Name	West Phoenix
MCAQD Max 24-Hour Concentration		95.2 µg/m <sup>3</sup>
MCAQD Max 24-Hour Concentration Site	AQS ID	04-013-0019
	Site Name	West Phoenix
MSA Max 24-Hour Concentration		95.2 µg/m <sup>3</sup>
MSA Max 24-Hour Concentration Site	AQS ID	04-013-0019
	Site Name	West Phoenix
	Monitoring Organization	MCAQD
Required Monitors		3
Active Monitors		8
Additional Monitors Needed		0

Source: EPA AQS 2023 Preliminary Design Value Report (AMP480); EPA AQS 2023 Quicklook Criteria Report (AMP450); [U.S. Census Bureau: Quick Facts Population Estimate for Maricopa County](#)

# Sulfur Dioxide (SO<sub>2</sub>)

Figure 10 shows the two SO<sub>2</sub> SLAMS monitors which operated in 2023. The data were reported to AQS, and the data are suitable for NAAQS comparison.

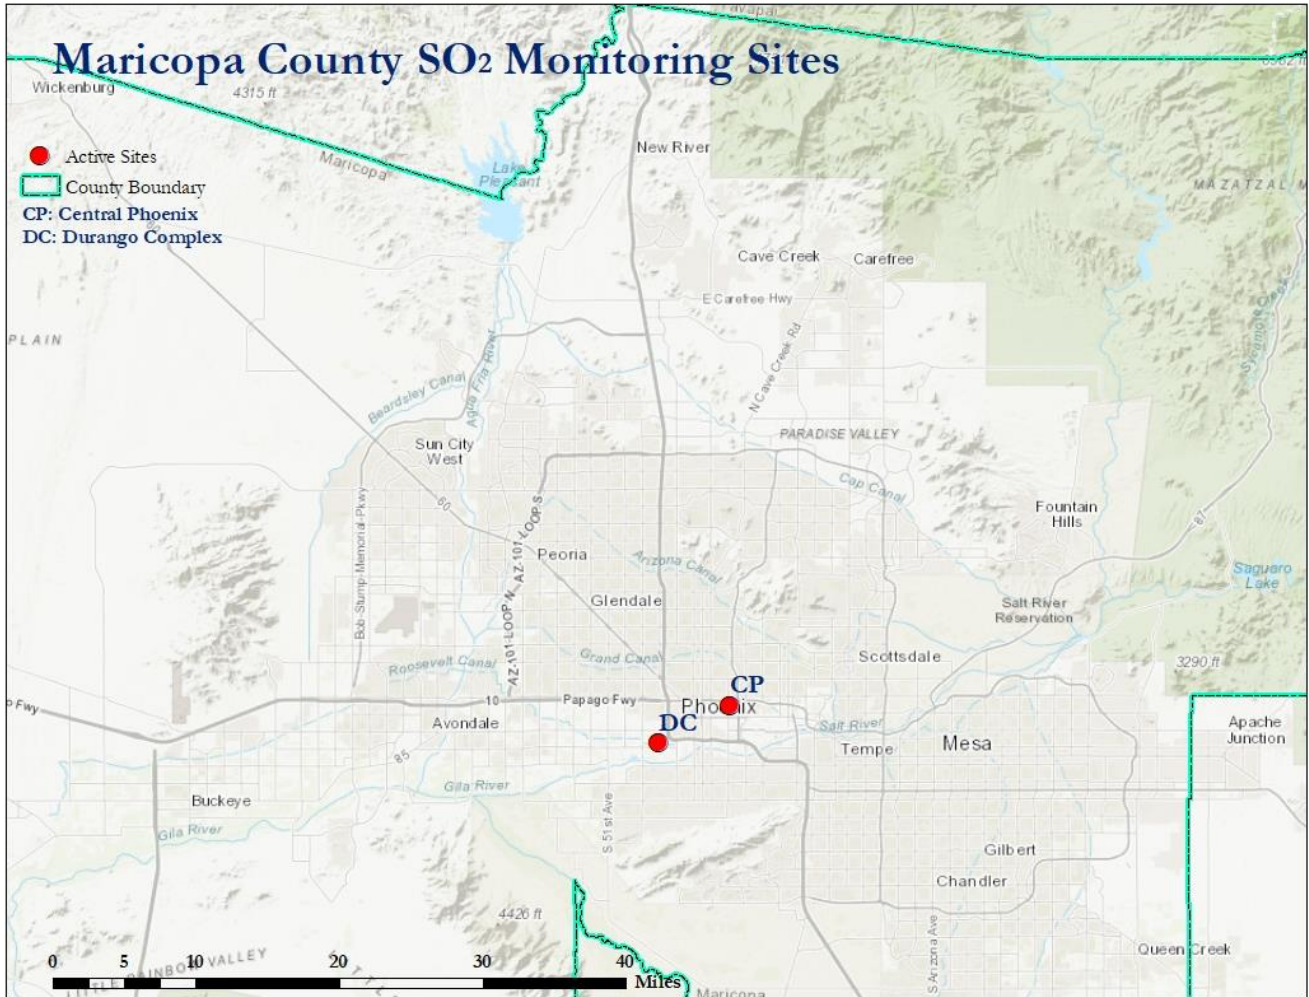


Figure 10 2023 SO<sub>2</sub> Monitoring Sites

Sulfur dioxide has a 1-hour primary standard and a 3-hour secondary standard. In 2023, no exceedances of the SO<sub>2</sub> primary 1-hour or secondary 3-hour standard were recorded at Maricopa County monitoring sites; and no site violated the SO<sub>2</sub> NAAQS. The EPA requires that the highest 5-minute average per hour per day be reported to AQS; however, there is no 5-minute SO<sub>2</sub> NAAQS standard.

**Table 21 2023 SO<sub>2</sub> Data Summary**

<b>Site</b>	<b>1-hour Maximum Concentration (ppb)</b>	<b>1-hour 2<sup>nd</sup> Maximum Concentration (ppb)</b>	<b>1-hour 99<sup>th</sup> Percentile (ppb)</b>
Central Phoenix	50.0	5.0	4.0
Durango Complex	4.0	4.0	4.0

Source: EPA AQS 2023 Quicklook Criteria Report (AMP450)

The minimum required quantity of SO<sub>2</sub> monitors operating within the MCAQD’s network is based on either the Population Weighted Emissions Index (PWEI) and/or the EPA R9 Administrator’s input (see 40 CFR Part 58 - Appendix D 4.4.3).

**Table 22 2023 SO<sub>2</sub> Monitor Requirements**

<b>CBSA</b>	<b>County</b>	<b>Population Estimate (2022)</b>	<b>Total SO<sub>2</sub> Emitted (2020) (tpy)</b>	<b>Population Weighted Emission Index (million persons-tons/yr)</b>	<b>Required Monitors</b>	<b>Active Monitors</b>	<b>Additional Monitors Needed</b>
38060	Maricopa	4,585,871	1167	5351	1	2	0

Source: [The EPA’s National Emissions Inventories \(NEI\) database – 2022 NEI Data](#)  
[U.S. Census Bureau: Quick Facts Population Estimate for Maricopa County](#)

## Summary of 2023 Criteria Pollutant NAAQS Status

This section summarizes information regarding the status of each pollutant relative to its NAAQS level. It also provides detailed information regarding pollutants that are in NAAQS violation. Table 23 summarizes the 2023 NAAQS exceedances and violations by pollutant.

**Table 23 2023 NAAQS Exceedances and Violation Summary**

Pollutant	NAAQS Status
O <sub>3</sub>	<ul style="list-style-type: none"> <li>• On fifty (50) unique days, at least one monitor exceeded the 2015 8-hour primary/secondary NAAQS unless EPA Region 9 concurs with the EE demonstration submittals.</li> <li>• On twenty-two (22) days, at least one monitor exceeded the 2008 8-hour primary/secondary NAAQS.</li> <li>• Fifteen (15) sites will violate the 2015 8-hour primary/secondary NAAQS unless EPA Region 9 concurs with the EE demonstration submittals.</li> </ul>
PM <sub>10</sub>	<ul style="list-style-type: none"> <li>• On five (5) unique days, at least one monitor exceeded the 24-hour primary/secondary 1987 NAAQS.</li> <li>• Four (4) sites will violate the primary/secondary 1987 NAAQS unless EPA Region 9 concurs with the EE demonstration submittals. If submittals are approved, then no site will violate the NAAQS.</li> </ul>
PM <sub>2.5</sub>	<ul style="list-style-type: none"> <li>• On five (5) unique days, at least one monitor exceeded the 2012 24-hour primary/secondary NAAQS.</li> <li>• No sites violated the 24-hour or annual primary/secondary 2012 NAAQS.</li> </ul>
SO <sub>2</sub>	<ul style="list-style-type: none"> <li>• No exceedances or violations of the primary annual or 1-hour 2010 NAAQS or the annual secondary 2010 NAAQS occurred.</li> </ul>
NO <sub>2</sub>	<ul style="list-style-type: none"> <li>• No exceedances or violations of the 1-hour or annual primary 2010 NAAQS or annual secondary 2012 NAAQS occurred.</li> </ul>
CO	<ul style="list-style-type: none"> <li>• No exceedances or violations of the 1-hour or 8-hour primary 2011 NAAQS occurred.</li> </ul>

## **2023 O<sub>3</sub> Exceedance, Violation, and Exceptional Event Information**

This section discusses the monitoring results of the O<sub>3</sub> network, and the 2015 NAAQS violation status based upon years 2021 through 2023.

### **O<sub>3</sub> NAAQS Exceedances**

The 2015 O<sub>3</sub> NAAQS level of 0.070 ppm is exceeded when a rolling 8-hour average is 0.071 ppm or higher. Fifty exceedance days occurred in 2023. Figure 11 shows the 2023 O<sub>3</sub> exceedance dates and concentrations by site. Exceedance day values associated with an EE are shown in red.

The 2008 O<sub>3</sub> NAAQS level of 0.075 ppm is exceeded when a rolling 8-hour average is 0.076 ppm or higher. Twenty-two exceedances of the 2008 standard occurred in 2023.

### **O<sub>3</sub> Exceptional Events and Status of EPA Concurrence**

Thirty-nine (39) exceedance days appear to be influenced by smoke from wildfires for which EE packages are being developed for submittal to EPA. The EPA must concur with the EE demonstration package before O<sub>3</sub> data can be omitted from NAAQS comparisons.

#### *O<sub>3</sub> NAAQS Violation Status - Including Exceptional Event Data*

A site violates the 2015 O<sub>3</sub> NAAQS when the 3-year average of the 4<sup>th</sup> highest rolling 8-hour average concentration measured each year exceeds 0.070 ppm. Figure 12 shows the sites that violated the 2015 O<sub>3</sub> NAAQS and includes 2021 through 2023 average data associated with EE submittals.

#### *O<sub>3</sub> NAAQS Violation Status - Excluding Exceptional Event Data*

Figure 13 shows the sites that would violate the 2015 O<sub>3</sub> NAAQS in 2023, if the EPA concurs with the EE demonstration packages submitted for 2021 through 2023. The graph also shows that only the Falcon Field site would violate the 2008 O<sub>3</sub> NAAQS if exceptional events are approved.

### 2023 Ozone Exceedance Days

2015 Ozone 8-Hr Avg. NAAQS > 0.070 ppm

2008 Ozone 8-Hr Avg. NAAQS > 0.075 ppm

Date	Buckeye	Blue Point	Cave Creek	Central Phoenix	Dysart	Falcon Field	Fountain Hills	Glendale	Humboldt Mt.	Mesa	North Phoenix	Pinnacle Peak	South Phoenix	South Scottsdale	Tempe	West Chandler	West Phoenix
04/16/23										0.072							
05/09/23												0.071					
05/11/23		0.072				0.072						0.072					
05/12/23		0.073	0.072			0.072				0.071		0.073					
05/14/23					0.073			0.074									
05/15/23					0.074			0.074									
05/16/23				0.072	0.076			0.078		0.072		0.071					0.072
05/17/23		0.081	0.073	0.078	0.074	0.086		0.081		0.082	0.072	0.076		0.074	0.076	0.071	0.077
05/20/23				0.072				0.074									0.075
05/21/23					0.074			0.076									
05/22/23			0.071														
06/01/23								0.074									
06/08/23		0.071	0.074					0.073		0.075		0.073					
06/09/23			0.077					0.072	0.075			0.073					
06/13/23						0.077				0.074				0.071			
06/14/23		0.075				0.073						0.072					
06/15/23			0.073									0.072					
06/17/23						0.073											
06/22/23			0.073	0.075				0.073			0.073	0.077	0.072		0.071		0.076
06/23/23		0.078				0.08				0.073							
06/24/23		0.074	0.080		0.074	0.076		0.075	0.077	0.075		0.075			0.073		0.071
06/25/23				0.074		0.079		0.072		0.078			0.074	0.072	0.080		0.075
06/26/23		0.080				0.08				0.071							
06/29/23			0.076						0.071								
06/30/23		0.077	0.075			0.079		0.073	0.071	0.076	0.072	0.075			0.073		
07/01/23			0.073		0.072			0.073		0.073					0.072		0.071
07/02/23						0.073											
07/03/23						0.073											
07/07/23				0.072							0.075	0.076	0.073		0.071		0.074
07/18/23						0.071											
07/21/23		0.071				0.074											
07/22/23										0.071							0.071
07/23/23			0.071					0.074									
07/24/23		0.072		0.080		0.079		0.071		0.08	0.077	0.073	0.072	0.077	0.084		0.076
07/25/23		0.071		0.072		0.078		0.071		0.079	0.075	0.071	0.071	0.071	0.077		0.075
07/26/23						0.072											
07/27/23		0.085	0.080	0.080		0.090	0.081	0.083	0.073	0.085	0.085	0.083	0.076	0.076	0.087		0.083
07/28/23						0.072											
07/29/23		0.075				0.074											
07/31/23		0.075	0.075	0.079	0.074	0.078	0.075	0.079	0.072	0.078	0.084	0.077	0.078	0.072	0.080		0.087
08/01/23		0.074	0.072			0.075		0.077		0.074	0.079	0.073			0.073		0.075
08/15/23					0.071			0.073									
08/16/23								0.071									
08/17/23		0.080		0.075	0.071	0.083	0.071	0.077		0.084	0.075	0.074	0.074	0.075	0.080	0.075	0.077
08/18/23				0.073	0.071	0.074		0.072		0.078	0.073	0.073	0.078		0.079		0.075
08/22/23						0.071					0.073						
08/24/23					0.071			0.080		0.071	0.075		0.071				0.079
08/25/23				0.072				0.078		0.076	0.075		0.076		0.078		0.075
08/28/23								0.074		0.072	0.074				0.073		0.075
08/29/23								0.071									
Exceedance Days	0	17	15	13	12	27	3	27	7	22	15	18	11	6	18	2	19
Maximum Value		0.085	0.080	0.080	0.076	0.090	0.081	0.083	0.077	0.085	0.085	0.083	0.078	0.077	0.087	0.075	0.087
4 <sup>th</sup> Highest Value >0.070	N/A	0.080	0.076	0.078	0.074	0.080	N/A	0.079	0.073	0.080	0.077	0.076	0.076	0.074	0.080	N/A	0.077

**NOTES:**

- - no data - monitor down

\*\* - value corrected since original report issued

Exceptional Event Designation

Please see ADEQ for information on additional statewide ozone sites

Total Number of Days where at least one monitor exceeded the NAAQS

50

Figure 11 Ozone Exceedance Days

### 2023 O<sub>3</sub> NAAQS Violations Including Exceptional Events

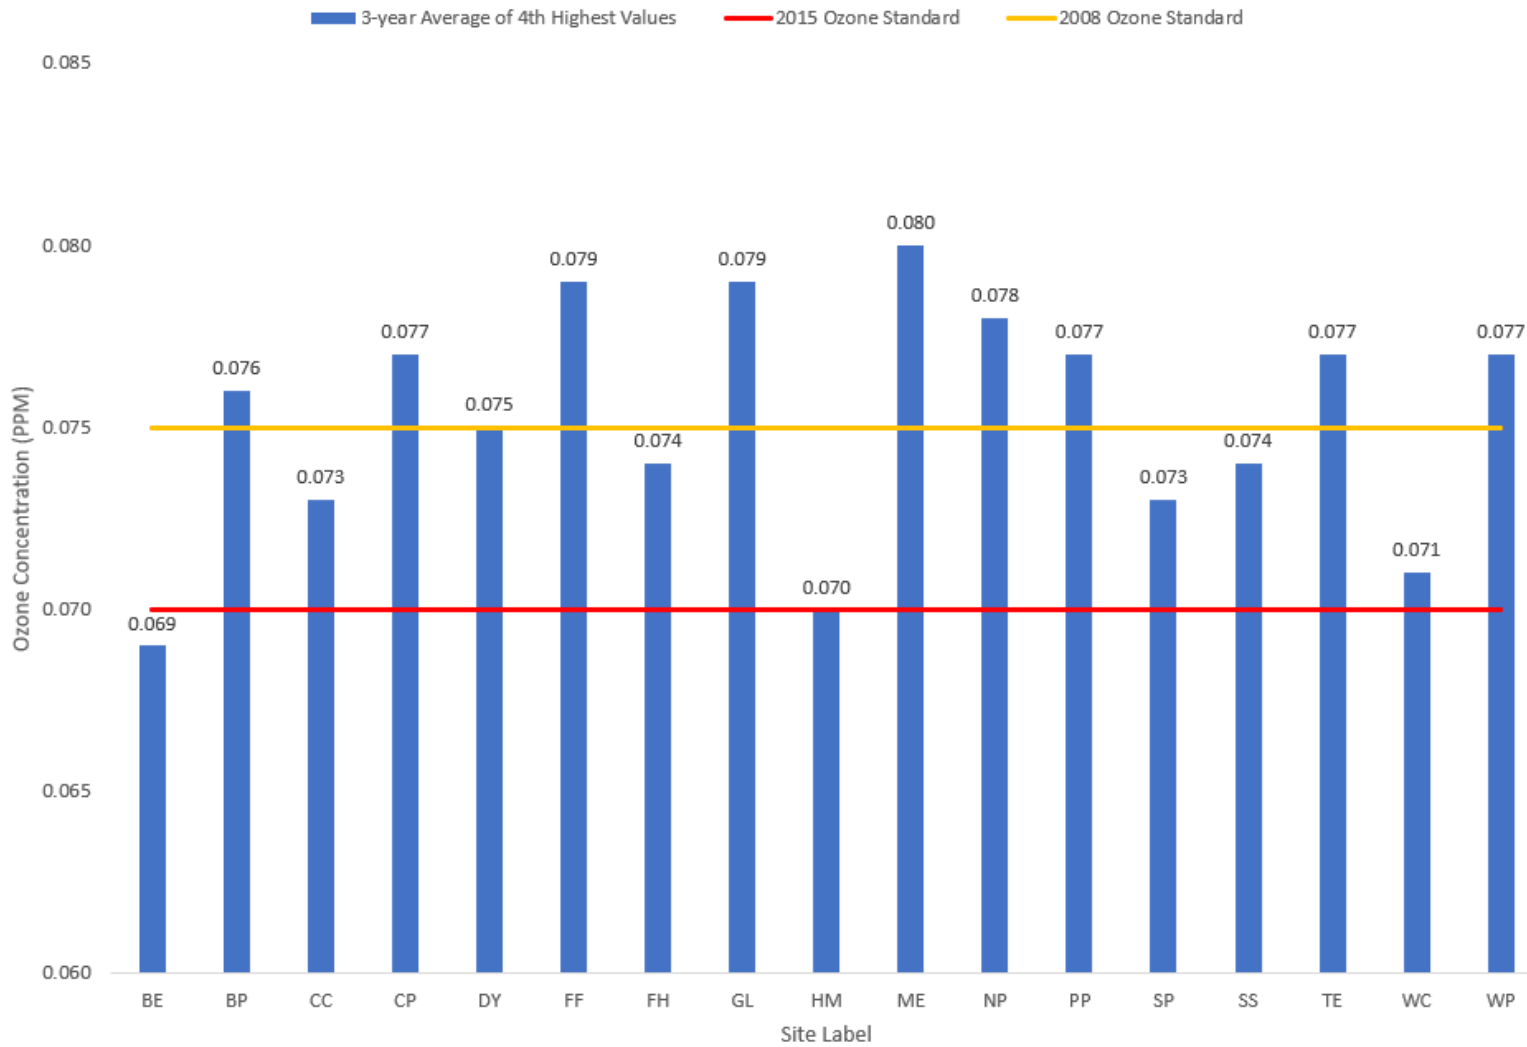
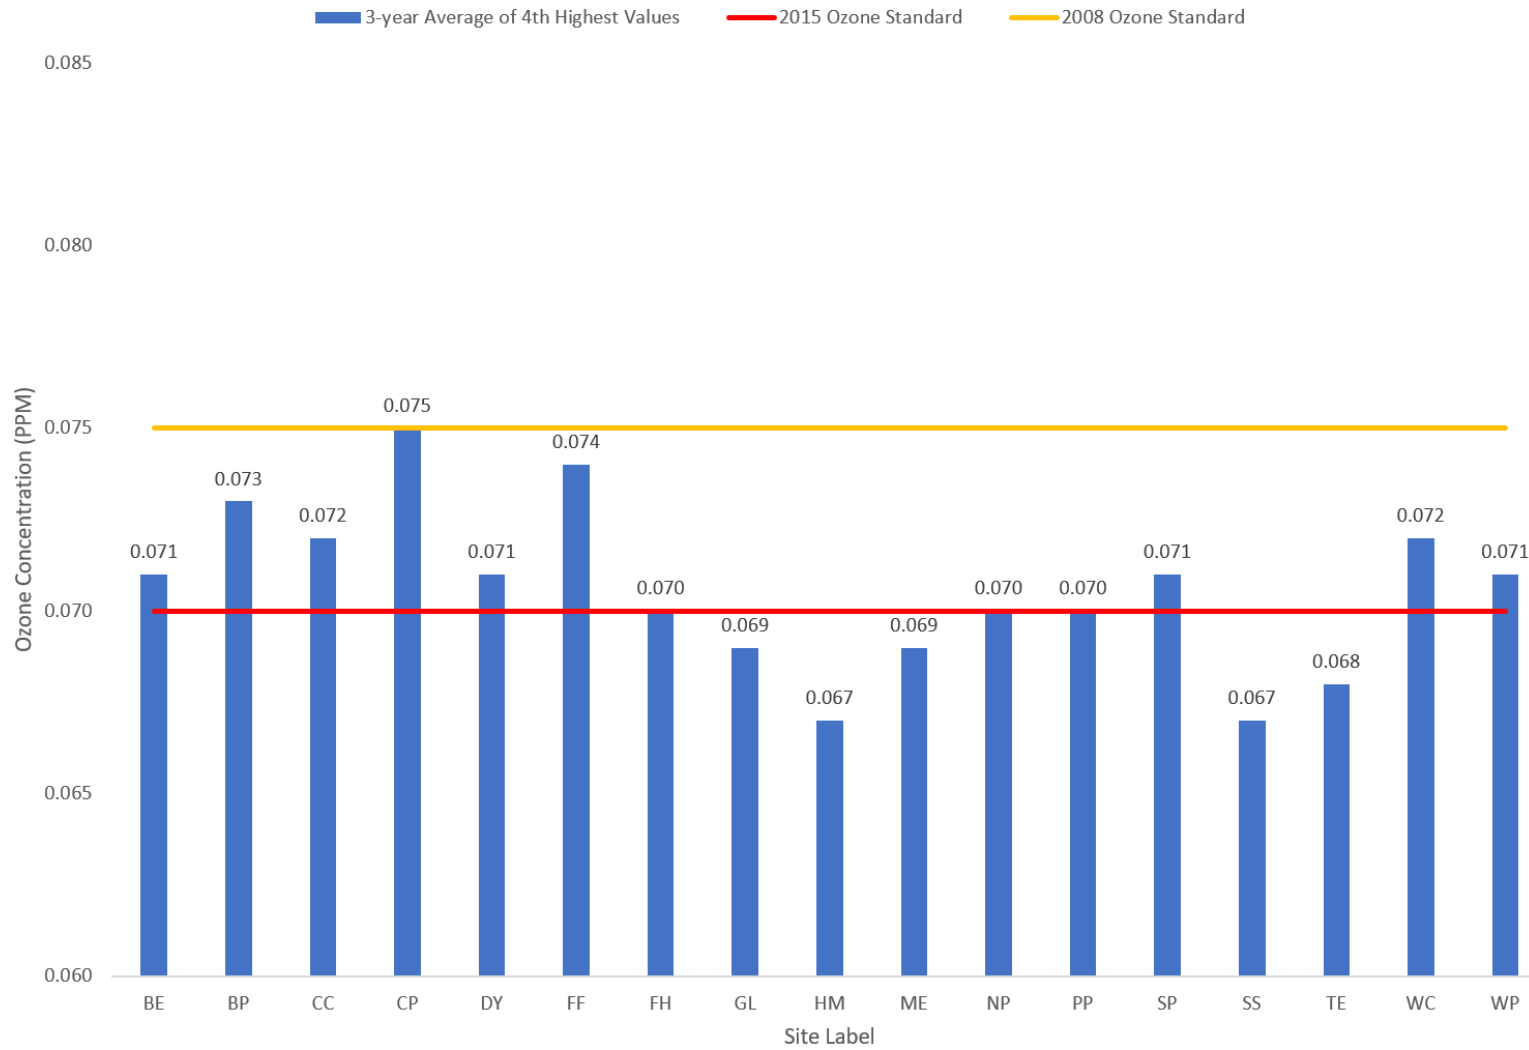


Figure 12 2023 O<sub>3</sub> NAAQS Violations by Site Including Exceptional Events

Source: EPA AQS 2023 O<sub>3</sub> 8-Hour Maximum Values Report (AMP440)

### 2023 O<sub>3</sub> NAAQS Violations Excluding Exceptional Events



**Figure 13 2023 O<sub>3</sub> NAAQS Violations by Site Excluding Exceptional Events**

Source: EPA AQS 2023 O<sub>3</sub> 8-Hour Maximum Values Report (AMP440)

## 2023 PM<sub>10</sub> Exceedance, Violation, and Exceptional Event Information

This section discusses the monitoring results of the PM<sub>10</sub> network and NAAQS violation status based upon years 2021 - 2023.

### PM<sub>10</sub> NAAQS Exceedances

A PM<sub>10</sub> exceedance occurs when a monitor’s 24-hour average concentration from midnight-to-midnight is 155.5 µg/m<sup>3</sup> or higher. Figure 14 shows the site and date of PM<sub>10</sub> exceedances that occurred in 2023. All 2023 exceedances of the PM<sub>10</sub> NAAQS qualify for Exceptional Events consideration and demonstration packages have been developed for EPA’s review. The 24-hour concentrations shown below include hourly PM<sub>10</sub> data flagged as an Exceptional Event in red.

**2023 Exceedance Days of the 24-Hr PM<sub>10</sub> NAAQS**

**PM<sub>10</sub> 24-Hr Avg. NAAQS ≥ 155 µg/m<sup>3</sup>**

	Buckeye	Central Phoenix	Durango Complex	Dysart	Glendale	Higley	Mesa	North Phoenix	South Phoenix	South Scottsdale	Tempe	West Chandler	West 43rd	West Phoenix	Zuni Hills
04/03/23	181.4												199.8		
07/21/23													216.9		
07/26/23						165.3									
08/31/23		207.0	319.2	194.7											182.4
10/01/23													160.8		
Exceedance Days	1	1	1	1	0	1	0	0	0	0	0	0	3	1	0
NOTE: Exceedances qualifying for an EE submittal to EPA are shown in RED															
Number of Days in 2023 when at least one monitor exceeded the 24-Hr PM <sub>10</sub> NAAQS															
5															

**Figure 14 2023 PM<sub>10</sub> Exceedance Days**

#### *PM<sub>10</sub> 24-Hour NAAQS Violation Status - Including Exceptional Event Data*

As per 40 CFR Part 50.6 (a), a site violates the primary and/or secondary 24-hour PM<sub>10</sub> NAAQS when the calculated “rate of expected exceedances” is greater than one (> 1) when averaged over three consecutive years. Table 24 includes EE data and shows the maximum three-year 24-hour PM<sub>10</sub> averages, the calculation of expected exceedances for each year, and the calculation of three-year average for the rate of expected exceedances. If the EPA does not concur with the EE demonstration packages submitted for years 2021 through 2023; then, three sites within the MCAQD network will violate the PM<sub>10</sub> NAAQS as shown in the 3-Year Average Rate of Expected Exceedances column.

Table 24 2023 Violations of the PM<sub>10</sub> 24-Hour NAAQS Including EE Data

Site	2021		2022		2023		3-Year Average Rate of Expected Exceedances
	24-Hour Maximum (µg/m <sup>3</sup> )	Expected Exceedances	24-Hour Maximum (µg/m <sup>3</sup> )	Expected Exceedances	24-Hour Maximum (µg/m <sup>3</sup> )	Expected Exceedances	
Buckeye	258‡	2	153	0	181‡	1	1
Central Phoenix	170‡	1	101	0	207‡	0	0.3
Durango Complex	163‡	1	98	0	319‡	1	0.7
Dysart	170‡	2	206‡	2	194‡	1	1.7†
Glendale	173‡	1	89	0	119	0	0.3
Higley	219‡	2.1	160‡	1	165‡	1.2	1.4†
Mesa	199‡	2.1	74	0	112	0	0.7
North Phoenix	143	0	68	0	110	0	0
South Phoenix	144	0	97	0	107	0	0
South Scottsdale	188‡	2	100	0	148	0	0.7
Tempe	208‡	2.1	73	0	97	0	0.7
West Chandler	181‡	3	191‡	2.1	152	0	1.7†
West 43rd	177‡	3	316‡	5.2	216‡	3	3.7†
West Phoenix	250†	1.1	127	0	182‡	1	0.7
Zuni Hills	248‡	1	167‡	1	146	0	0.7

‡ - MCAQD flagged this exceedance as an EE in AQS

† - indicates a violation of the NAAQS

Source: EPA AQS database 2021 - 2023 Quicklook Criteria Parameters Report (AMP450)

*PM<sub>10</sub> 24-Hour NAAQS Violation Status - Excluding Exceptional Event Data*

The ADEQ submits EE packages to EPA Region 9 for the 2023 PM<sub>10</sub> exceedance days. If EPA concurs with the EE demonstration packages submitted for 2021 through 2023, then no sites will violate the PM<sub>10</sub> NAAQS in 2023. Table 25 excludes PM<sub>10</sub> data considered the result of an EE, regardless of the EPA's concurrence status. The NAAQS violation status is shown in the 3-Year Average Rate of Expected Exceedances column.

**Table 25 2023 Violations of the PM<sub>10</sub> NAAQS Excluding Data Flagged as an EE**

Site	2021		2022		2023		3-Year Average Rate of Expected Exceedances
	24-hour Maximum (µg/m <sup>3</sup> )	Expected Exceedances	24-hour Maximum (µg/m <sup>3</sup> )	Expected Exceedances	24-hour Maximum (µg/m <sup>3</sup> )	Expected Exceedances	
Buckeye	149	0	153	0	146	0	0
Central Phoenix	125	0	101	0	151	0	0
Durango Complex	131	0	98	0	112	0	0
Dysart	137	0	136	0	140	0	0
Glendale	107	0	89	0	119	0	0
Higley	134	0	99	0	143	0	0
Mesa	170	0	74	0	112	0	0
North Phoenix	98	0	68	0	110	0	0
South Phoenix	92	0	97	0	107	0	0
South Scottsdale	103	0	100	0	148	0	0
Tempe	83	0	73	0	97	0	0
West Chandler	89	0	115	0	152	0	0
West 43rd Avenue	155	1	148	0	146	0	0
West Phoenix	141	0	127	0	109	0	0
Zuni Hills	122	0	126	0	146	0	0

Source: EPA AQS 2023 O<sub>3</sub> 8-Hour Maximum Values Report (AMP440)

## 2023 PM<sub>2.5</sub> Exceedance, Violation, and Exceptional Event Information

This section discusses the monitoring results of the PM<sub>2.5</sub> network in 2023. It includes NAAQS exceedance information and violation status for 2023.

### PM<sub>2.5</sub> Annual NAAQS Exceedance and Violation Status

The annual primary NAAQS for PM<sub>2.5</sub> is 12.0 µg/m<sup>3</sup> and the secondary NAAQS for PM<sub>2.5</sub> is 15.0 µg/m<sup>3</sup>. In 2023, there were no exceedances or violations of either annual NAAQS levels. Each site's annual PM<sub>2.5</sub> average was shown previously on Table 18.

### PM<sub>2.5</sub> 24-Hour NAAQS Exceedance and Violation Status

The 24-hour primary and secondary NAAQS levels for PM<sub>2.5</sub> are 35 µg/m<sup>3</sup>. If the 24-hour block-average concentration from midnight-to-midnight at a site is 35.5 µg/m<sup>3</sup> or higher, then it is counted as an exceedance. A summary of the 24-hour average data can be found in Table 17 and Figure 15 below. If the 24-hour 3-year average of the 98<sup>th</sup> percentile exceeds 35 µg/m<sup>3</sup>, then the 24-hour NAAQS is violated. The data presented in Table 19 shows no exceedances or violations of the 98<sup>th</sup> percentile average data.

2023 Exceedance Days of the 24-Hr PM <sub>2.5</sub> NAAQS								
PM <sub>2.5</sub> 24-Hr Avg. NAAQS ≥ 35.5 µg/m <sup>3</sup>								
	Durango Complex	Eastwood	Glendale	Mesa	North Phoenix	South Phoenix	Tempe	West Phoenix
01/01/2023			66.9		55.3		37.6	68.4
01/08/2023	37.0							
12/24/2023						51.2		47.3
12/25/2023	71.0		36.3		45.3	87.2		95.2
12/31/2023			36.6			76.4		50.9
Exceedance Days	2	0	3	0	2	3	1	4
* - monitor down								
		Number of Days in 2023 where at least one monitor exceeded the 24-Hr PM <sub>2.5</sub> NAAQS						5
NOTES:								
Exceedances qualifying for an EE submittal to EPA are shown in RED								

Figure 15 2023 PM<sub>2.5</sub> Exceedance Days

### PM<sub>2.5</sub> Exceptional Events and Status of EPA Concurrence

PM<sub>2.5</sub> exceptional event determinations are being compiled by as of the publication of this report on June 28, 2024. Concurrence was reached on all PM<sub>2.5</sub> AQS submitted data during the data certification process.

## **Shared Air Monitoring Responsibilities**

For the MCAQD monitoring network, EPA requested that we work with the other State/Local/Tribal MOs within the MSA/CBSA to develop a shared monitoring agreement as specified by EPA Region 9. This is to ensure that each pollutant's network is adequately represented throughout Maricopa and Pinal Counties, which is the MSA/CBSA geographical area. ADEQ has been designated to develop the agreements with counties that operate stations within the MSA/CBSA. As of May 2024, no agreement has been developed.

## **Information Regarding Additional Air Monitoring within Maricopa County**

ADEQ operates its own air monitoring surveillance system within the State of Arizona, which includes the JLG Supersite in central Phoenix. JLG Supersite is part of the national air monitoring surveillance system and numerous SLAMS monitors operate there. In addition, ADEQ collects research data for other air monitoring programs at both the JLG Supersite and MCAQD's South Phoenix site. The research data support EPA's air monitoring programs that include, but are not limited to, identifying airborne air toxics and ozone precursors, identifying the chemical composition of PM<sub>2.5</sub>, and measuring visual haze.

Specifically, ADEQ performs air monitoring in Maricopa County for the Chemical Speciation Network (CSN), the Interagency Monitoring of Protected Visual Environments (IMPROVE), the National Air Toxics Trends Stations (NATTS), the National Core multi-pollutant monitoring stations (NCORE), the Photochemical Assessment Monitoring Stations (PAMS), and the Urban Air Toxics Monitoring Program (UATMP). They also operate visibility cameras and meteorological monitors within the County. Occasionally, ADEQ may temporarily use other sites for special projects.

For more information about ADEQ's network, consult the [ADEQ Air Quality Division's website](#).


## REFERENCES

- The [eCFR Title 40, Parts 50, 53, and 58](#)
- U.S. EPA Office of Air and Radiation: <https://www.epa.gov/aboutepa/about-office-air-and-radiation-oar>
- U.S. EPA Criteria Pollutant Information: <https://www.epa.gov/criteria-air-pollutants>
- U.S. EPA NAAQS Information: <https://www.epa.gov/criteria-air-pollutants/naaqs-table>
- U.S. EPA Network Assessments/Plans webpage: <https://www.epa.gov/amtic/state-monitoring-agency-annual-air-monitoring-plans-and-network-assessments>
- U.S. EPA NowCast Presentation:  
[https://www3.epa.gov/airnow/ani/pm25\\_aqi\\_reporting\\_nowcast\\_overview.pdf](https://www3.epa.gov/airnow/ani/pm25_aqi_reporting_nowcast_overview.pdf)
- U.S. EPA AIRNow webpage: <https://gispub.epa.gov/airnow/>
- U.S. EPA AQS AirData website: <https://www.epa.gov/outdoor-air-quality-data>
- U.S. EPA NowCast Calculator webpage:  
<https://www3.epa.gov/airnow/aqicalctest/nowcast.htm>
- U.S. EPA OAQPS QA Webpage: [Ambient Air Monitoring Quality Assurance | US EPA](#)
- U.S. EPA Exceptional Events webpage: <https://www.epa.gov/air-quality-analysis/treatment-data-influenced-exceptional-events>
- U.S. EPA List of Areas Protected by the Regional Haze Program:  
<https://www.epa.gov/visibility/list-areas-protected-regional-haze-program>
- U.S. EPA National Emissions Inventory database: <https://www.epa.gov/air-emissions-inventories/2014-national-emissions-inventory-nei-data>
- EPA Metadata Specifications: <https://www.epa.gov/geospatial/epa-metadata-technical-specification>
- EPA Region 9 Air Program Information: <http://www.epa.gov/region9/air/index.html>
- Arizona SIP Information: <https://azdeq.gov/SIP>
- ADEQ Natural and Exceptional Events Information:  
[https://azdeq.gov/naturalandexceptional\\_events](https://azdeq.gov/naturalandexceptional_events)
- MCAQD Online Interactive Air Quality Map:  
<http://alert.fcd.maricopa.gov/alert/Google/v3/airnow.html>
- MCAQD Annual Monitoring Plans and Network Assessments:  
<http://www.maricopa.gov/1669/Air-Monitoring-Network-Plans-Assessments>
- MCAQD Restrictions Web page: <https://www.maricopa.gov/5914/Outreach>
- MCAQD Dusts Sources, Control and Training: <https://www.maricopa.gov/1913/Dust-Sources-Control-and-Training>

# **APPENDIX I – Air Monitoring Data by Site**

Site information includes site location, spatial scale, site type, and site description.

## Blue Point (BP) (04-013-9702)

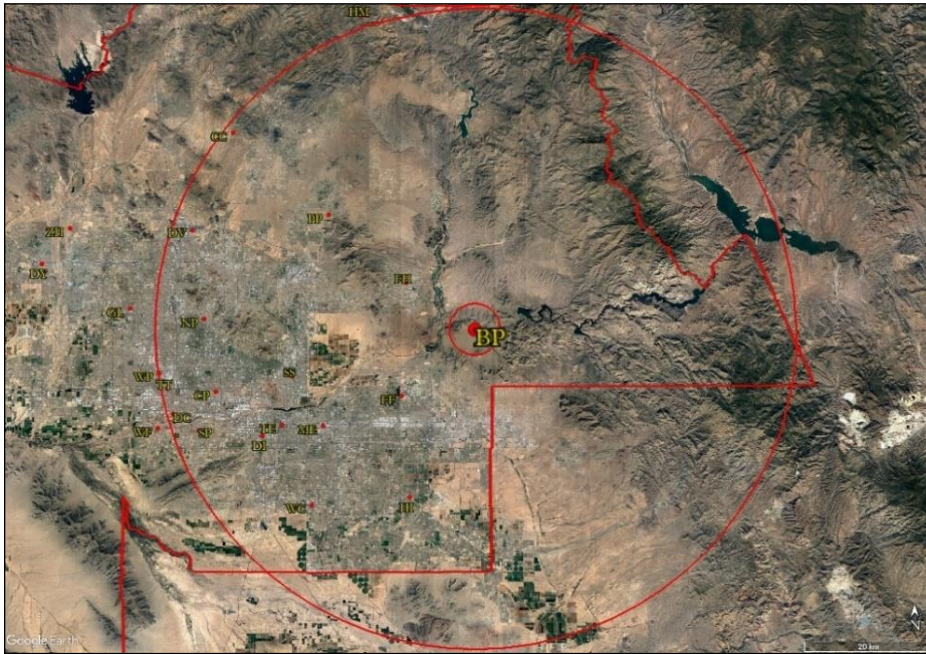

<b>Site Location</b>	Bush Hwy. & Usery Pass Rd., Maricopa County
<b>Spatial Scale</b>	Urban
<b>Site Type</b>	Maximum O <sub>3</sub> Concentration



**Site Description:** This site began operating in July 1995. This SLAMS location monitors for O<sub>3</sub>. Meteorological monitoring includes ambient temperature and wind speed/direction.

This site is located approximately 40 miles east of the Phoenix metropolitan area and represents maximum O<sub>3</sub> concentrations downwind from an urban area.

<b>BLUE POINT</b>	
County Abbreviation: BP AQS ID: 04-013-9702 Address: Bush Highway & Usery Pass Rd., Maricopa County Lat/Long Coordinates: 33.54558 N, -111.60972 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa	
<b>General Information</b>	
Pollutant	<b>O<sub>3</sub></b>
Parameter Code	44201
Parameter Occurrence Code	1
Collection Frequency	Continuous
Analysis Method (filter samples only)	Not Applicable
Any Proposal to Remove or Move Monitor?	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS</i> as per <i>§58.30?</i>	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>	
Number of 1-Point QC (Precision) Checks Performed (Gases)	31
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly
Number of Flow Rate Verifications Performed (PM)	Not Applicable
Frequency of Flow Rate Verifications	
Number of PE Audits Performed	2
Dates of PE Audits	05/09/2023 11/06/2023
Annual Precision & PE Audit Reports Submitted to AQS?	Yes
Date of Annual Data Certification Submission	04/30/24
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>	
<b>Appendix C Requirements - Monitoring Methodology</b>	
Date Sampling Started	01/01/1993
Monitor Type	SLAMS
Monitor Make - Model	Teledyne API – Model 400T
Method Code	087
Method Type (FRM, FEM, ARM)	FEM
<b>Appendix D Requirements - Network Design Criteria</b>	
Site Type	Max Ozone Concentration
Basic Monitoring Objective	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Urban
Monitoring Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>	
Distance between collocated samplers	Not Applicable

<b>BLUE POINT</b>		
Probe Height (distance above ground level to inlet)	2.9 meters	
Airflow Arc	360°	
Probe Sample Line Material	FEP	
Pollutant Sample Residence Time (seconds)	8.51	
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	1.9 meters
	Vertical	0 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction
	Vertical	no obstruction
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	15.8 meters
	Vertical	0 meters
Distance from Dripline of Closest Tree(s)	8.8 meters*	
Distance to Furnace or Flue	No Furnace or Flue	
Nearest Major Roadway	Bush Highway	
Distance and Direction to Road	160 meters, S	
Average Daily Traffic Count	6,110	
Groundcover	Pavement	

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

\* MCAQD is aware that these measurements do not meet siting requirements. The trees closest to the monitor inlets are not on MCAQD property. MCAQD is working with property owners to change the situation to make adjustments to achieve compliance.

## Buckeye (BE) (04-013-4011)

**Site Location** AZ Hwy. 85 & MC Hwy. 85, Buckeye

**Spatial Scale** Neighborhood for CO, and PM<sub>10</sub>  
Urban for NO<sub>2</sub> and O<sub>3</sub>

**Site Type** Population Exposure and Upwind Background for O<sub>3</sub>



**Site Description:** The Buckeye site began operating in August 2004. This SLAMS location monitors for CO, NO<sub>2</sub>, O<sub>3</sub>, and PM<sub>10</sub>. Meteorological monitoring includes ambient temperature, barometric pressure, relative humidity, and wind speed/direction.

The site is located at the Maricopa County Department of Transportation - Southwest Facility. The immediate area is agriculture and encroaching residential development.

<b>BUCKEYE</b>				
County ID: BE AQS ID: 04-013-4011 Address 26453 W MC85 Coordinates: 33.36985 N, -112.62068 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa				
<b>General Information</b>				
Pollutant	<b>CO</b>	<b>NO<sub>2</sub></b>	<b>O<sub>3</sub></b>	<b>PM<sub>10</sub></b>
Parameter Code	42101	42602	44201	81102
Parameter Occurrence Code	1	1	1	1
Collection Frequency	Continuous	Continuous	Continuous	Continuous
Analysis Method (filter samples only)	Not Applicable	Not Applicable	Not Applicable	Not Applicable
Any Proposal to Remove or Move Monitor?	No	No	No	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes	Yes	Yes	Yes
Is site suitable for comparison to the annual PM <sub>2.5</sub> NAAQS as per §58.30?	Not Applicable	Not Applicable	Not Applicable	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes	Yes	Yes	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>				
Number of 1-Point QC (Precision) Checks Performed (Gases)	31	32	33	Not Applicable
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly	Bi-Weekly	Bi-Weekly	
Number of Flow Rate Verifications Performed (PM)	Not Applicable	Not Applicable	Not Applicable	26
Frequency of Flow Rate Verifications				Bi-Weekly
Number of PE Audits Performed	2	2	2	3
Dates of PE Audits	01/12/23 07/11/23	01/12/23 07/10/23	06/12/23 12/14/23	01/12/23 04/05/23 10/02/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes	Yes	Yes
Date of Annual Data Certification Submission	4/30/24			
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>				
<b>Appendix C Requirements - Monitoring Methodology</b>				
Date Sampling Started	08/01/2004	08/01/2004	08/01/2004	08/01/2004
Monitor Type	SLAMS	SLAMS	SLAMS	SLAMS


BUCKEYE					
Monitor Make - Model		Teledyne API – Model 300T	Teledyne API – Model 200T	Teledyne API – Model 400T	Thermo – TEOM 1405-S
Method Code		093	099	087	079
PM Monitor Flow Type		Not Applicable	Not Applicable	Not Applicable	Low Volume
PM Monitor Collection Type		Not Applicable	Not Applicable	Not Applicable	Size Specific
Method Type (FRM, FEM, ARM)		FRM	FRM	FEM	FEM
Appendix D Requirements - Network Design Criteria					
Site Type		Population Exposure	Population Exposure	Upwind Background	Population Exposure
Basic Monitoring Objective		NAAQS Comparison	NAAQS Comparison	NAAQS Comparison	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)		Neighborhood	Urban	Urban	Neighborhood
Monitoring Season		Sep-Mar	Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?		Yes	Yes	Yes	Yes
Appendix E Requirements - Probe and Monitoring Path Siting Criteria					
Distance between collocated samplers		Not Applicable	Not Applicable	Not Applicable	Not Applicable
Probe Height (distance above ground level to inlet)		4.1 meters	4.1 meters	4.1 meters	4.3 meters
Airflow Arc		360°	360°	360°	360°
Probe Sample Line Material		FEP	FEP	FEP	Not Applicable
Pollutant Sample Residence Time (seconds)		6.18	7.75	9.87	Not Applicable
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0 meters	0 meters	0 meters	0 meters
	Vertical	1.5 meters	1.5 meters	1.5 meters	1.6 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction	no obstruction	no obstruction	no obstruction
	Vertical	no obstruction	no obstruction	no obstruction	no obstruction
Distance from Obstructions Not on Roof	Horizontal	no obstruction	no obstruction	no obstruction	no obstruction

BUCKEYE					
(horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Vertical	no obstruction	no obstruction	no obstruction	no obstruction
Distance from Dripline of Closest Tree(s)		12.8 meters	12.8 meters	12.8 meters	12.8 meters
Distance to Furnace or Flue		No Furnace or Flue	No Furnace or Flue	No Furnace or Flue	No Furnace or Flue
Nearest Major Roadway		U.S. Hwy 85	U.S. Hwy 85	U.S. Hwy 85	U.S. Hwy 85
Distance and Direction to Road		31 meters, N	31 meters, N	31 meters, N	31 meters, N
Average Daily Traffic Count		2,895	2,895	2,895	2,895
Groundcover		Pavement	Pavement	Pavement	Pavement

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Cave Creek (CC) (04-013-4008)

<b>Site Location</b>	32 <sup>nd</sup> St. & Carefree Hwy., Cave Creek
<b>Spatial Scale</b>	Urban
<b>Site Type</b>	Maximum O <sub>3</sub> Concentration

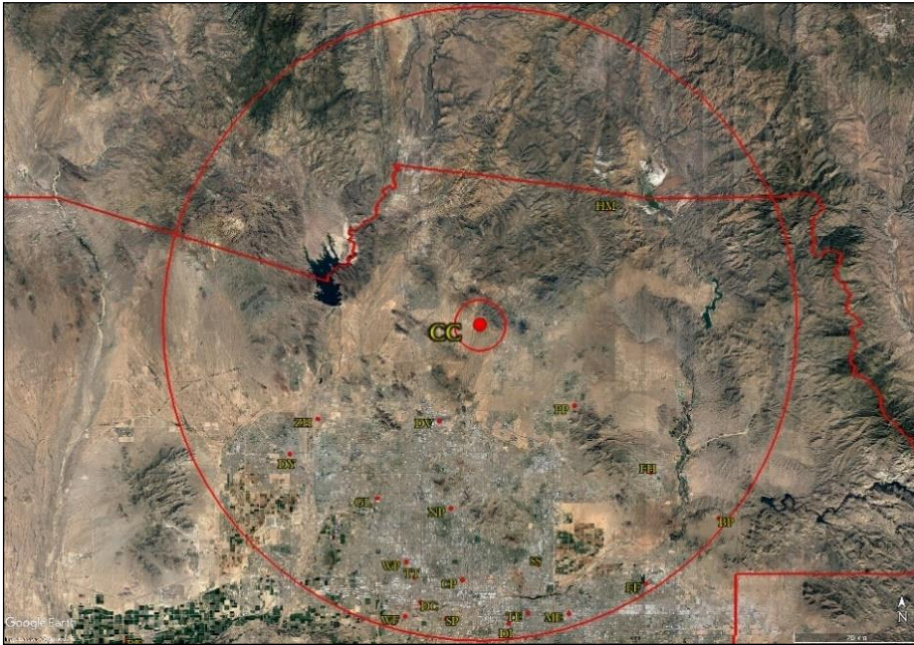

**Site Description:** The Cave Creek site began operating in July 2001. This SLAMS location monitors for O<sub>3</sub>. Meteorological monitoring includes ambient temperature, barometric pressure, rain, relative humidity, and wind speed/direction.

The site is located at the Maricopa County Cave Creek Recreation Area.

<b>CAVE CREEK</b>	
County ID: CC	
AQS ID: 04-013-4008	
Address: 37019 N Lava Lane, Phoenix	
Coordinates: 33.82169 N, -112.01726 W	
Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa	
<b>General Information</b>	
Pollutant	O <sub>3</sub>
Parameter Code	44201
Parameter Occurrence Code	1
Collection Frequency	Continuous
Analysis Method (filter samples only)	Not Applicable
Any Proposal to Remove or Move Monitor?	Yes
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS</i> as per §58.30?	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>	
Number of 1-Point QC (Precision) Checks Performed (Gases)	29
Frequency of 1-Point QC (Precision) Checks	Bi-weekly
2Number of Flow Rate Verifications Performed (PM)	Not Applicable
Frequency of Flow Rate Verifications	
Number of PE Audits Performed	2
Dates of PE Audits	04/03/23 10/02/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes
Date of Annual Data Certification Submission	4/30/24
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>	
<b>Appendix C Requirements - Monitoring Methodology</b>	
Date Sampling Started	07/20/2001
Monitor Type	SLAMS
Monitor Make - Model	Teledyne - API Model 400T
Method Code	087
Method Type (FRM, FEM, ARM)	FEM
<b>Appendix D Requirements - Network Design Criteria</b>	
Site Type	Max Ozone Concentration
Basic Monitoring Objective	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Urban
Monitoring Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>	
Distance between collocated samplers	Not Applicable

CAVE CREEK		
Probe Height (distance above ground level to inlet)		4.7 meters
Airflow Arc		360°
Probe Sample Line Material		FEP
Pollutant Sample Residence Time (seconds)		9.95
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0.9 meters
	Vertical	1.4 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	5.8 meters
	Vertical	0.6 meters
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	13.7 meters
	Vertical	1.2 meters
Distance from Dripline of Closest Tree(s)		11.9 meters
Distance to Furnace or Flue		No Furnace or Flue
Nearest Major Roadway		32 <sup>nd</sup> Street
Distance and Direction to Road		240 meters, NE
Average Daily Traffic Count		2,333
Groundcover		Pavement

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Central Phoenix (CP) (04-013-3002)


**Site Location** 19<sup>th</sup> St. & Roosevelt St., Phoenix

**Spatial Scale** Neighborhood

**Site Type** Population

Exposure for CO, O<sub>3</sub>, and PM<sub>10</sub>

Highest Concentration for NO<sub>2</sub> and SO<sub>2</sub>

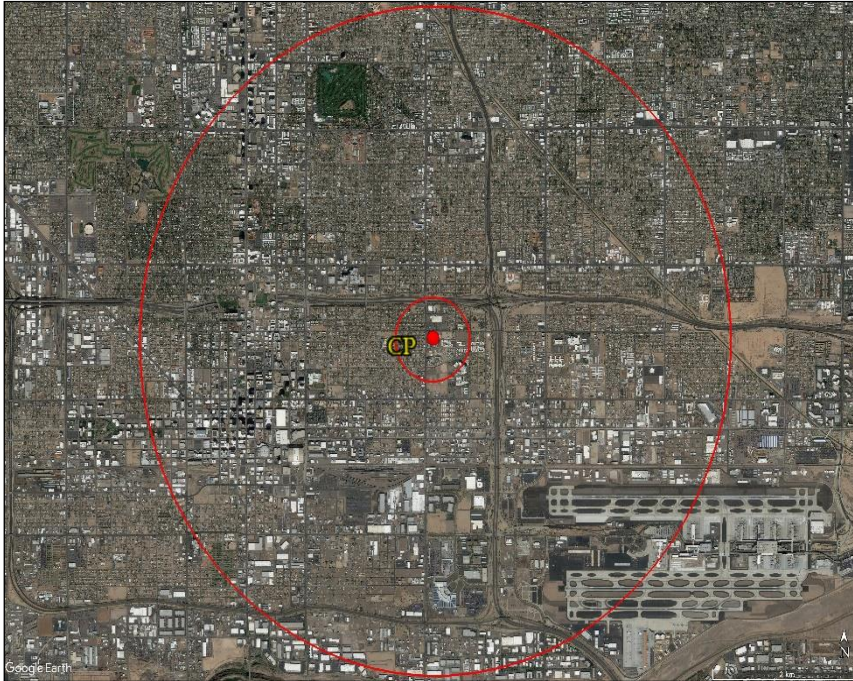

**Site Description:** The Central Phoenix site began operating in June 1962. This SLAMS location monitors for CO, PM<sub>10</sub>, NO<sub>2</sub>, O<sub>3</sub>, and SO<sub>2</sub>. Meteorological monitoring includes ambient temperature, barometric pressure, and wind speed/direction.

This site is located within the Maricopa County Public Health building.

**CENTRAL PHOENIX**

County ID: CP  
 AQS ID: 04-013-3002  
 Address: 1645 E Roosevelt St., Phoenix  
 Coordinates: 33.45797 N, -112.04659 W  
 Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa

**General Information**

Pollutant	CO	NO <sub>2</sub>	O <sub>3</sub>	SO <sub>2</sub>	PM <sub>10</sub>
Parameter Code	42101	42602	44201	42401	81102
Parameter Occurrence Code	1	6	1	4	4
Collection Frequency	Continuous	Continuous	Continuous	Continuous	Continuous
Analysis Method (filter samples only)	Not Applicable	Not Applicable	Not Applicable	Not Applicable	Not Applicable
Any Proposal to Remove or Move Monitor?	No	No	No	No	No
Does monitor operation meet 40 CFR Part 58, Subpart G – Appendices A, C, D, and E?	Yes	Yes	Yes	Yes	Yes
Is site suitable for comparison to the annual PM <sub>2.5</sub> NAAQS as per §58.30?	Not Applicable	Not Applicable	Not Applicable	Not Applicable	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes	Yes	Yes	Yes	Yes

**Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs**

Number of 1-Point QC (Precision) Checks Performed (Gases)	29	31	29	29	Not Applicable
Frequency of 1-Point QC (Precision) Checks	Bi-weekly	Bi-weekly	Bi-weekly	Bi-weekly	
Number of Flow Rate Verifications Performed (PM)	Not Applicable	Not Applicable	Not Applicable	Not Applicable	27
Frequency of Flow Rate Verifications					Bi-weekly
Number of PE Audits Performed	2	2	2	2	4
Dates of PE Audits	05/08/23 11/06/23	04/12/23 10/20/23	06/05/23 12/04/23	02/01/23 09/11/23	01/04/23 04/12/23 07/05/23 10/09/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes	Yes	Yes	Yes
Date of Annual Data Certification Submission	4/30/24				

**Appendix B Requirements - PSD Monitoring - Not Applicable**

**Appendix C Requirements - Monitoring Methodology**

Date Sampling Started	10/01/1966	01/01/1967	06/01/1967	01/01/1965	04/01/1985
Monitor Type	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS
Monitor Make - Model	Teledyne API - Model 300T	Teledyne API - Model 200T	Teledyne API - Model 400T	Teledyne API - Model 100T	Thermo - TEOM 1405-S

**CENTRAL PHOENIX**

Method Code	093	099	087	100	079
PM Monitor Flow Type	Not Applicable	Not Applicable	Not Applicable	Not Applicable	Low Volume
PM Monitor Collection Type	Not Applicable	Not Applicable	Not Applicable	Not Applicable	Size Specific
Method Type (FRM, FEM, ARM)	FRM	FRM	FEM	FEM	FEM

**Appendix D Requirements - Network Design Criteria**

Site Type	Population Exposure	Highest Concentration	Population Exposure	Highest Concentration	Population Exposure
Basic Monitoring Objective	NAAQS Comparison	NAAQS Comparison	NAAQS Comparison	NAAQS Comparison	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Neighborhood	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Monitoring Season	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes	Yes	Yes

**Appendix E Requirements - Probe and Monitoring Path Siting Criteria**


Distance between collocated samplers	Not Applicable	Not Applicable	Not Applicable	Not Applicable	Not Applicable	
Probe Height (distance above ground level to inlet)	11.8 meters	11.8 meters	11.8 meters	11.8 meters	12.8 meters	
Airflow Arc	360°	360°	360°	360°	360°	
Probe Sample Line Material	FEP	FEP	FEP	FEP	Not Applicable	
Pollutant Sample Residence Time (seconds)	9.16	14.5	9.69	9.93	Not Applicable	
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0 meters	0 meters	0 meters	0 meters	0 meters
	Vertical	1.9 meters	1.9 meters	1.9 meters	1.9 meters	2.4 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	1.6 meters	1.6 meters	1.6 meters	1.6 meters	no obstruction
	Vertical	0.9 meters	0.9 meters	0.9 meters	0.9 meters	no obstruction

**CENTRAL PHOENIX**

Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction	no obstruction	no obstruction	no obstruction	no obstruction
	Vertical	no obstruction	no obstruction	no obstruction	no obstruction	no obstruction
Distance from Dripline of Closest Tree(s)		23.7 meters	23.7 meters	23.7 meters	23.7 meters	26.5 meters
Distance to Furnace or Flue		No Furnace or Flue	No Furnace or Flue	No Furnace or Flue	No Furnace or Flue	No Furnace or Flue
Nearest Major Roadway A		16 <sup>th</sup> Street	16 <sup>th</sup> Street	16 <sup>th</sup> Street	16 <sup>th</sup> Street	16 <sup>th</sup> Street
Distance and Direction to Road		88 meters, W	88 meters, W	88 meters, W	88 meters, W	91 meters, W
Average Daily Traffic Count		31,475	31,475	31,475	31,475	31,475
Nearest Major Roadway B		Roosevelt St.	Roosevelt St.	Roosevelt St.	Roosevelt St.	Roosevelt St.
Distance and Direction to Road		75 meters, N	75 meters, N	75 meters, N	75 meters, N	75 meters, N
Average Daily Traffic Count		21,637	21,637	21,637	21,637	21,637
Groundcover		Pavement	Pavement	Pavement	Pavement	Pavement

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Durango Complex (DC) (04-013-9812)

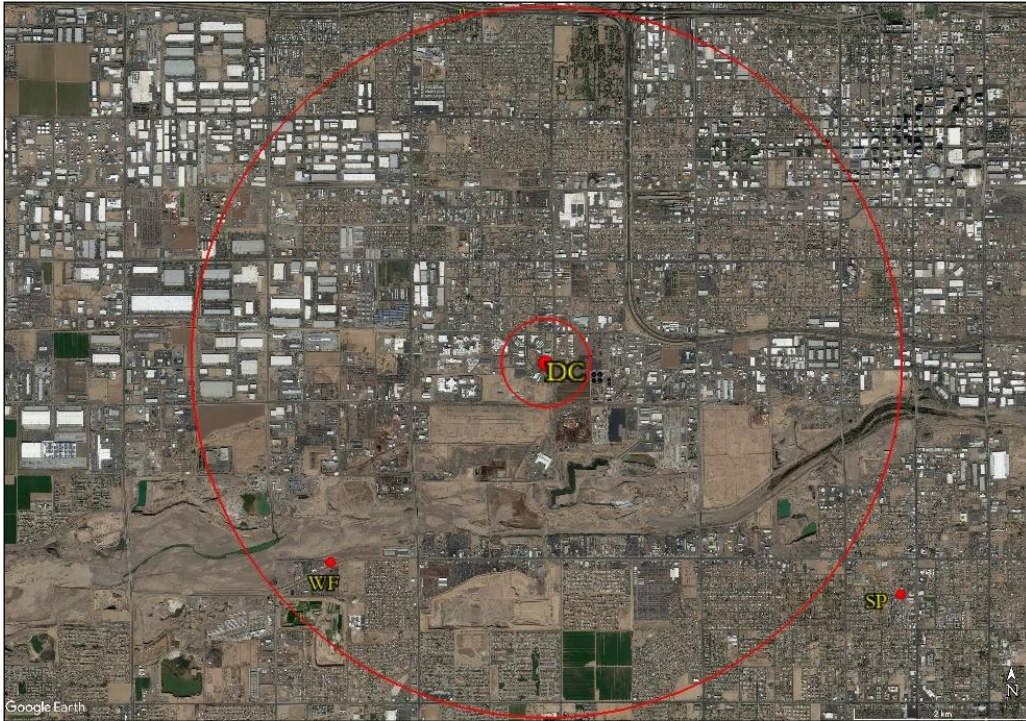

**Site Location** 27<sup>th</sup> Ave & Durango St., Phoenix

**Spatial Scale** Neighborhood

**Site Type** Highest Concentration



**Site Description:** This site began operating in January 1999. This SLAMS location monitors for PM<sub>10</sub>, PM<sub>2.5</sub>, and SO<sub>2</sub>. Meteorological monitoring includes ambient temperature, barometric pressure, relative humidity, and wind speed/direction.


The site is located inside the Maricopa County Department of Transportation storage yard.

<b>DURANGO COMPLEX</b>			
County ID: DC AQS ID: 04-013-9812 Address: 2702 RC Esterbrooks Blvd., Phoenix Coordinates: 33.42650 N, -112.11812 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa			
<b>General Information</b>			
Pollutant	<b>PM<sub>10</sub></b>	<b>PM<sub>2.5</sub></b>	<b>SO<sub>2</sub></b>
Parameter Code	81102	88101	42401
Parameter Occurrence Code	1	3	1
Collection Frequency	Continuous	Continuous	Continuous
Analysis Method (filter samples only)	Not Applicable	Not Applicable	Not Applicable
Any Proposal to Remove or Move Monitor?	No	No	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes	Yes	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS</i> as per §58.30?	Not Applicable	Yes	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes	Yes	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>			
Number of 1-Point QC (Precision) Checks Performed (Gases)	Not Applicable	Not Applicable	32
Frequency of 1-Point QC (Precision) Checks			Bi-Weekly
Number of Flow Rate Checks Performed (PM)	26	26	Not Applicable
Frequency of Flow Rate Verifications	Bi-Weekly	Bi-Weekly	
Number of PE Audits Performed	4	4	2
Dates of PE Audits	01/11/23 04/05/23 07/12/23 10/03/23	01/11/23 04/05/23 07/12/23 10/03/23	05/02/23 11/13/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes	Yes
Date of Annual Data Certification Submission	4/30/24		
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>			
<b>Appendix C Requirements - Monitoring Methodology</b>			
Date Sampling Started	07/01/1999	07/01/2005	01/01/2011
Monitor Type	SLAMS	SLAMS	SLAMS
Monitor Make - Model	Thermo - TEOM 1405-DF	Thermo - TEOM 1405-DF	Teledyne API - 100T
Method Code	208	182	100
PM Monitor Flow Type	Low Volume	Low Volume	Not Applicable
PM Monitor Collection Type	Dichotomous	Dichotomous	Not Applicable
Method Type (FRM, FEM, ARM)	FEM	FEM	FEM
<b>Appendix D Requirements - Network Design Criteria</b>			

<b>DURANGO COMPLEX</b>				
Site Type		Population Exposure	Highest Concentration	Highest Concentration
Basic Monitoring Objective		NAAQS Comparison	NAAQS Comparison	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)		Neighborhood	Neighborhood	Middle
Monitoring Season		Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?		Yes	Yes	Yes
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>				
Distance between collocated samplers		Not Applicable	Not Applicable	Not Applicable
Probe Height (distance above ground level to inlet)		4.4 meters	4.4 meters	4.4 meters
Airflow Arc		360°	360°	360°
Probe Sample Line Material		Not Applicable	Not Applicable	FEP
Pollutant Sample Residence Time (seconds)		Not Applicable	Not Applicable	6.51
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0 meters	0 meters	0.13 meters
	Vertical	1.7 meters	1.7 meters	1.8 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstructions	no obstructions	no obstructions
	Vertical	no obstructions	no obstructions	no obstructions
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	53.9 meters	53.9 meters	53.9 meters
	Vertical	0 meters	0 meters	0 meters
Distance from Dripline of Closest Tree(s)		15.5 meters	15.5 meters	20.1 meters
Distance to Furnace or Flue		No Furnace or Flue	No Furnace or Flue	No Furnace or Flue
Nearest Major Roadway		27 <sup>th</sup> Ave	27 <sup>th</sup> Ave	27 <sup>th</sup> Ave
Distance and Direction to Road		78 meters, E	76 meters, E	76 meters, E
Average Daily Traffic Count		19,349	19,349	19,349
Groundcover		Pavement	Pavement	Pavement

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Dysart (DY) (04-013-4010)

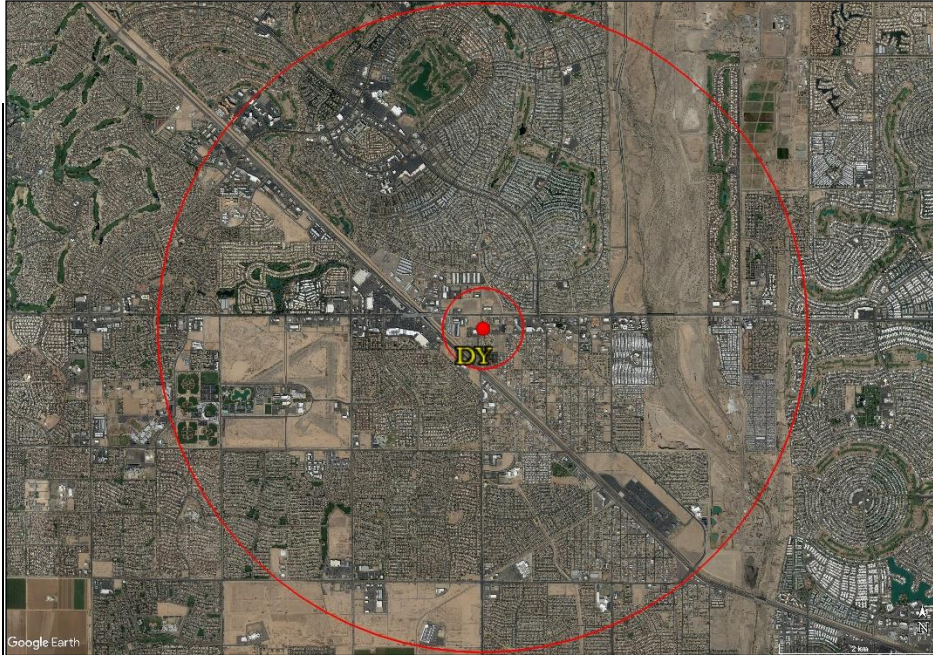

**Site Location** Bell Rd. & Dysart Rd., Surprise

**Spatial Scale** Neighborhood

**Site Type** Population Exposure



**Site Description:** The Dysart site began operating in July 2003. This SLAMS location monitors for  $O_3$  and  $PM_{10}$ . Meteorological monitoring includes ambient temperature, barometric pressure, relative humidity, and wind speed/direction.

The site is located at the Maricopa County Facility Maintenance Yard on the corner of Bell Rd. and Dysart Rd. The site is in a growing population area in the northwest valley and is surrounded by a variety of land use.

<b>DYSART</b>		
County ID: DY AQS ID: 04-013-4010 Address: 16825 N Dysart Rd., Surprise Coordinates: 33.63718 N, -112.34185 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa		
<b>General Information</b>		
Pollutant	<b>O<sub>3</sub></b>	<b>PM<sub>10</sub></b>
Parameter Code	44201	81102
Parameter Occurrence Code	1	1
Collection Frequency	Continuous	Continuous
Analysis Method (filter samples only)	Not Applicable	Not Applicable
Any Proposal to Remove or Move Monitor?	No	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS</i> as per §58.30?	Not Applicable	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>		
Number of 1-Point QC (Precision) Checks Performed (Gases)	30	Not Applicable
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly	Applicable
Number of Flow Rate Verifications Performed (PM)	Not Applicable	26
Frequency of Flow Rate Verifications	Applicable	Bi-Weekly
Number of PE Audits Performed	2	4
Dates of PE Audits	04/04/23 10/11/23	01/05/23 04/05/23 07/07/23 10/11/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes
Date of Annual Data Certification Submission	4/30/24	
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>		
<b>Appendix C Requirements - Monitoring Methodology</b>		
Date Sampling Started	7/21/2003	07/14/2003
Monitor Type	SLAMS	SLAMS
Monitor Make - Model	Teledyne API – 400T	Thermo - TEOM 1405-S
Method Code	087	079
PM Monitor Flow Type	Not Applicable	Low Volume
PM Monitor Collection Type	Not Applicable	Size Specific
Method Type (FRM, FEM, ARM)	FEM	FEM

DYSART			
Appendix D Requirements - Network Design Criteria			
Site Type		Population Exposure	Population Exposure
Basic Monitoring Objective		NAAQS Comparison	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)		Neighborhood	Neighborhood
Monitoring Season		Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?		Yes	Yes
Appendix E Requirements - Probe and Monitoring Path Siting Criteria			
Distance between collocated samplers		Not Applicable	Not Applicable
Probe Height (distance above ground level to inlet)		4.2 meters	4.4 meters
Airflow Arc		360°	360°
Probe Sample Line Material		FEP	Not Applicable
Pollutant Sample Residence Time (seconds)		4.79	Not Applicable
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0 meters	0 meters
	Vertical	1.7 meters	1.5 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstructions	no obstructions
	Vertical	no obstructions	no obstructions
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	36.5 meters	36.5 meters
	Vertical	0 meters	0 meters
Distance from Dripline of Closest Tree(s)		49.3 meters	51.2 meters
Distance to Furnace or Flue		No Furnace or Flue	No Furnace or Flue
Nearest Major Roadway A		Dysart	Dysart
Distance and Direction to Road		17 meters, W	12 meters, W
Average Daily Traffic Count		12,000	12,000
Nearest Major Roadway B		Bell Rd	Bell Rd
Distance and Direction to Road		495 meters, N	460 meters, N
Average Daily Traffic Count		35,957	35,957

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Eastwood (EA) (04-013-4021)



<b>Site Location</b>	36 <sup>th</sup> Street & Interstate 10
<b>Spatial Scale</b>	Micro
<b>Site Type</b>	Source-Oriented



**Site Description:** The Eastwood site began operating in March 2021. This SLAMS location monitors for CO, NO<sub>2</sub>, and PM<sub>2.5</sub>. Meteorological monitoring includes ambient temperature, relative humidity, and wind speed/direction.

The site is one of two near-road air monitoring sites and is located on the south side of the I-10 East.

**EASTWOOD**

County ID: EA

AQS ID: 04-013-4021

Address: 4135 S. 36th Street, Phoenix

Coordinates: 33.41046 N, -112.00264 W

Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa

**General Information**

Pollutant	CO	NO <sub>2</sub>	PM <sub>2.5</sub>
Parameter Code	42101	42602	88101
Parameter Occurrence Code	1	1	3
Collection Frequency	Continuous	Continuous	Continuous
Analysis Method (Filter samples only)	Not Applicable	Not Applicable	Not Applicable
Analytical Laboratory (filter samples only)	Not Applicable	Not Applicable	Not Applicable
Any Proposal to Remove or Move Monitor?	No	No	No
Does monitor operation meet 40 CFR Part 58, Subpart G – Appendices A, C, D, and E?	Yes	Yes	Yes
Is site suitable for comparison to the annual PM <sub>2.5</sub> NAAQS as per §58.30?	Not Applicable	Not Applicable	Yes
Are Data Comparable to Respective NAAQS?	Yes	Yes	Yes

**Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs**

Number of 1-Point QC (Precision) Checks Performed (Gases)	34	34	Not Applicable
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly	Bi-Weekly	
Number of Flow Rate Verifications Performed (PM)	Not Applicable	Not Applicable	27
Frequency of Flow Rate Verifications			Bi-Weekly
Number of PE Audits Performed	2	2	5
Dates of PE Audits	03/07/23 09/05/23	02/09/23 08/09/23	03/07/23 06/13/23 6/22/23 09/05/23 12/14/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes	Yes
Date of Annual Data Certification Submission	4/30/24		


**Appendix B Requirements - PSD Monitoring - Not Applicable****Appendix C Requirements - Monitoring Methodology**

Date Sampling Started	03/05/2021	03/05/2021	03/05/2021
Monitor Type	SLAMS	SLAMS	SLAMS

Monitor Make - Model	Teledyne - API 300T		Teledyne - API 200T	Thermo - TEOM 1405-DF
Method Code	93		99	182
PM Monitor Flow Type	Not Applicable		Not Applicable	Low Volume
PM Monitor Collection Type	Not Applicable		Not Applicable	Dichotomous
Method Type (FRM, FEM, ARM)	FRM		FRM	FEM
<b>Appendix D Requirements - Network Design Criteria</b>				
Site Type	Source-Oriented		Source-Oriented	Source-Oriented
Basic Monitoring Objective	NAAQS Comparison		NAAQS Comparison	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Micro		Micro	Micro
Monitoring Season	Jan-Dec		Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes		Yes	Yes
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>				
Distance between collocated samplers	Not Applicable		Not Applicable	Not Applicable
Probe Height (distance above ground level to inlet)	4.3 meters		4.3 meters	4.4 meters
Airflow Arc	360°		360°	360°
Probe Sample Line Material	FEP		FEP	Not Applicable
Pollutant Sample Residence Time (seconds)	5.29		7.33	Not Applicable
Filter Sample Material	Not Applicable		Not Applicable	Not Applicable
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0.3 meters	0.3 meters	0 meters
	Vertical	1.6 meters	1.6 meters	1.7 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction	no obstruction	no obstruction
	Vertical	no obstruction	no obstruction	no obstruction
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	44.8 meters	44.8 meters	44.8 meters
	Vertical	0 meters	0 meters	0 meters
Distance from Dripline of Closest Tree(s)	25.6 meters		25.6 meters	28.3 meters
Distance to Furnace or Flue	No Furnace or Flue		No Furnace or Flue	No Furnace or Flue
Nearest Major Roadway	I-10		I-10	I-10
Distance and Direction to Road	24 meters, N		24 meters, N	24 meters, N
Average Daily Traffic Count	121,222		121,222	121,222
Groundcover	Gravel		Gravel	Gravel

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Falcon Field (FF) (04-013-1010)

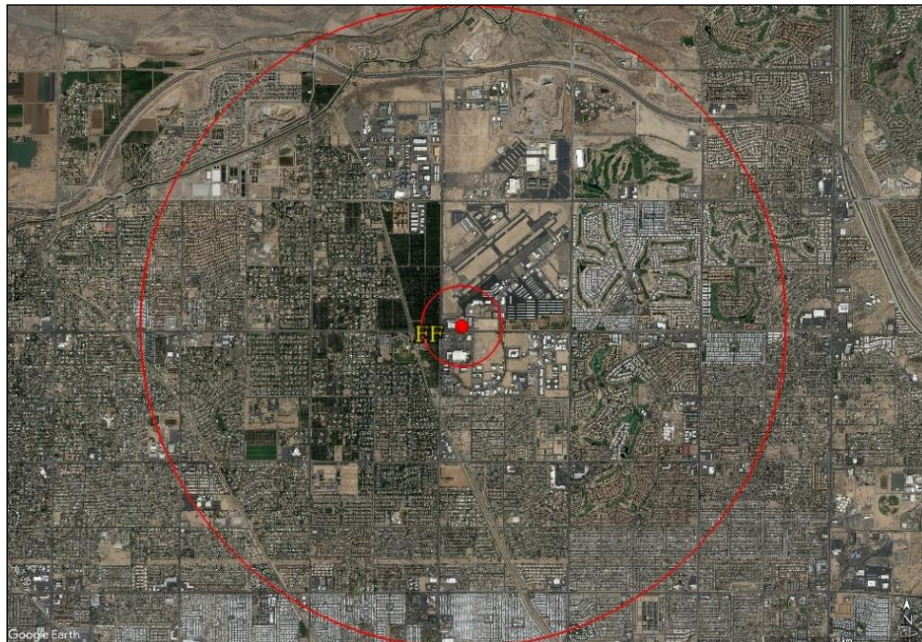

**Site Location** Greenfield Rd. & McKellips Rd., Mesa

**Spatial Scale** Neighborhood

**Site Type** Population Exposure



**Site Description:** This site began operating in June 1989. This SLAMS location monitors for O<sub>3</sub>. Meteorological monitoring includes ambient temperature and relative humidity.


The site is located at a fire station near an airfield within a growing residential area. In 2020, wind speed and wind direction monitoring ceased at this location due to no longer being able to secure a wind tower to the roof of the fire station. The search for a new location in the same general area where an air monitoring shelter can be installed is underway.

<b>FALCON FIELD</b>	
County ID: FF AQS ID: 04-013-1010 Address: 4530 E McKellips Rd, Mesa Coordinates: 33.45244 N, -111.73327 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa	
<b>General Information</b>	
Pollutant	<b>O<sub>3</sub></b>
Parameter Code	44201
Parameter Occurrence Code	1
Collection Frequency	Continuous
Analysis Method (filter samples only)	Not Applicable
Any Proposal to Remove or Move Monitor?	Yes
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes
Is site suitable for comparison to the <i>annual</i> PM <sub>2.5</sub> NAAQS as per §58.30?	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>	
Number of 1-Point QC (Precision) Checks Performed (Gases)	30
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly
Number of Flow Rate Verifications Performed (PM)	Not Applicable
Frequency of Flow Rate Verifications	
Number of PE Audits Performed	2
Dates of PE Audits	01/06/23 07/05/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes
Date of Annual Data Certification Submission	4/30/24
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>	
<b>Appendix C Requirements - Monitoring Methodology</b>	
Date Sampling Started	06/01/1989
Monitor Type	SLAMS
Monitor Make - Model	Teledyne API – 400T
Method Code	087
Method Type (FRM, FEM, ARM)	FEM
<b>Appendix D Requirements - Network Design Criteria</b>	
Site Type	Population Exposure
Basic Monitoring Objective	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Neighborhood
Monitoring Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>	

<b>FALCON FIELD</b>		
Distance between collocated samplers		Not Applicable
Probe Height (distance above ground level to inlet)		8.9 meters
Airflow Arc		360°
Probe Sample Line Material		FEP
Pollutant Sample Residence Time (seconds)		19.11
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0 meters
	Vertical	3.3 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	5.7 meters
	Vertical	0 meters
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	41.1 meters
	Vertical	0 meters
Distance from Dripline of Closest Tree(s)		22.9 meters
Distance to Furnace or Flue		No Furnace or Flue
Nearest Major Roadway		McKellips
Distance and Direction to Road		58 meters, S
Average Daily Traffic Count		18,337
Groundcover		Pavement

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Fountain Hills (FH) (04-013-9704)

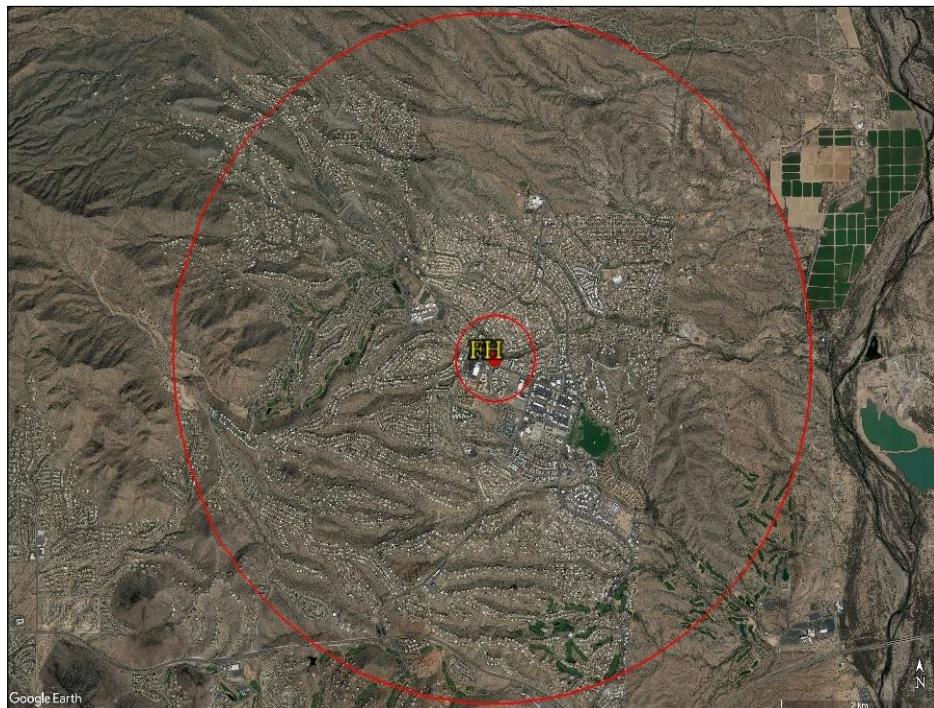

<b>Site Location</b>	Fountain Hills Blvd. & Palisades Blvd., Fountain Hills
<b>Spatial Scale</b>	Neighborhood
<b>Site Type</b>	Maximum O <sub>3</sub> Concentration



**Site Description:** The site began operating in April 1996 at a Fountain Hills fire station. This SLAMS location monitors for O<sub>3</sub> only. Meteorological monitoring includes ambient temperature, barometric pressure, relative humidity, and wind speed/direction.

The site is located approximately 15 miles northeast of the Phoenix metropolitan area and represents maximum O<sub>3</sub> concentrations downwind from an urban area. Furthermore, the site sits on the fringes of the central basin district along the predominant summer/fall daytime wind direction.


<b>FOUNTAIN HILLS</b>	
County ID: FH AQS ID: 04-013-9704 Address: 16426 E. Palisades Blvd., Fountain Hills Coordinates: 33.61092 N, -111.72534 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa	
<b>General Information</b>	
Pollutant	<b>O<sub>3</sub></b>
Parameter Code	44201
Parameter Occurrence Code	1
Collection Frequency	Continuous
Analysis Method (filter samples only)	Not Applicable
Any Proposal to Remove or Move Monitor?	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS</i> as per §58.30?	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>	
Number of 1-Point QC (Precision) Checks Performed (Gases)	29
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly
Number of Flow Rate Verifications Performed (PM)	Not Applicable
Frequency of Flow Rate Verifications	
Number of PE Audits Performed	2
Dates of PE Audits	02/06/23 09/06/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes
Date of Annual Data Certification Submission	4/30/24
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>	
<b>Appendix C Requirements - Monitoring Methodology</b>	
Date Sampling Started	04/01/1996
Monitor Type	SLAMS
Monitor Make – Model	Teledyne API – 400T
Method Code	087
Method Type (FRM, FEM, ARM)	FEM
<b>Appendix D Requirements - Network Design Criteria</b>	
Site Type	Population Exposure
Basic Monitoring Objective	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Neighborhood
Monitoring Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>	
Distance between collocated samplers	Not Applicable

<b>FOUNTAIN HILLS</b>		
Probe Height (distance above ground level to inlet)		4.4 meters
Airflow Arc		360°
Probe Sample Line Material		FEP
Pollutant Sample Residence Time (seconds)		9.01
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0.1 meters
	Vertical	1.8 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstructions
	Vertical	no obstructions
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	8.2 meters
	Vertical	0 meters
Distance from Dripline of Closest Tree(s)		15 meters
Distance to Furnace or Flue		No Furnace or Flue
Nearest Major Roadway		Palisades Blvd
Distance and Direction to Road		70 meters, SW
Average Daily Traffic Count		17,837
Groundcover		Pavement

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Glendale (GL) (04-013-2001)

<b>Site Location</b>	59 <sup>th</sup> Ave. & Olive Ave., Glendale
<b>Spatial Scale</b>	Neighborhood
<b>Site Type</b>	Population Exposure

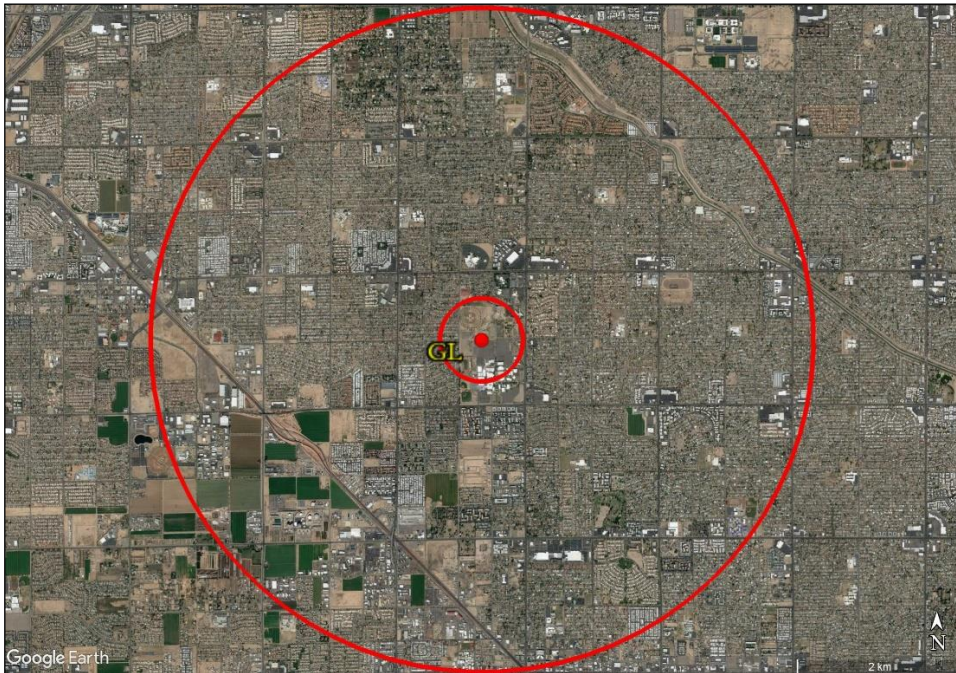

**Site Description:** The site began operating in January 1974. This SLAMS location monitors for O<sub>3</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub>. Meteorological monitoring includes ambient temperature, barometric pressure, relative humidity, and wind speed/direction.

The site is located on the grounds of Glendale Community College near homes, various strip malls, food establishments, and parks.


<b>GLENDALE</b>			
County ID: GL			
AQS ID: 04-013-2001			
Address: 6001 W Olive, Glendale			
Coordinates: 33.57453 N, -112.19193 W			
Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa			
<b>General Information</b>			
Pollutant	<b>O<sub>3</sub></b>	<b>PM<sub>10</sub></b>	<b>PM<sub>2.5</sub></b>
Parameter Code	44201	81102	88101
Parameter Occurrence Code	1	1	3
Collection Frequency	Continuous	Continuous	Continuous
Analysis Method (filter samples only)	Not Applicable	Not Applicable	Not Applicable
Any Proposal to Remove or Move Monitor?	No	No	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes	Yes	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS as per §58.30?</i>	Not Applicable	Not Applicable	Yes
Are Data Comparable to Respective NAAQS?	Yes	Yes	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>			
Number of 1-Point QC (Precision) Checks Performed (Gases)	30	Not Applicable	Not Applicable
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly		
Number of Flow Rate Verifications Performed (PM)	Not Applicable	27	27
Frequency of Flow Rate Verifications		Bi-Weekly	Bi-Weekly
Number of PE Audits Performed	2	4	4
Dates of PE Audits	04/05/23 10/04/23	02/23/23 05/03/23 08/07/23 11/21/23	02/23/23 05/03/23 08/07/23 11/21/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes	Yes
Date of Annual Data Certification Submission	4/30/24		
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>			
<b>Appendix C Requirements - Monitoring Methodology</b>			
Date Sampling Started	01/01/1974	07/01/1987	6/1/2011
Monitor Type	SLAMS	SLAMS	SLAMS
Monitor Make - Model	Teledyne API – 400T	Thermo - TEOM 1405- DF	Thermo - TEOM 1405- DF

<b>GLENDALE</b>				
Method Code		087	208	182
PM Monitor Flow Type		Not Applicable	Low Volume	Low Volume
PM Monitor Collection Type		Not Applicable	Dichotomous	Dichotomous
Method Type (FRM, FEM, ARM)		FEM	FEM	FEM
<b>Appendix D Requirements - Network Design Criteria</b>				
Site Type		Population Exposure	Population Exposure	Population Exposure
Basic Monitoring Objective		NAAQS Comparison	NAAQS Comparison	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)		Neighborhood	Neighborhood	Neighborhood
Monitoring Season		Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?		Yes	Yes	Yes
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>				
Distance between collocated samplers		Not Applicable	Not Applicable	Not Applicable
Distance between PM <sub>10</sub> and PM <sub>2.5</sub> monitors		Not Applicable	0 meters	0 meters
Probe Height (distance above ground level to inlet)		4.5 meters	4.9 meters	4.9 meters
Airflow Arc		360°	360°	360°
Probe Sample Line Material		FEP	Not Applicable	Not Applicable
Pollutant Sample Residence Time (seconds)		9.16	Not Applicable	Not Applicable
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0.1 meters	0 meters	0 meters
	Vertical	1.6 meters	2.0 meters	2.0 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstructions	no obstructions	no obstructions
	Vertical	no obstructions	no obstructions	no obstructions
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstructions	no obstructions	no obstructions
	Vertical	no obstructions	no obstructions	no obstructions
Distance from Dripline of Closest Tree(s)		15.5 meters	18.3 meters	18.3 meters
Distance to Furnace or Flue		No Furnace or Flue	No Furnace or Flue	No Furnace or Flue

<b>GLENDALE</b>			
Nearest Major Roadway A	Olive Ave	Olive Ave	Olive Ave
Distance and Direction to Road	225 meters, S	227 meters, S	227 meters, S
Average Daily Traffic Count	25,000	25,000	25,000
Nearest Major Roadway B	59 <sup>th</sup> Ave	59 <sup>th</sup> Ave	59 <sup>th</sup> Ave
Distance and Direction to Road	475 meters, E	430 meters, E	430 meters, E
Average Daily Traffic Count	25,394	25,394	25,394
Groundcover	Pavement	Pavement	Pavement

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Higley (HI) (04-013-4006)

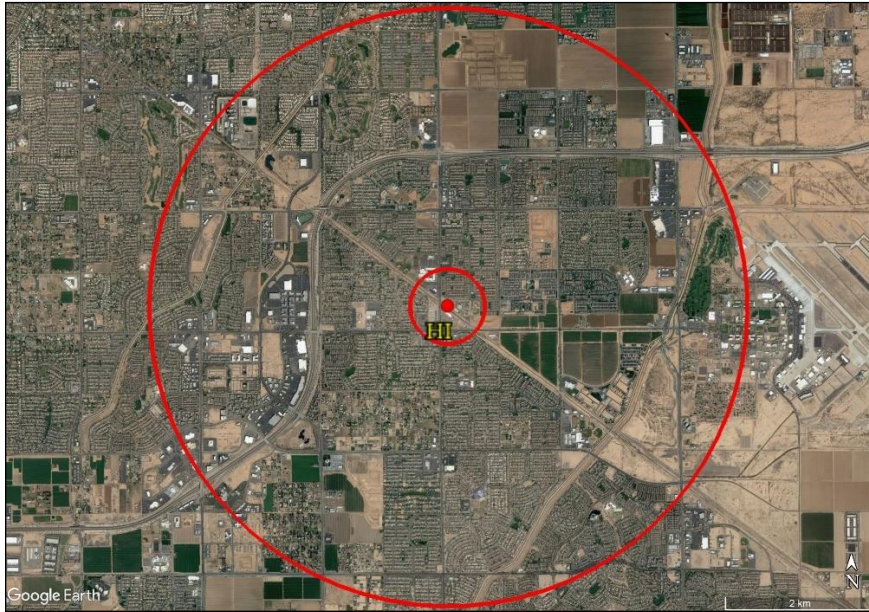

<b>Site Location</b>	Higley Rd. & Williams Field Rd., Gilbert
<b>Spatial Scale</b>	Neighborhood
<b>Site Type</b>	Population Exposure



**Site Description:** Originally, ADEQ began monitoring at this site in 1994 to measure background particulate concentrations near the urban limits of Maricopa County. The MCAQD assumed operating this site in July 2000. This SLAMS location monitors for PM<sub>10</sub>. Meteorological monitoring includes ambient temperature, barometric pressure, and wind speed/direction.

The site is in a suburban area near homes, strip malls, and schools with limited agricultural operations nearby.


<b>HIGLEY</b>	
County ID: HI AQS ID: 04-013-4006 Address: 2207 S Higley Rd., Gilbert Coordinates: 33.30995 N, -111.72003 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa	
<b>General Information</b>	
Pollutant	<b>PM<sub>10</sub></b>
Parameter Code	81102
Parameter Occurrence Code	1
Collection Frequency	Continuous
Analysis Method (filter samples only)	Not Applicable
Any Proposal to Remove or Move Monitor?	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes
Is site suitable for comparison to the <i>annual</i> PM <sub>2.5</sub> NAAQS as per §58.30?	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>	
Number of 1-Point QC (Precision) Checks Performed (Gases)	Not Applicable
Frequency of 1-Point QC (Precision) Checks	
Number of Flow Rate Verifications Performed (PM)	25
Frequency of Flow Rate Verifications	Bi-Weekly
Number of PE Audits Performed	4
Dates of PE Audits	02/16/23 05/11/23 08/01/23 11/08/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes
Date of Annual Data Certification Submission	4/30/24
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>	
<b>Appendix C Requirements - Monitoring Methodology</b>	
Date Sampling Started	07/01/2000
Monitor Type	SLAMS
Monitor Make - Model	Thermo – TEOM 1405-S
Method Code	079
PM Monitor Flow Type	Low Volume
PM Monitor Collection Type	Size Specific
Method Type (FRM, FEM, ARM)	FEM
<b>Appendix D Requirements - Network Design Criteria</b>	
Site Type	Population Exposure

<b>HIGLEY</b>		
Basic Monitoring Objective	NAAQS Comparison	
Monitoring Scale (Spatial Scale Represented)	Neighborhood	
Monitoring Season	Jan-Dec	
Network Meets Minimum Number of Monitors Required?	Yes	
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>		
Distance between collocated samplers	Not Applicable	
Probe Height (distance above ground level to inlet)	3.7 meters	
Airflow Arc	360°	
Probe Sample Line Material	Not Applicable	
Pollutant Sample Residence Time (seconds)	Not Applicable	
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0 meters
	Vertical	0.9 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstructions
	Vertical	no obstructions
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstructions
	Vertical	no obstructions
Distance from Dripline of Closest Tree(s)	36.6 meters	
Distance to Furnace or Flue	No Furnace or Flue	
Nearest Major Roadway A	Higley Rd	
Distance and Direction to Road	117 meters, E	
Average Daily Traffic Count	18,298	
Nearest Major Roadway B	Williams Field Rd	
Distance and Direction to Road	410 meters, S	
Average Daily Traffic Count	11,500	
Groundcover	Pavement	

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Humboldt Mountain (HM) (04-013-9508)

<b>Site Location</b>	Humboldt Mtn. Summit
<b>Spatial Scale</b>	Regional
<b>Site Type</b>	Maximum O <sub>3</sub> Concentration

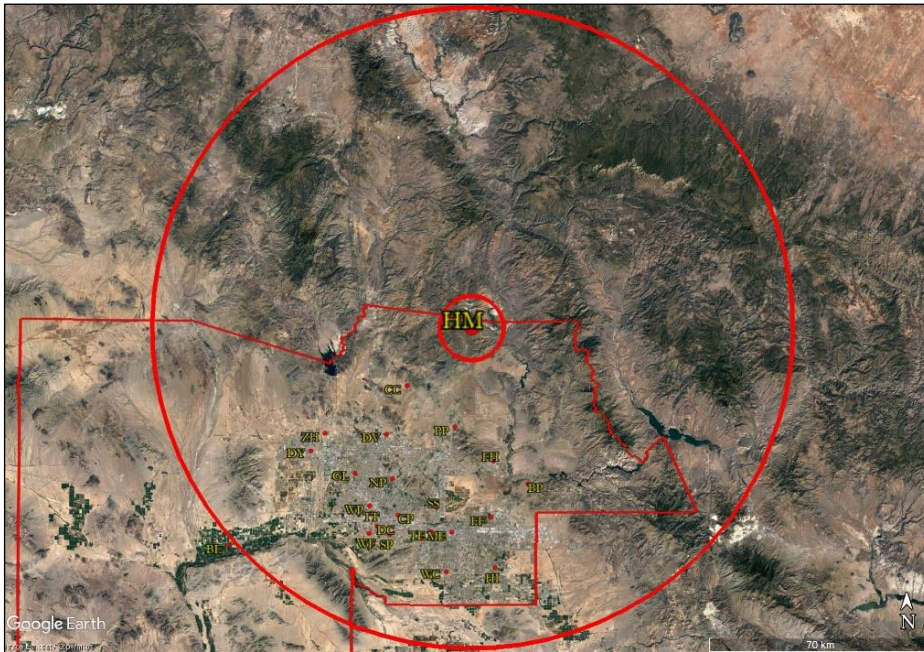

**Site Description:** This site began operating in August 1995. This SLAMS location monitors for O<sub>3</sub>. Meteorological monitoring includes ambient temperature and relative humidity.


The site is located on Federal Aviation Agency (FAA) property within the Tonto National Forest. In 2019, the long-anticipated move of the station into a new facility occurred. The new station is about 15 meters away from the National Forest Service building that once housed it. This site is located approximately 40 miles NE of the Phoenix metropolitan area at an elevation of 5190 feet and represents extreme downwind O<sub>3</sub> concentrations.

<b>HUMBOLDT MOUNTAIN</b>	
County ID: HM AQS ID: 04-013-9508 Address: E State Hwy 562- FAA Radar Station, Tonto National Forest Coordinates: 33.98280 N, -111.79871 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa	
<b>General Information</b>	
Pollutant	<b>O<sub>3</sub></b>
Parameter Code	44201
Parameter Occurrence Code	1
Collection Frequency	Continuous
Analysis Method (filter samples only)	Not Applicable
Any Proposal to Remove or Move Monitor?	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS</i> as per §58.30?	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>	
Number of 1-Point QC (Precision) Checks Performed (Gases)	30
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly
Number of Flow Rate Verifications Performed (PM)	Not Applicable
Frequency of Flow Rate Verifications	
Number of PE Audits Performed	2
Dates of PE Audits	04/06/23 10/23/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes
Date of Annual Data Certification Submission	4/30/24
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>	
<b>Appendix C Requirements - Monitoring Methodology</b>	
Date Sampling Started	08/01/1995
Monitor Type	SLAMS
Monitor Make – Model	Teledyne API – 400T
Method Code	087
Method Type (FRM, FEM, ARM)	FEM
<b>Appendix D Requirements - Network Design Criteria</b>	
Site Type	Maximum O <sub>3</sub> Concentration
Basic Monitoring Objective	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Regional
Monitoring Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>	

<b>HUMBOLDT MOUNTAIN</b>		
Distance between collocated samplers		Not Applicable
Probe Height (distance above ground level to inlet)		4.4 meters
Airflow Arc		360°
Probe Sample Line Material		FEP
Pollutant Sample Residence Time (seconds)		8.96
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0.7 meters
	Vertical	1.5 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction
	Vertical	no obstruction
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction
	Vertical	no obstruction
Distance from Dripline of Closest Tree(s)		no tree
Distance to Furnace or Flue		No Furnace or Flue
Nearest Major Roadway - Remote Mountaintop - Access using E. State Hwy 562		Cave Creek Road
Distance and Direction to Road		15 miles south
Average Daily Traffic Count		792
Groundcover		Soil / Vegetation

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Mesa (ME) (04-013-1003)

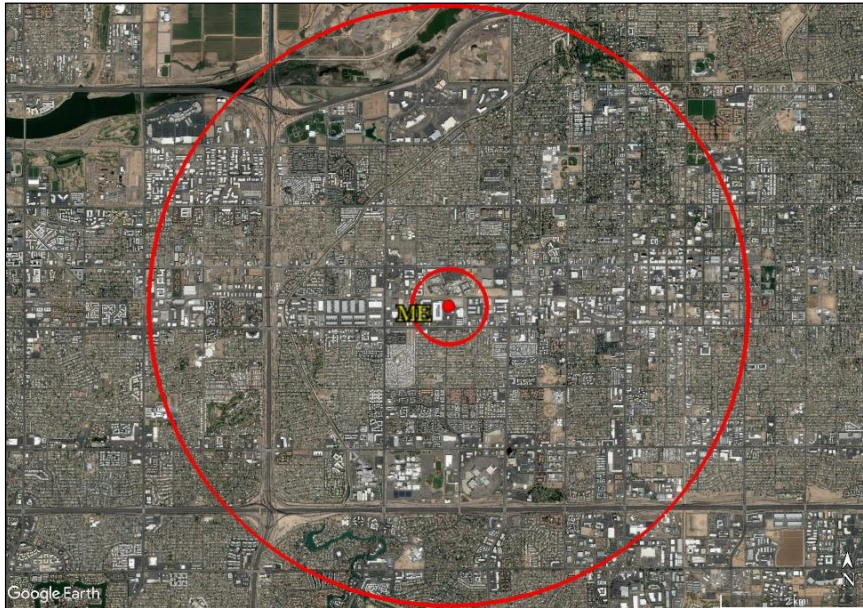

**Site Location** Broadway Rd. & Brooks Ave.,  
Mesa

**Spatial Scale** Neighborhood

**Site Type** Population Exposure



**Site Description:** This site began operating in January 1978. This SLAMS location monitors for CO, O<sub>3</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub>. Meteorological monitoring includes ambient temperature, barometric pressure, relative humidity, and wind speed/direction.

The site is located at Mesa Brooks Reservoir, which is an area that contains residential, commercial, and industrial properties.


<b>MESA</b>				
County ID: ME AQS ID: 04-013-1003 Address: 310 S Brooks, Mesa Coordinates: 33.41018 N, -111.86536 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa				
<b>General Information</b>				
Pollutant	<b>CO</b>	<b>O<sub>3</sub></b>	<b>PM<sub>10</sub></b>	<b>PM<sub>2.5</sub></b>
Parameter Code	42101	44201	81102	88101
Parameter Occurrence Code	1	1	1	3
Collection Frequency	Continuous	Continuous	Continuous	Continuous
Analysis Method (filter samples only)	Not Applicable	Not Applicable	Not Applicable	Not Applicable
Any Proposal to Remove or Move Monitor?	No	No	No	No
Does monitor operation meet 40 CFR Part 58, Subpart G – Appendices A, C, D, and E?	Yes	Yes	Yes	Yes
Is site suitable for comparison to the annual PM <sub>2.5</sub> NAAQS as per §58.30?	Not Applicable	Not Applicable	Not Applicable	Yes
Are Data Comparable to Respective NAAQS?	Yes	Yes	Yes	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>				
Number of 1-Point QC (Precision) Checks Performed (Gases)	37	31	Not Applicable	
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly	Bi-Weekly		
Number of Flow Rate Verifications Performed (PM)	Not Applicable	Not Applicable	26	26
Frequency of Flow Rate Verifications			Bi-Weekly	Bi-Weekly
Number of PE Audits Performed	2	2	4	4
Dates of PE Audits	01/03/23 07/06/23	04/10/23 10/25/23	02/01/23 05/11/23 08/10/23 11/07/23	02/01/23 05/11/23 08/10/23 11/07/23

MESA				
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes	Yes	Yes
Date of Annual Data Certification Submission	4/28/23			
Appendix B Requirements - PSD Monitoring - Not Applicable				
Appendix C Requirements - Monitoring Methodology				
Date Sampling Started	01/01/1978	11/1/2012	11/1/2012	11/1/2012
Monitor Type	SLAMS	SLAMS	SLAMS	SLAMS
Monitor Make - Model	Teledyne API – 300T	Teledyne API – 400T	Thermo - TEOM 1405-DF	Thermo - TEOM 1405-DF
Method Code	093	087	208	182
PM Monitor Flow Type	Not Applicable	Not Applicable	Low Volume	Low Volume
PM Monitor Collection Type	Not Applicable	Not Applicable	Dichotomous	Dichotomous
Method Type (FRM, FEM, ARM)	FRM	FEM	FEM	FEM
Appendix D Requirements - Network Design Criteria				
Site Type	Population Exposure	Population Exposure	Population Exposure	Population Exposure
Basic Monitoring Objective	NAAQS Comparison	NAAQS Comparison	NAAQS Comparison	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Monitoring Season	Sep-Mar	Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes	Yes
Appendix E Requirements - Probe and Monitoring Path Siting Criteria				
Distance between collocated samplers	Not Applicable	Not Applicable	Not Applicable	Not Applicable
Distance between PM <sub>10</sub> and PM <sub>2.5</sub> monitors	Not Applicable	Not Applicable	0 meters	0 meters
Probe Height (distance above ground level to inlet)	4.1 meters	4.1 meters	4.7 meters	4.7 meters
Airflow Arc	360°	360°	360°	360°
Probe Sample Line Material	FEP	FEP	Not Applicable	Not Applicable
Pollutant Sample Residence Time (seconds)	5.47	8.12	Not Applicable	Not Applicable
Distance from Supporting Structure/Roof (horizontal distance and	Horizontal	0 meters	0 meters	0 meters
	Vertical	1.5 meters	1.5 meters	2.0 meters

MESA					
vertical distance to probe/inlet)					
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction	no obstruction	no obstruction	no obstruction
	Vertical	no obstruction	no obstruction	no obstruction	no obstruction
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction	no obstruction	no obstruction	no obstruction
	Vertical	no obstruction	no obstruction	no obstruction	no obstruction
Distance from Dripline of Closest Tree(s)		no tree	no tree	no tree	no tree
Distance to Furnace or Flue		No Furnace or Flue	No Furnace or Flue	No Furnace or Flue	No Furnace or Flue
Nearest Major Roadway		Broadway Rd.	Broadway Rd.	Broadway Rd.	Broadway Rd.
Distance and Direction to Road		305 meters, S	305 meters, S	305 meters, S	305 meters, S
Average Daily Traffic Count		23,465	23,465	23,465	23,465
Groundcover		Pavement/Gravel	Pavement/Gravel	Pavement/Gravel	Pavement/Gravel

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## North Phoenix (NP) (04-013-1004)

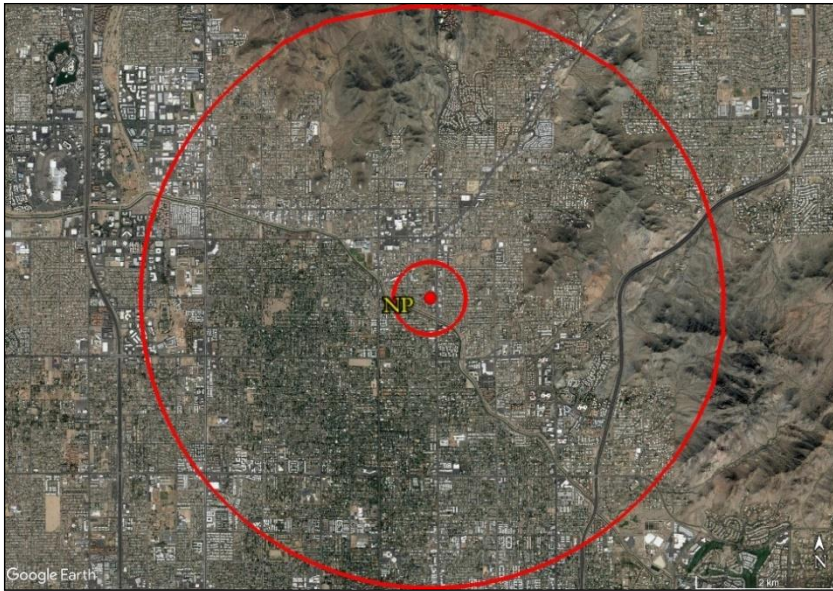

<b>Site Location</b>	7 <sup>th</sup> St. & Butler Ave., Phoenix
<b>Spatial Scale</b>	Neighborhood
<b>Site Type</b>	Population Exposure for PM <sub>10</sub> & PM <sub>2.5</sub> ; Max Concentration for O <sub>3</sub>



**Site Description:** This site began operating in January 1975. This SLAMS location monitors for O<sub>3</sub>, and PM<sub>10</sub>, PM<sub>2.5</sub>. Meteorological monitoring includes ambient temperature, barometric pressure, and wind speed/direction.


<b>NORTH PHOENIX</b>			
County ID: NP AQS ID: 04-013-1004 Address: 601 E Butler Dr., Phoenix Coordinates: 33.56034 N, -112.06627 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa			
<b>General Information</b>			
Pollutant	<b>O<sub>3</sub></b>	<b>PM<sub>10</sub></b>	<b>PM<sub>2.5</sub></b>
Parameter Code	44201	81102	88101
Parameter Occurrence Code	1	1	3
Collection Frequency	Continuous	Continuous	Continuous
Analysis Method (filter samples only)	Not Applicable	Not Applicable	Not Applicable
Any Proposal to Remove or Move Monitor?	No	No	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes	Yes	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS</i> as per §58.30?	Not Applicable	Not Applicable	Yes
Are Data Comparable to Respective NAAQS?	Yes	Yes	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>			
Number of 1-Point QC (Precision) Checks Performed (Gases)	31	Not Applicable	Not Applicable
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly		
Number of Flow Rate Verifications Performed (PM)	Not Applicable	26	26
Frequency of Flow Rate Verifications		Bi-Weekly	Bi-Weekly
Number of PE Audits Performed	2	4	4
Dates of PE Audits	06/05/23 12/06/23	02/13/23 05/09/23 08/03/23 11/07/23	02/13/23 05/09/23 08/03/23 11/07/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes	Yes
Date of Annual Data Certification Submission	4/30/24		
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>			
<b>Appendix C Requirements - Monitoring Methodology</b>			
Date Sampling Started	01/01/1975	9/1/2011	9/1/2011
Monitor Type	SLAMS	SLAMS	SLAMS
Monitor Make - Model	Teledyne API – 400T	Thermo - TEOM 1405- DF	Thermo - TEOM 1405- DF

<b>NORTH PHOENIX</b>				
Method Code		087	208	182
PM Monitor Flow Type		Not Applicable	Low Volume	Low Volume
PM Monitor Collection Type		Not Applicable	Dichotomous	Dichotomous
Method Type (FRM, FEM, ARM)		FEM	FEM	FEM
<b>Appendix D Requirements - Network Design Criteria</b>				
Site Type		Max Ozone Concentration	Population Exposure	Population Exposure
Basic Monitoring Objective		NAAQS Comparison	NAAQS Comparison	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)		Neighborhood	Neighborhood	Neighborhood
Monitoring Season		Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?		Yes	Yes	Yes
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>				
Distance between collocated samplers		Not Applicable	Not Applicable	Not Applicable
Distance between PM <sub>10</sub> and PM <sub>2.5</sub> monitors		Not Applicable	0 meters	0 meters
Probe Height (distance above ground level to inlet)		4.4 meters	4.7 meters	4.7 meters
Airflow Arc		360°	360°	360°
Probe Sample Line Material		FEP	Not Applicable	Not Applicable
Pollutant Sample Residence Time (seconds)		10.37	Not Applicable	Not Applicable
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	1.21 meters	0 meters	0 meters
	Vertical	1.8 meters	2.1 meters	2.1 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction	no obstruction	no obstruction
	Vertical	no obstruction	no obstruction	no obstruction
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	610.01 meters	4.8 meters	4.8 meters
	Vertical	4.5 meters	4.5 meters	4.5 meters
Distance from Dripline of Closest Tree(s)		13.7 meters	10.1 meters	10.1 meters
Distance to Furnace or Flue		No Furnace or Flue	No Furnace or Flue	No Furnace or Flue

<b>NORTH PHOENIX</b>			
Nearest Major Roadway	7 <sup>th</sup> Street	7 <sup>th</sup> Street	7 <sup>th</sup> Street
Distance and Direction to Road	75 meters, E	75 meters, E	75 meters, E
Average Daily Traffic Count (ADT)	18,298	18,298	18,298
Groundcover	Gravel	Gravel	Gravel

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Pinnacle Peak (PP) (04-013-2005)

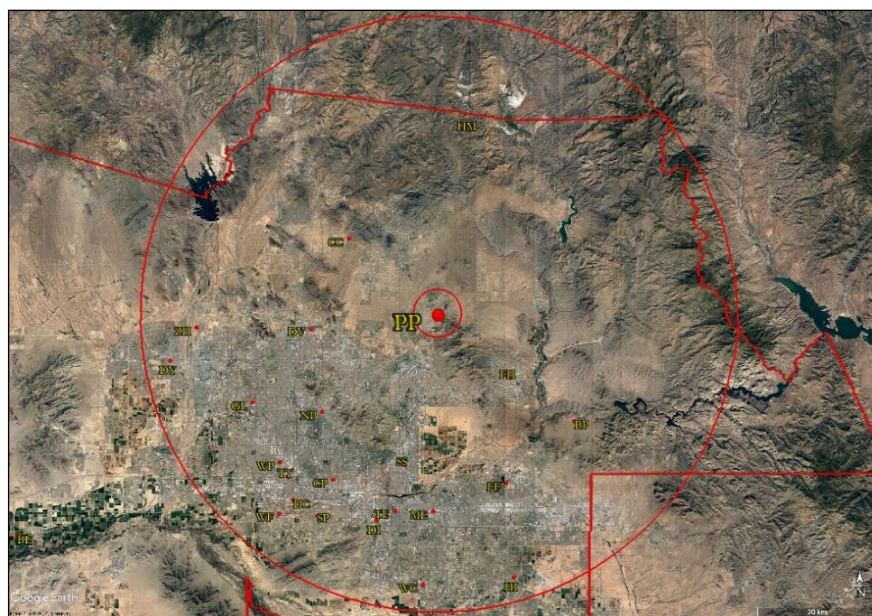

**Site Location** Alma School & Happy Valley Rd., Scottsdale

**Spatial Scale** Urban

**Site Type** Maximum O<sub>3</sub> Concentration



**Site Description:** This site began operating in February 1988. This SLAMS location monitors for O<sub>3</sub> only. Meteorological monitoring includes ambient temperature, barometric pressure, relative humidity, and wind speed/direction.


The site is located approximately 25 miles NE of the Phoenix metropolitan area and represents maximum O<sub>3</sub> concentrations downwind from an urban area. This site measures O<sub>3</sub> concentrations related to the transport of O<sub>3</sub> from central metropolitan Phoenix.

<b>PINNACLE PEAK</b>	
County ID: PP AQS ID: 04-013-2005 Address: 24301 N Alma School Rd., Scottsdale Coordinates: 33.706315 N, -111.856151 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa	
<b>General Information</b>	
Pollutant	<b>O<sub>3</sub></b>
Parameter Code	44201
Parameter Occurrence Code	1
Collection Frequency	Continuous
Analysis Method (filter samples only)	Not Applicable
Any Proposal to Remove or Move Monitor?	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS</i> as per <i>§58.30?</i>	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>	
Number of 1-Point QC (Precision) Checks Performed (Gases)	31
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly
Number of Flow Rate Verifications Performed (PM )	Not Applicable
Frequency of Flow Rate Verifications	
Number of PE Audits Performed	2
Dates of PE Audits	01/10/23 07/11/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes
Date of Annual Data Certification Submission	4/30/24
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>	
<b>Appendix C Requirements - Monitoring Methodology</b>	
Date Sampling Started	02/01/1988
Monitor Type	SLAMS
Monitor Make - Model	Teledyne API – 400T
Method Code	087
Method Type (FRM, FEM, ARM)	FEM
<b>Appendix D Requirements - Network Design Criteria</b>	
Site Type	Max Ozone Concentration
Basic Monitoring Objective	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Urban
Monitoring Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>	
Distance between collocated samplers	Not Applicable

<b>PINNACLE PEAK</b>		
Probe Height (distance above ground level to inlet)		4.2 meters
Airflow Arc		360°
Probe Sample Line Material		FEP
Pollutant Sample Residence Time (seconds)		5.34
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0.1 meters
	Vertical	1.6 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction
	Vertical	no obstruction
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	21.9 meters
	Vertical	4.3 meters
Distance from Dripline of Closest Tree(s)		37.4 meters
Distance to Furnace or Flue		No Furnace or Flue
Nearest Major Roadway		Happy Valley Rd.
Distance and Direction to Road		61 meters, S
Average Daily Traffic Count		16,678
Groundcover		Pavement / Grass

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## South Phoenix (SP) (04-013-4003)

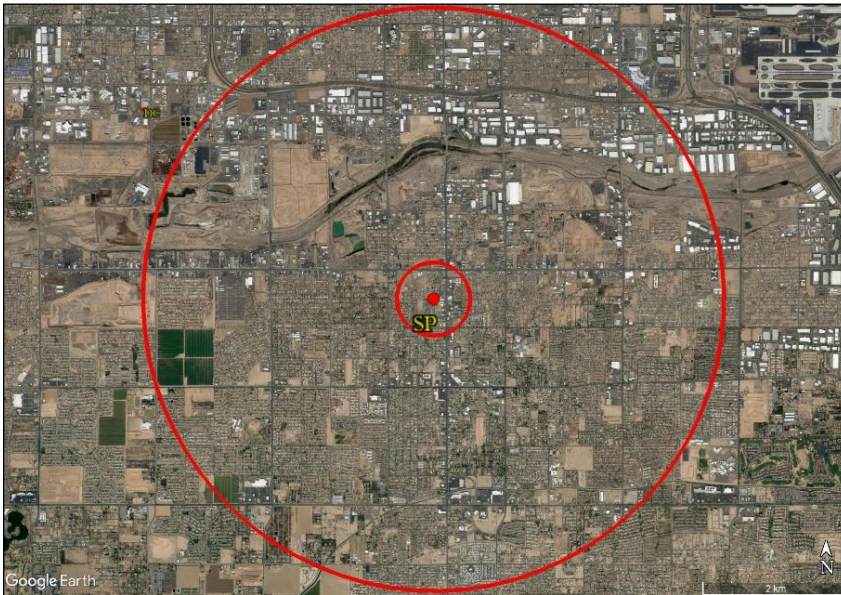

**Site Location** Central Ave. & Broadway Rd., Phoenix

**Spatial Scale** Neighborhood

**Site Type** Population Exposure



**Site Description:** The site began operating in October 1999. This SLAMS location monitors for CO, O<sub>3</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub>. Meteorological monitoring includes ambient temperature, barometric pressure, relative humidity, and wind speed/direction.

The site borders a mixture of high population density residential and commercial properties.

**SOUTH PHOENIX**

County ID: SP  
 AQS ID: 04-013-4003  
 Address: 33 W Tamarisk St., Phoenix  
 Coordinates: 33.40314 N, -112.07526 W  
 Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa

**General Information**

Pollutant	CO	O <sub>3</sub>	PM <sub>10</sub>	PM <sub>2.5</sub>
Parameter Code	42101	44201	81102	88101
Parameter Occurrence Code	1	1	1	3
Collection Frequency	Continuous	Continuous	Continuous	Continuous
Analysis Method (filter samples only)	Not Applicable	Not Applicable	Not Applicable	Not Applicable
Any Proposal to Remove or Move Monitor?	No	No	No	No
Does monitor operation meet 40 CFR Part 58, Subpart G – Appendices A, C, D, and E?	Yes	Yes	Yes	Yes
Is site suitable for comparison to the annual PM <sub>2.5</sub> NAAQS as per §58.30?	Not Applicable	Not Applicable	Not Applicable	Yes
Are Data Comparable to Respective NAAQS?	Yes	Yes	Yes	Yes

**Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs**

Number of 1-Point QC (Precision) Checks Performed (Gases)	30	31	Not Applicable	Not Applicable
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly	Bi-Weekly		
Number of Flow Rate Verifications Performed (PM)	Not Applicable	Not Applicable	26	26
Frequency of Flow Rate Verifications			Bi-Weekly	Bi-Weekly
Number of PE Audits Performed	2	2	4	4
Dates of PE Audits	03/13/23 10/03/23	04/04/23 11/15/23	02/21/23 05/04/23 08/07/23 11/15/23	02/21/23 05/04/23 08/07/23 11/15/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes	Yes	Yes


SOUTH PHOENIX					
Date of Annual Data Certification Submission		4/30/24			
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>					
<b>Appendix C Requirements - Monitoring Methodology</b>					
Date Sampling Started	10/01/1999	10/01/1999	7/1/2007	05/01/2010	
Monitor Type	SLAMS	SLAMS	SLAMS	SLAMS	
Monitor Make - Model	Teledyne API – 300T	Teledyne API – 400T	Thermo - TEOM 1405-DF	Thermo - TEOM 1405-DF	
Method Code	093	087	208	182	
PM Monitor Flow Type	Not Applicable	Not Applicable	Low Volume	Low Volume	
PM Monitor Collection Type	Not Applicable	Not Applicable	Dichotomous	Dichotomous	
Method Type (FRM, FEM, ARM)	FRM	FEM	FEM	FEM	
<b>Appendix D Requirements - Network Design Criteria</b>					
Site Type	Population Exposure	Population Exposure	Population Exposure	Population Exposure	
Basic Monitoring Objective	NAAQS Comparison	NAAQS Comparison	NAAQS Comparison	NAAQS Comparison	
Monitoring Scale (Spatial Scale Represented)	Neighborhood	Neighborhood	Neighborhood	Neighborhood	
Monitoring Season	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec	
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes	Yes	
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>					
Distance between collocated samplers	Not Applicable	Not Applicable	Not Applicable	Not Applicable	
Distance between PM <sub>10</sub> and PM <sub>2.5</sub> monitors	Not Applicable	Not Applicable	0 meters	0 meters	
Probe Height (distance above ground level to inlet)	5.2 meters	5.2 meters	4.2 meters	4.2 meters	
Airflow Arc	360°	360°	360°	360°	
Probe Sample Line Material	FEP	FEP	Not Applicable	Not Applicable	
Pollutant Sample Residence Time (seconds)	4.37	5.29	Not Applicable	Not Applicable	
	Horizontal	0.3 meters	0.3 meters	0 meters	0 meters

SOUTH PHOENIX					
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Vertical	2.0 meters	2.0 meters	3.0 meters	3.0 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction	no obstruction	no obstruction	no obstruction
	Vertical	no obstruction	no obstruction	no obstruction	no obstruction
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	21.0 meters	21.0 meters	2.4 meters	2.4 meters
	Vertical	0 meters	0 meters	0.6 meters	0.6 meters
Distance from Dripline of Closest Tree(s)		10.9 meters	10.9 meters	7.3 meters*	7.3 meters*
Distance to Furnace or Flue		No Furnace or Flue	No Furnace or Flue	No Furnace or Flue	No Furnace or Flue
Nearest Major Roadway A		Central Ave.	Central Ave.	Central Ave.	Central Ave.
Distance and Direction to Road		168 meters, E	168 meters, E	165 meters, E	165 meters, E
Average Daily Traffic Count		23,399	23,399	23,399	23,399
Nearest Major Roadway B		Broadway Rd.	Broadway Rd.	Broadway Rd.	Broadway Rd.
Distance and Direction to Road		385 meters, N	385 meters, N	385 meters, N	385 meters, N
Average Daily Traffic Count		20,051	20,051	20,051	20,051
Groundcover		Pavement	Pavement	Pavement	Pavement

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

\* MCAQD is aware that these measurements do not meet siting requirements. The trees closest to the monitor inlets are not on MCAQD property. MCAQD is working with property owners to change the situation to move make adjustments to achieve compliance.

## South Scottsdale (SS) (04-013-3003)

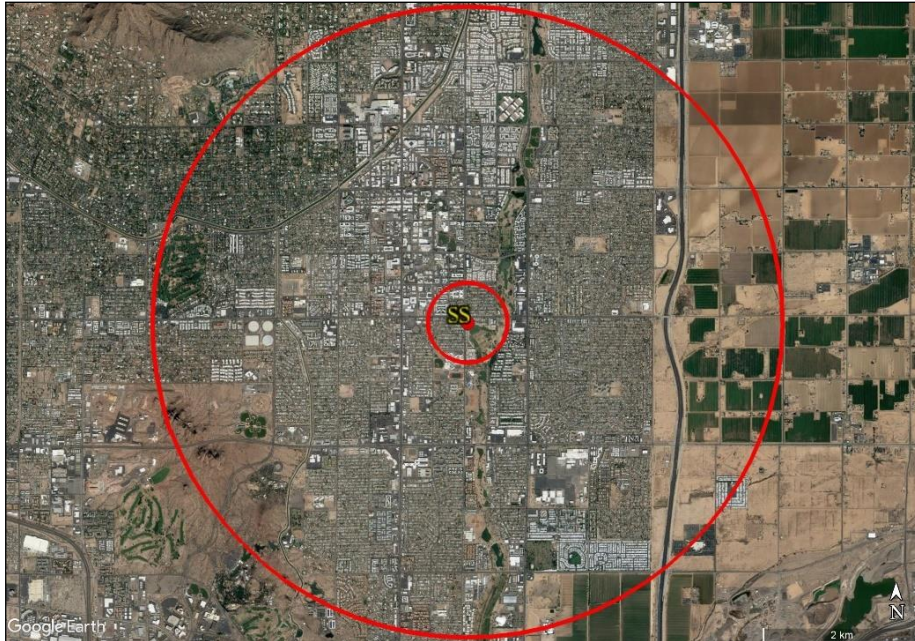

<b>Site Location</b>	Thomas Rd. & Miller Rd., Scottsdale
<b>Spatial Scale</b>	Neighborhood
<b>Site Type</b>	Population Exposure



**Site Description:** This site began operating in January 1974. This SLAMS location monitors for  $O_3$  and  $PM_{10}$ . Meteorological monitoring includes ambient temperature, barometric pressure, relative humidity, and wind speed/direction.

The station is in a residential area.


<b>SOUTH SCOTTSDALE</b>		
County ID: SS AQS ID: 04-013-3003 Address: 2857 N Miller Rd., Scottsdale Coordinates: 33.47968 N, -111.91711 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa		
<b>General Information</b>		
Pollutant	<b>O<sub>3</sub></b>	<b>PM<sub>10</sub></b>
Parameter Code	44201	81102
Parameter Occurrence Code	1	1
Collection Frequency	Continuous	Continuous
Analysis Method (filter samples only)	Not Applicable	Not Applicable
Any Proposal to Remove or Move Monitor?	Yes	Yes
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS as per §58.30?</i>	Not Applicable	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>		
Number of 1-Point QC (Precision) Checks Performed (Gases)	30	Not Applicable
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly	
Number of Flow Rate Verifications Performed (PM)	Not Applicable	27
Frequency of Flow Rate Verifications		Bi-Weekly
Number of PE Audits Performed	2	4
Dates of PE Audits	01/05/23 07/05/23	02/02/23 05/08/23 08/02/23 11/08/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes
Date of Annual Data Certification Submission	4/30/24	
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>		
<b>Appendix C Requirements - Monitoring Methodology</b>		
Date Sampling Started	01/01/1974	09/01/2012
Monitor Type	SLAMS	SLAMS
Monitor Make - Model	Teledyne API – 400T	Thermo - TEOM 1405-S
Method Code	087	079
PM Monitor Flow Type	Not Applicable	Low Volume
PM Monitor Collection Type	Not Applicable	Size Specific
Method Type (FRM, FEM, ARM)	FEM	FEM
<b>Appendix D Requirements - Network Design Criteria</b>		

SOUTH SCOTTSDALE			
Site Type		Population Exposure	Population Exposure
Basic Monitoring Objective		NAAQS Comparison	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)		Neighborhood	Neighborhood
Monitoring Season		Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?		Yes	Yes
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>			
Distance between collocated samplers		Not Applicable	Not Applicable
Probe Height (distance above ground level to inlet)		5.1 meters	6.1 meters
Airflow Arc		360°	360°
Probe Sample Line Material		FEP	Not Applicable
Pollutant Sample Residence Time (seconds)		8.43	Not Applicable
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0.46 meters	0 meters
	Vertical	1.9 meters	6.1 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction	no obstruction
	Vertical	no obstruction	no obstruction
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	16.4 meters	24.6 meters
	Vertical	0 meters	0 meters
Distance from Dripline of Closest Tree(s)		2.9 meters*	8.2 meters*
Distance to Furnace or Flue		No Furnace or Flue	No Furnace or Flue
Nearest Major Roadway A		Thomas Rd.	Thomas Rd.
Distance and Direction to Road		66 meters, N	62 meters, N
Average Daily Traffic Count		34,583	34,583
Nearest Major Roadway B		Miller Rd.	Miller Rd.
Distance and Direction to Road		32 meters, W	35 meters, W
Average Daily Traffic Count		19,590	19,590
Groundcover		Pavement	Pavement

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

\* MCAQD is aware that these measurements do not meet siting requirements. The proposed change to this monitoring location will address the dripline measurement.

## Tempe (TE) (04-013-4005)

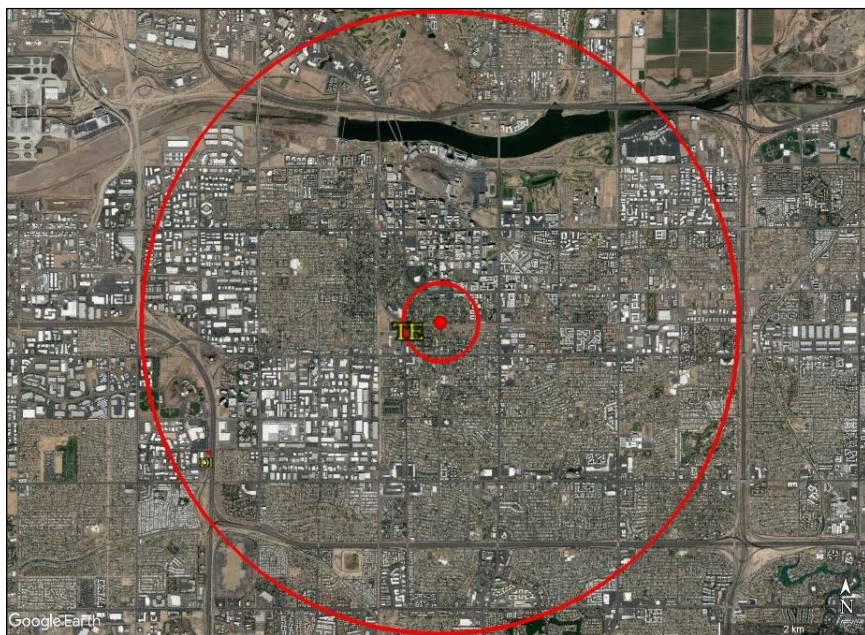

**Site Location** Apache Blvd. & College Ave., Tempe

**Spatial Scale** Neighborhood

**Site Type** Population Exposure



**Site Description:** This site began operating in 2000. This SLAMS location monitors for  $O_3$ ,  $PM_{10}$ , and  $PM_{2.5}$ . Meteorological monitoring includes ambient temperature, rain, and wind speed/direction.

The station is near the ASU Tempe Campus and surrounded by residential homes, high-density residential properties, and a railroad track.

<b>TEMPE</b>			
County ID: TE			
AQS ID: 04-013-4005			
Address: 1525 S College Ave., Tempe			
Coordinates: 33.4123 N, -111.93471 W			
Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa			
<b>General Information</b>			
Pollutant	<b>O<sub>3</sub></b>	<b>PM<sub>10</sub></b>	<b>PM<sub>2.5</sub></b>
Parameter Code	44201	81102	88101
Parameter Occurrence Code	1	1	3
Collection Frequency	Continuous	Continuous	Continuous
Analysis Method (filter samples only)	Not Applicable	Not Applicable	Not Applicable
Any Proposal to Remove or Move Monitor?	No	No	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes	Yes	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS</i> as per §58.30?	Not Applicable	Not Applicable	Yes
Are Data Comparable to Respective NAAQS?	Yes	Yes	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>			
Number of 1-Point QC (Precision) Checks Performed (Gases)	31	Not Applicable	Not Applicable
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly		
Number of Flow Rate Verifications Performed (PM)	Not Applicable	26	26
Frequency of Flow Rate Verifications	Applicable	Bi-Weekly	Bi-Weekly
Number of PE Audits Performed	2	4	4
Dates of PE Audits	05/04/23 11/14/23	02/27/23 05/04/23 08/08/23 11/14/23	02/27/23 05/04/23 08/08/23 11/14/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes	Yes
Date of Annual Data Certification Submission	4/30/24		
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>			
<b>Appendix C Requirements - Monitoring Methodology</b>			
Date Sampling Started	07/01/2000	03/01/2012	03/01/2012
Monitor Type	SLAMS	SLAMS	SLAMS
Monitor Make - Model	Teledyne API – 400T	Thermo - TEOM 1405-DF	Thermo - TEOM 1405-DF

TEMPE				
Method Code		087	208	182
PM Monitor Flow Type		Not Applicable	Low Volume	Low Volume
PM Monitor Collection Type		Not Applicable	Dichotomous	Dichotomous
Method Type (FRM, FEM, ARM)		FEM	FEM	FEM
Appendix D Requirements - Network Design Criteria				
Site Type		Population Exposure	Population Exposure	Population Exposure
Basic Monitoring Objective		NAAQS Comparison	NAAQS Comparison	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)		Neighborhood	Neighborhood	Neighborhood
Monitoring Season		Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?		Yes	Yes	Yes
Appendix E Requirements - Probe and Monitoring Path Siting Criteria				
Distance between collocated samplers		Not Applicable	Not Applicable	Not Applicable
Distance between PM <sub>10</sub> and PM <sub>2.5</sub> monitors		Not Applicable	0 meters	0 meters
Probe Height (distance above ground level to inlet)		4.2 meters	4.7 meters	4.7 meters
Airflow Arc		360°	360°	360°
Probe Sample Line Material		FEP	Not Applicable	Not Applicable
Pollutant Sample Residence Time (seconds)		5.89	Not Applicable	Not Applicable
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0.1 meters	0 meters	0 meters
	Vertical	1.5 meters	2.1 meters	2.1 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction	no obstruction	no obstruction
	Vertical	no obstruction	no obstruction	no obstruction
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	5.4 meters	8.2 meters	8.2 meters
	Vertical	0 meters	0 meters	0 meters
Distance from Dripline of Closest Tree(s)		10.0 meters	10.0 meters	10.0 meters
Distance to Furnace or Flue		No Furnace or Flue	No Furnace or Flue	No Furnace or Flue

TEMPE			
Nearest Major Roadway	Broadway Rd.	Broadway Rd.	Broadway Rd.
Distance and Direction to Road	370 meters, S	370 meters, S	370 meters, S
Average Daily Traffic Count	24,184	24,184	24,184
Groundcover	Gravel	Gravel	Gravel

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Thirty-Third (TT) (04-013-4020)

<b>Site Location</b>	Interstate-10 & 33 <sup>rd</sup> Ave., Phoenix
<b>Spatial Scale</b>	Micro
<b>Site Type</b>	Source-Oriented



**Site Description:** This site began operating in September 2015. This SLAMS location monitors for NO<sub>2</sub>; and temporarily monitored for CO and PM<sub>2.5</sub> from January 2020 through February 2021. CO and PM<sub>2.5</sub> were removed from the Thirty-Third site and relocated to the new Eastwood site in March 2021. Meteorological monitoring includes ambient temperature, barometric pressure, relative humidity, and wind speed/direction.

The site is one of two near-road air monitoring sites and is located on the south side embankment adjacent to the I-10 and oriented on an east-west section of the highway, midway downslope from 33<sup>rd</sup> Avenue toward the I-10.

**THIRTY-THIRD**

County ID: TT  
 AQS ID: 04-013-4020  
 Address: 3248 W Moreland Ave., Phoenix  
 Coordinates: 33.46173 N, -112.12796 W  
 Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa

**General Information**

Pollutant	<b>NO<sub>2</sub></b>
Parameter Code	42602
Parameter Occurrence Code	1
Collection Frequency	Continuous
Analysis Method (filter samples only)	Not Applicable
Any Proposal to Remove or Move Monitor?	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS</i> as per §58.30?	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes

**Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs**

Number of 1-Point QC (Precision) Checks Performed (Gases)	30
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly
Number of Flow Rate Verifications (PM)	Not Applicable
Frequency of Flow Rate Verifications	
Number of PE Audits Performed	2
Dates of PE Audits	05/16/23 11/20/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes
Date of Annual Data Certification Submission	4/30/24

**Appendix B Requirements - PSD Monitoring - Not Applicable****Appendix C Requirements - Monitoring Methodology**

Date Sampling Started	09/01/2015
Monitor Type	SLAMS
Monitor Make – Model	Thermo 42iQ
Method Code	074
Method Type (FRM, FEM, ARM)	FRM

**Appendix D Requirements - Network Design Criteria**

Site Type	Source-Oriented
Basic Monitoring Objective	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Micro
Monitoring Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes

**Appendix E Requirements - Probe and Monitoring Path Siting Criteria**

Distance between collocated samplers	Not Applicable
Probe Height (distance above ground level to inlet)	11.8 meters
Airflow Arc	360°

THIRTY-THIRD		
Probe Sample Line Material		FEP
Pollutant Sample Residence Time (seconds)		15.08
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	4.5 meters
	Vertical	0 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction
	Vertical	no obstruction
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction
	Vertical	no obstruction
Distance from Dripline of Closest Tree(s)		18.3 meters
Distance to Furnace or Flue		No Furnace or Flue
Nearest Major Roadway		I-10
Distance and Direction to Road		13.5 meters, N
Average Daily Traffic Count		249,514
Groundcover		Gravel

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## West 43<sup>rd</sup> Avenue (WF) (04-013-4009)



<b>Site Location</b>	43 <sup>rd</sup> Ave. & Broadway Rd., Phoenix
<b>Spatial Scale</b>	Middle
<b>Site Type</b>	Highest Concentration



**Site Description:** This site began operating in April 2002. This SLAMS location monitors for PM<sub>10</sub>. Meteorological monitoring includes ambient temperature, barometric pressure, and wind speed/direction.


The site is located near a combination of heavy industrial operations and residential homes to measure maximum PM<sub>10</sub> concentrations. The sources around the site include sand and gravel operations, automobile and metal recycling facilities, landfills, paved and unpaved haul roads, and cement casting.

<b>WEST 43<sup>RD</sup> AVENUE</b>	
County ID: WF AQS ID: 04-013-4009 Address: 3940 W Broadway Rd., Phoenix Coordinates: 33.40635 N, -112.14426 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa	
<b>General Information</b>	
Pollutant	<b>PM<sub>10</sub></b>
Parameter Code	81102
Parameter Occurrence Code	1
Collection Frequency	Continuous
Analysis Method (filter samples only)	Not Applicable
Any Proposal to Remove or Move Monitor?	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes
Is site suitable for comparison to the <i>annual PM<sub>2.5</sub> NAAQS</i> as per <i>§58.30?</i>	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>	
Number of 1-Point QC (Precision) Checks Performed (Gases)	Not Applicable
Frequency of 1-Point QC (Precision) Checks	
Number of Flow Rate Verifications Performed (PM)	26
Frequency of Flow Rate Verifications	Bi-Weekly
Number of PE Audits Performed	4
Dates of PE Audits	03/21/23 06/07/23 09/13/23 12/19/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes
Date of Annual Data Certification Submission	4/30/24
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>	
<b>Appendix C Requirements - Monitoring Methodology</b>	
Date Sampling Started	04/01/2002
Monitor Type	SLAMS
Monitor Make – Model	Thermo - TEOM 1405-S
Method Code	079
PM Monitor Flow Type	Low Volume
PM Monitor Collection Type	Size Specific
Method Type (FRM, FEM, ARM)	FEM
<b>Appendix D Requirements - Network Design Criteria</b>	
Site Type	Highest Concentration
Basic Monitoring Objective	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Middle

<b>WEST 43<sup>RD</sup> AVENUE</b>		
Monitoring Season	Jan-Dec	
Network Meets Minimum Number of Monitors Required?	Yes	
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>		
Distance between collocated samplers	Not Applicable	
Probe Height (distance above ground level to inlet)	4.6 meters	
Airflow Arc	360°	
Probe Sample Line Material	Not Applicable	
Pollutant Sample Residence Time (seconds)	Not Applicable	
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0 meters
	Vertical	1.9 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction
	Vertical	no obstruction
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	13.7 meters
	Vertical	0 meters
Distance from Dripline of Closest Tree(s)	20.1 meters	
Distance to Furnace or Flue	No Furnace or Flue	
Nearest Major Roadway A	Broadway Rd. (E of 35 <sup>th</sup> Ave.)	
Distance and Direction to Road	37 meters, S	
Average Daily Traffic Count	12,501	
Nearest Major Roadway B	35 <sup>th</sup> Ave. (N. of Broadway Rd.)	
Distance and Direction to Road	1 kilometer, E	
Average Daily Traffic Count	28,398	
Groundcover	Gravel	

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## West Chandler (WC) (04-013-4004)

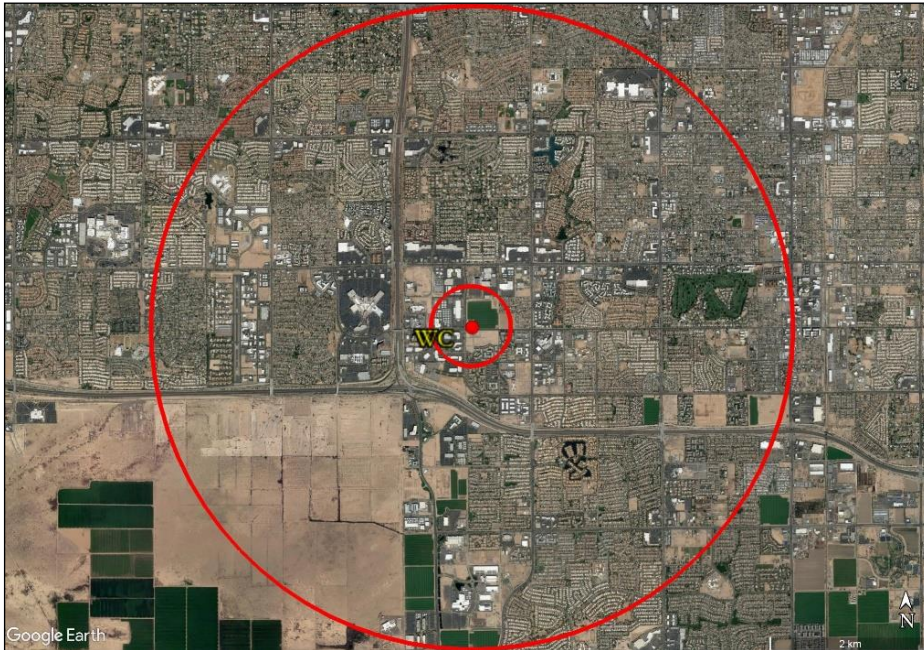

<b>Site Location</b>	Frye Rd. & Ellis St., Chandler
<b>Spatial Scale</b>	Neighborhood
<b>Site Type</b>	Population Exposure



**Site Description:** This site began operating in January 1995, This SLAMS location monitors for CO, O<sub>3</sub>, and PM<sub>10</sub>. Meteorological monitoring includes ambient temperature, barometric pressure, relative humidity, and wind speed/direction.

The site is surrounded by residential, agricultural, and heavy industrial operations, such as semiconductor manufacturing plants and liquid air storage. The PM<sub>10</sub> monitor's scale of representativeness was first established as middle scale, but it was changed to neighborhood in June 2019 to better reflect land use currently surrounding the site.


<b>WEST CHANDLER</b>			
County ID: WC			
AQS ID: 04-013-4004			
Address: 275 S Ellis, Chandler			
Coordinates: 33.29896 N, -111.88426 W			
Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa			
<b>General Information</b>			
Pollutant	<b>CO</b>	<b>O<sub>3</sub></b>	<b>PM<sub>10</sub></b>
Parameter Code	42101	44201	81102
Parameter Occurrence Code	1	1	1
Collection Frequency	Continuous	Continuous	Continuous
Analysis Method (filter samples only)	Not Applicable	Not Applicable	Not Applicable
Any Proposal to Remove or Move Monitor?	No	No	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes	Yes	Yes
Is site suitable for comparison to the <i>annual PM2.5 NAAQS as per §58.30?</i>	Not Applicable	Not Applicable	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes	Yes	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>			
Number of 1-Point QC (Precision) Checks Performed (Gases)	32	32	Not Applicable
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly	Bi-Weekly	
Number of Flow Rate Verifications Performed (PM)	Not Applicable	Not Applicable	29
Frequency of Flow Rate Verifications			Bi-Weekly
Number of PE Audits Performed	2	2	4
Dates of PE Audits	03/06/23 09/07/23	04/11/23 10/16/23	03/07/23 06/14/23 09/07/23 12/11/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes	Yes
Date of Annual Data Certification Submission	4/30/24		
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>			
<b>Appendix C Requirements - Monitoring Methodology</b>			
Date Sampling Started	07/01/2000	07/01/2000	07/01/2000
Monitor Type	SLAMS	SLAMS	SLAMS
Monitor Make - Model	Teledyne API – 300T	Teledyne API – 400T	Thermo – TEOM 1405-S
Method Code	093	087	079
PM Monitor Flow Type	Not Applicable	Not Applicable	Low Volume

WEST CHANDLER				
PM Monitor Collection Type		Not Applicable	Not Applicable	Size Specific
Method Type (FRM, FEM, ARM)		FRM	FEM	FEM
Appendix D Requirements - Network Design Criteria				
Site Type		Population Exposure	Population Exposure	Population Exposure
Basic Monitoring Objective		NAAQS Comparison	NAAQS Comparison	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)		Neighborhood	Neighborhood	Neighborhood
Monitoring Season		Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?		Yes	Yes	Yes
Appendix E Requirements - Probe and Monitoring Path Siting Criteria				
Distance between collocated samplers		Not Applicable	Not Applicable	Not Applicable
Probe Height (distance above ground level to inlet)		4.5 meters	4.5 meters	4.7 meters
Airflow Arc		360°	360°	360°
Probe Sample Line Material		FEP	FEP	Not Applicable
Pollutant Sample Residence Time (seconds)		4.14	4.24	Not Applicable
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0.4 meters	0.4 meters	0 meters
	Vertical	1.4 meters	1.4 meters	1.6 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction	no obstruction	no obstruction
	Vertical	no obstruction	no obstruction	no obstruction
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	14 meters	14 meters	14 meters
	Vertical	3 meters	3 meters	3 meters
Distance from Dripline of Closest Tree(s)		10.0 meters	10.0 meters	11.9 meters
Distance to Furnace or Flue		No Furnace or Flue	No Furnace or Flue	No Furnace or Flue
Nearest Major Roadway A		Frye Rd.	Frye Rd.	Frye Rd.
Distance and Direction to Road		30 meters, S	30 meters, S	30 meters, S
Average Daily Traffic Count		20,494	20,494	20,494

WEST CHANDLER			
Groundcover	Pavement / Gravel	Pavement / Gravel	Pavement / Gravel

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## West Phoenix (WP) (04-013-0019)

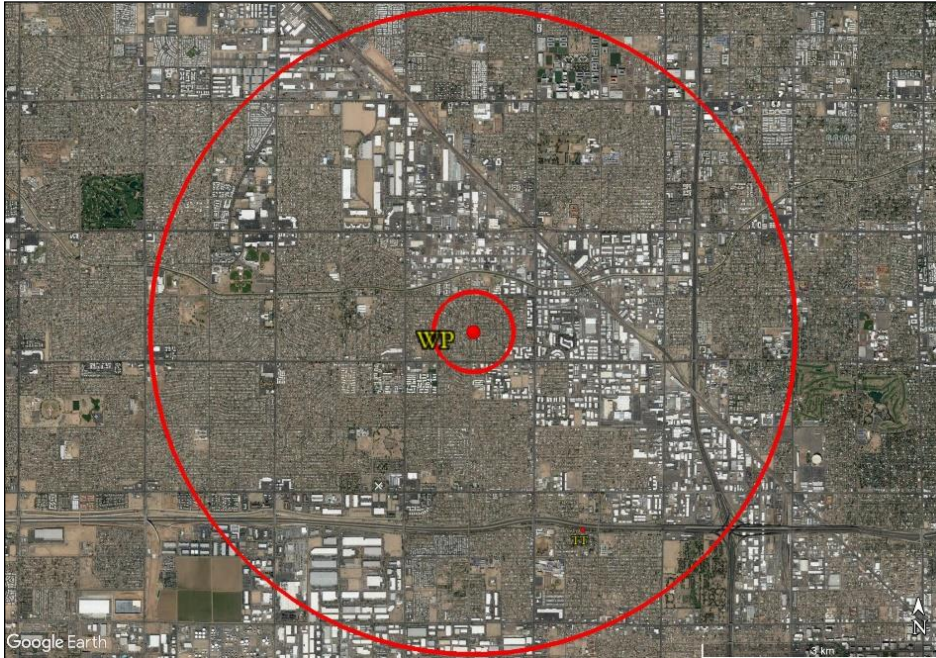

<b>Site Location</b>	39 <sup>th</sup> Ave. & Earll Dr., Phoenix
<b>Spatial Scale</b>	Neighborhood
<b>Site Type</b>	Population Exposure for CO, NO <sub>2</sub> , O <sub>3</sub> , PM <sub>10</sub> , and Highest Concentration for PM <sub>2.5</sub>



**Site Description:** This site began operating in January 1984. This SLAMS location monitors for CO, NO<sub>2</sub>, O<sub>3</sub>, PM<sub>10</sub>, and PM<sub>2.5</sub>. Meteorological monitoring includes ambient temperature, barometric pressure, and wind speed/direction. The site is in an area of stable, high-density, residential properties. This is the QA collocation site for PM<sub>2.5</sub> where one filter based PM<sub>2.5</sub> FRM sampler operates alongside a continuous PM<sub>2.5</sub> FEM analyzer as per 40 CFR Part 58 Appendix A.

**WEST PHOENIX**

County ID: WP  
 AQS ID: 04-013-0019  
 Address: 3847 W Earll, Phoenix  
 Coordinates: 33.48378 N, -112.14256 W  
 Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa

**General Information**

Pollutant	CO	NO <sub>2</sub>	O <sub>3</sub>	PM <sub>10</sub>	PM <sub>2.5</sub> Primary	PM <sub>2.5</sub> Secondary
Parameter Code	42101	42602	44201	81102	88101	88101
Parameter Occurrence Code	1	1	1	1	3	2
Collection Frequency	Continuous	Continuous	Continuous	Continuous	Continuous	1 in 12 days
Analysis Method (filter samples only)	Not Applicable	Not Applicable	Not Applicable	Not Applicable	Not Applicable	<i>As per 40 CFR Part 50, Appendix L</i>
Analytical Laboratory (filter samples only)	Not Applicable	Not Applicable	Not Applicable	Not Applicable	Not Applicable	Pace Analytical® IML Air Science Laboratory
Any Proposal to Remove or Move Monitor?	No	No	No	No	No	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes	Yes	Yes	Yes	Yes	Yes
Is site suitable for comparison to the <i>annual</i>	Not Applicable	Not Applicable	Not Applicable	Not Applicable	Yes	Yes

PM2.5 NAAQS as per §58.30?						
Are Data Comparable to Respective NAAQS?	Yes	Yes	Yes	Yes	Yes	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>						
Number of 1-Point QC (Precision) Checks Performed (Gases)	35	31	32	Not Applicable	Not Applicable	Not Applicable
Frequency of 1-Point QC (Precision) Checks	Bi-Weekly	Bi-Weekly	Bi-Weekly			
Number of Flow Rate Verifications Performed (PM)	Not Applicable	Not Applicable	Not Applicable	26	26	12
Frequency of Flow Rate Verifications				Bi-Weekly	Bi-Weekly	Monthly
Number of Required Collocated Assessments (PM <sub>2.5</sub> Only)	Not Applicable	Not Applicable	Not Applicable	Not Applicable	30	
Number of Valid Collocation Assessments (PM <sub>2.5</sub> Only)	Not Applicable	Not Applicable	Not Applicable	Not Applicable	30	
Number of Collocation Assessments in 2021 (PM <sub>2.5</sub> Only)	Not Applicable	Not Applicable	Not Applicable	Not Applicable	30	
Number of PE Audits Performed in 2021	2	2	2	4	4	4
Dates of PE Audits	06/07/23 12/05/23	03/21/23 09/12/23	01/04/23 07/06/23	03/21/23 06/07/23 09/12/23 12/05/23	03/21/23 06/07/23 09/12/23 12/05/23	03/29/23 06/07/23 09/13/23 12/05/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes	Yes	Yes	Yes	Yes	Yes


Date of Annual Data Certification Submission	04/30/22					
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>						
<b>Appendix C Requirements - Monitoring Methodology</b>						
Date Sampling Started	01/01/1984	05/24/1990	01/01/1984	02/01/1988	09/01/2005	06/13/2000
Monitor Type	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS
Monitor Make - Model	Thermo 48iq	Thermo 42iq	Thermo 49iq	Thermo - TEOM 1405-DF	Thermo - TEOM 1405-DF	Thermo - Partisol 2025
<i>Notes: The same monitor collects PM<sub>10</sub> and PM<sub>2.5</sub> hourly (continuous) measurements. The collocated Partisol 2025i sampler collects a QA filter sample once every 12 days.</i>						
Method Code	54	74	47	208	182	145
PM Monitor Flow Type	Not Applicable	Not Applicable	Not Applicable	Low Volume	Low Volume	Low Volume
PM Monitor Collection Type	Not Applicable	Not Applicable	Not Applicable	Dichotomous	Dichotomous	Size Specific & Sequential
Method Type (FRM, FEM, ARM)	FRM	FRM	FEM	FEM	FEM	FRM
<b>Appendix D Requirements - Network Design Criteria</b>						
Site Type	Population Exposure	Population Exposure	Population Exposure	Population Exposure	Highest Concentration	Highest Concentration
Basic Monitoring Objective	NAAQS Comparison	NAAQS Comparison	NAAQS Comparison	NAAQS Comparison	NAAQS Comparison	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Neighborhood	Neighborhood	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Monitoring Season	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes	Yes	Yes	Yes
<b>Appendix E Requirements - Probe and Monitoring Path Siting Criteria</b>						



Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstruction	no obstruction	no obstruction	no obstruction	no obstruction	no obstruction
	Vertical	no obstruction	no obstruction	no obstruction	no obstruction	no obstruction	no obstruction
Distance from Dripline of Closest Tree(s)		no tree	no tree	no tree	no tree	no tree	no tree
Distance to Furnace or Flue		No Furnace or Flue	No Furnace or Flue	No Furnace or Flue	No Furnace or Flue	No Furnace or Flue	No Furnace or Flue
Nearest Major Roadway		Thomas Rd.	Thomas Rd.	Thomas Rd.	Thomas Rd.	Thomas Rd.	Thomas Rd.
Distance and Direction to Road		360 meters, S	360 meters, S	360 meters, S	360 meters, S	360 meters, S	360 meters, S
Average Daily Traffic Count		29,000	29,000	29,000	29,000	29,000	29,000
Groundcover		Gravel	Gravel	Gravel	Gravel	Gravel	Gravel

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## Zuni Hills (ZH) (04-013-4016)

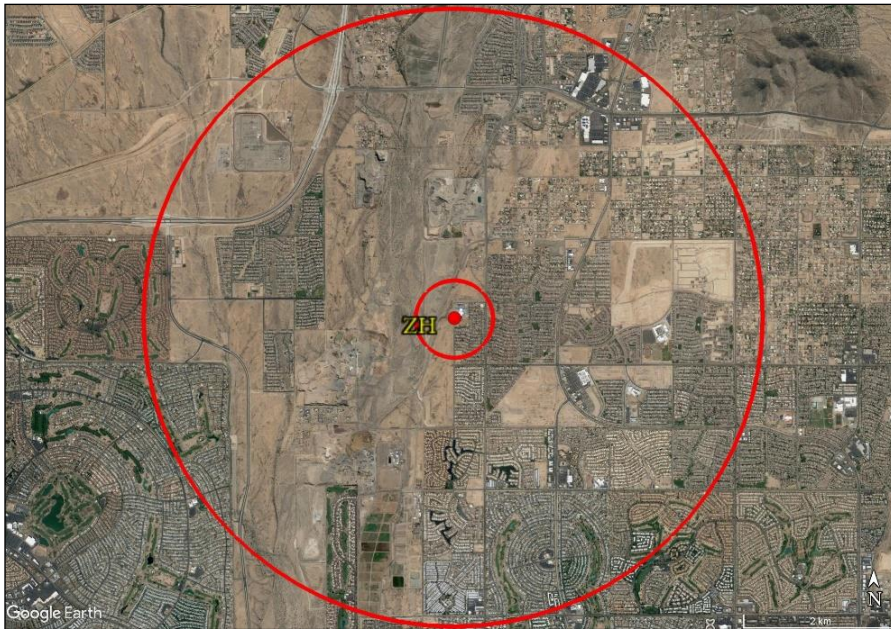

<b>Site Location</b>	109 <sup>th</sup> Ave. & Deer Valley Rd., Phoenix
<b>Spatial Scale</b>	Neighborhood
<b>Site Type</b>	Population Exposure



**Site Description:** This site began operating in December 2009. This SLAMS location monitors for PM<sub>10</sub>. Meteorological monitoring includes ambient temperature and wind speed/direction.

The station is located on the campus of the Zuni Hills Elementary School.

<b>ZUNI HILLS</b>	
County ID: ZH AQS ID: 04-013-4016 Address: 10851 W Williams Rd., Sun City Coordinates: 33.68719 N, -112.29416 W Metropolitan Statistical Area (MSA): 6200 Phoenix-Mesa	
<b>General Information</b>	
Pollutant	<b>PM<sub>10</sub></b>
Parameter Code	81102
Parameter Occurrence Code	1
Collection Frequency	Continuous
Analysis Method (filter samples only)	Not Applicable
Any Proposal to Remove or Move Monitor?	No
Does monitor operation meet <i>40 CFR Part 58, Subpart G – Appendices A, C, D, and E?</i>	Yes
Is site suitable for comparison to the <i>annual</i> PM <sub>2.5</sub> NAAQS as per §58.30?	Not Applicable
Are Data Comparable to Respective NAAQS?	Yes
<b>Appendix A Requirements - Quality Assurance Requirements for SLAMS and SPMs</b>	
Number of 1-Point QC (Precision) Checks Performed (Gases)	Not Applicable
Frequency of 1-Point QC (Precision) Checks	
Number of Flow Rate Verifications Performed (PM)	26
Frequency of Flow Rate Verifications	Bi-Weekly
Number of PE Audits Performed	4
Dates of PE Audits	03/06/23 06/12/23 09/05/23 12/14/23
Annual Precision & PE Audit Reports Submitted to AQS?	Yes
Date of Annual Data Certification Submission	4/30/24
<b>Appendix B Requirements - PSD Monitoring - Not Applicable</b>	
<b>Appendix C Requirements - Monitoring Methodology</b>	
Date Sampling Started	12/01/2009
Monitor Type	SLAMS
Monitor Make – Model	Thermo - TEOM 1405-S
Method Code	079
PM Monitor Flow Type	Low Volume
PM Monitor Collection Type	Size Specific
Method Type (FRM, FEM, ARM)	FEM
<b>Appendix D Requirements - Network Design Criteria</b>	
Site Type	Population Exposure
Basic Monitoring Objective	NAAQS Comparison
Monitoring Scale (Spatial Scale Represented)	Neighborhood

ZUNI HILLS		
Monitoring Season	Jan-Dec	
Network Meets Minimum Number of Monitors Required?	Yes	
Appendix E Requirements - Probe and Monitoring Path Siting Criteria		
Distance between collocated samplers	Not Applicable	
Probe Height (distance above ground level to inlet)	2.9 meters	
Airflow Arc	360°	
Probe Sample Line Material	Not Applicable	
Pollutant Sample Residence Time (seconds)	Not Applicable	
Distance from Supporting Structure/Roof (horizontal distance and vertical distance to probe/inlet)	Horizontal	0 meters
	Vertical	0.6 meters
Distance from Obstructions on Roof (horizontal distance to obstruction and vertical height of obstruction above probe/inlet)	Horizontal	no obstructions
	Vertical	no obstructions
Distance from Obstructions Not on Roof (horizontal distance to the obstruction and vertical height of obstruction above probe/inlet)	Horizontal	14 meters
	Vertical	17 meters
Distance from Dripline of Closest Tree(s)	27.4 meters	
Distance to Furnace or Flue	No Furnace or Flue	
Nearest Major Roadway	107 <sup>th</sup> Ave.	
Distance and Direction to Road	200 meters, E	
Average Daily Traffic Count	12,676	
Groundcover	Lawn / Soil	

Source: EPA AQS 2023 DQI Report (AMP256); EPA AQS 2023 QA Raw Assessment Report (AMP 251)

## **Appendix II – Public Notice and Comment Information**

Figure 16 shows the public comment period announcement, which appeared in The Record Reporter on May 20<sup>th</sup> and May 29<sup>th</sup>, 2024. The public comment period was from May 20<sup>th</sup>, 2024, to June 19<sup>th</sup>, 2024.

Additionally, the public notice was posted on the Maricopa County Air Quality Department website at [Maricopa.Gov/1624](https://www.maricopa.gov/1624).

# 2024 Public Comment Period Announcement



## MARICOPA COUNTY AIR QUALITY DEPARTMENT PUBLIC NOTICE AND MEETING ANNOUNCEMENT

Start of 30-day Public Comment Period: May 20, 2024

End of 30-day Public Comment Period: June 19, 2024

The Maricopa County Air Quality Department will hold a public meeting to discuss the 2024 Air Monitoring Network Plan. The Network Plan reports the ambient air monitoring activity captured by the Department's 23 air monitoring sites throughout Maricopa County during 2023. The 2024 Network Plan provides a summary of the airborne pollutants measured, the air monitoring network design, air monitoring site details, and statistical analyses of pollutant data. The 2024 Network Plan also covers proposed changes to the County's air monitoring network in 2024.

A virtual public comment meeting hosted by the Air Monitoring Division will be held on Tuesday, June 4th, from 10 a.m. – 12 p.m. via Microsoft Teams.

### Microsoft Teams [Need help?](#)

#### [Join the meeting now](#)

Meeting ID: 225 502 461 428

Passcode: fd4EkL

---

#### Dial-in by phone

[+1 480-702-3496,483202538#](tel:+14807023496483202538) United States, Phoenix

[Find a local number](#)

Phone conference ID: 483 202 538#

#### Join on a video conferencing device

Tenant key: [708137873@t.plcm.vc](https://t.plcm.vc)

Video ID: 119 797 978 4

[More info](#)

For organizers: [Meeting options](#) | [Reset dial-in PIN](#)

---

**New to Microsoft Teams?** Get the app now and be ready when your first meeting starts: <https://www.microsoft.com/en-us/microsoft-teams/group-chat-software>

---

**Air Quality Department**  
301 W. Jefferson St., Suite 410  
Phoenix, Arizona 85003



**P:** 602-506-6010  
**E:** [AQmail@maricopa.gov](mailto:AQmail@maricopa.gov)

Figure 16 Public Comment Period Announcement



The purpose of the meeting is to receive and discuss comments from the public regarding the 2024 Network Plan. Members of the public may comment in person during the meeting or through written statements to the department.

Additional information regarding the 2024 Network Plan may be obtained by contacting AJ Mesko at (602) 506-2601, or by email at [AirMonitoring@Maricopa.gov](mailto:AirMonitoring@Maricopa.gov). An electronic copy of the 2024 Network Plan is currently available on the department's website at: <https://www.maricopa.gov/1669/Air-Monitoring-Network-Plans-Assessments>.

In accordance with §49-426 and §49-480.02 of the Arizona Revised Statutes (ARS), any person may submit to the Air Quality Monitoring Division Manager, written comments before the end of the public comment period. Any written comment shall state the name and mailing address of the person, shall be signed by the person, his agent, or his attorney. Written comments may be mailed to the Air Monitoring Division's address at: 2145 S. 11th Ave, Phoenix, AZ 85007 or emailed to: [AirMonitoring@Maricopa.gov](mailto:AirMonitoring@Maricopa.gov). All comments are due to the department on Wednesday, June 19<sup>th</sup>, 2024, by 5 p.m.

Copies of the document and other records may be obtained by contacting the department's Records Division at 602-506-6201 or submitting a public record request online at: <https://www.maricopa.gov/5073/Public-Records-Request>.

MCAQD will take reasonable measures to provide access to department services to individuals with limited ability to speak, write, or understand English and/or to those with disabilities. Requests for language interpretation services or for disability accommodations must be made at least 48 hours in advance by contacting: (602) 506-6443.

MCAQD tomará las medidas necesarias para brindar acceso a los servicios del departamento a personas que no dominan el idioma inglés y/o personas con discapacidades. Las solicitudes de servicios de interpretación de otro idioma o adaptaciones para discapacitados deben realizarse con al menos 48 horas de anticipación comunicándose con: (602) 506-6443.



A link to join the virtual June 4<sup>th</sup>, 2024 Public Comment Meeting via Microsoft Teams is below.

[Join the meeting now](#)

### **Public Meeting Attendance – June 4th**

Attendance to the virtual open forum meeting will be taken by AJ Mesko in lieu of a sign-in sheet, and a list of attendees has been added in Table 26.

**Table 26 2024 Open Forum Meeting Attendees**

Name	Agency
AJ Mesko	Maricopa County Air Quality Department
Eric Poole	Maricopa County Air Quality Department
Karla Copeland	Maricopa County Air Quality Department

### **Public Comments Received and MCAQD Responses**

As stated in the announcement, the open forum meeting provides an opportunity for members of the public and air monitoring community to discuss the County’s air monitoring network. No comments were received by MCAQD during the public comment period which ran from May 20 – June 19, 2024.

# Appendix III – Glossary

## Glossary of Acronyms and Terms

ADEQ:	Arizona Department of Environmental Quality
AADT:	annual average daily traffic count
aka:	Also known as
AMD:	Air Monitoring Division
AMNP:	Air Monitoring Network Plan - an annual report produced for U.S. EPA each calendar year that provides comprehensive information regarding the performance of the County's air quality surveillance system, e.g., network of SLAMS and SPM monitoring stations and / or sites, and the data collected and reported to EPA. The plan includes proposed future changes to the system as well.
Analysis Method	Refers to the laboratory method used to process and analyze PM and Pb filter samples.
Analyzer:	A monitor that samples the air and produces real-time data without collecting a sample that must be laboratory analyzed.
ANSI:	American National Standards Institute
AQI:	Air Quality Index - the index that applies to each criteria pollutant and shows the concentration of each pollutant relative to its respective standard. When the AQI reaches 101, the pollutant's concentration has exceeded the NAAQS.
AQS:	Air Quality System, sometimes defined as the Air Quality Subsystem. The AQS is the U.S. EPA's ambient air database.
ASQ:	American Society for Quality
Attainment:	Attainment refers to a geographical area as being "in compliance" with a NAAQS and the U.S. Clean Air Act. After several years of no violations of a NAAQS, the U.S. EPA can

classify a geographic area as in attainment for a particular Criteria Pollutant.

AWT:	Average Weekday Traffic count
BAM:	Beta Attenuation Monitor. A continuous particulate measuring instrument used previously by MCAQD to measure PM <sub>10</sub> .
CAA:	Clean Air Act
CASAC:	Clean Air Scientific Advisory Committee
CBSA:	Core-Based Statistical Area – is defined by the U.S. Office of Management and Budget as a statistical geographic entity consisting of the county or counties associated with at least one urbanized area/urban cluster of at least 10,000 in population, plus adjacent counties having a high degree of social and economic integration.
CFR:	The Code of Federal Regulations is published annually and contains the codification of the general and permanent rules published in the Federal Register by the executive departments and agencies of the Federal Government. An eCFR is a free electronic version; however, it is not the legal version.
Class I Area:	Federally designated areas of special national or regional scenic, recreational, or historic value where maximum protection of environmental quality is highest. Class 1 areas are subject to special protection including mandated visibility requirements to prevent significant deterioration.
CO:	Carbon monoxide, a criteria pollutant
Collocated:	The practice of establishing a second pollutant monitor within a specified distance and of a specified type at a monitoring site for quality assurance purposes.
Continuous Monitor:	A method of monitoring air pollutants that is continually measuring the quantity of the pollutant, either gaseous or particulate. Continuous monitors are analyzers that can obtain real-time or short-term averages of pollutants. Continuous monitors may also be referred to as “automated” monitors.
Criteria Pollutants:	Six pollutants (CO, O <sub>3</sub> , NO <sub>2</sub> , Pb, PM, and SO <sub>2</sub> ) that have NAAQS established by the U.S. EPA.

CSA:	Combined Statistical Area - is defined by the U.S. Office of Management and Budget as when very large cities combine two or more CBSAs, these larger areas are referred to as combined statistical areas
CSN:	The chemical speciation network - a nationwide, research air monitoring network designed to ferret-out the chemical constituents of and to discern trends in PM <sub>2.5</sub> pollution. This program is managed by the U.S. EPA OAQPS.
Delta T:	The difference between two levels of temperature measurements - Delta T is measured in the MCAQD network at heights of 2 and 10 meters. A higher temperature at the upper level indicates a temperature inversion.
Design Value:	A design value is a statistic that describes the air quality status of a given area relative to the level of the NAAQS. For a concentration-based standard, the air quality design value is simply the standard-related test statistic. The design value of a pollutant monitoring network is the highest sample value in the network used to compare to the NAAQS; i.e., the 24-hour PM <sub>2.5</sub> design value for the network is the monitor with the highest 3-year average of the 98 <sup>th</sup> percentile.
Distance from Obstructions Not on Roof:	Means the horizontal distance and vertical height in meters from obstructions such as trees, walls, etc. that are higher than the sample probe/inlet.
Distance from Obstructions on Roof:	Means the horizontal distance and vertical height in meters from obstructions on a roof such as a parapets, penthouses, and firewalls to the sample probe/inlet.
Distance from Supporting Structure:	Means the horizontal distance and vertical height in meters from a building or shelter roof to the sample probe/inlet. A roof supports all monitors; whether it be the roof of a building, trailer (room/shelter), or monitor housing cabinet.
EBAM:	E-Beta Attenuation Monitor - is a rugged, portable, battery or solar-operated analyzer that is suitable for obtaining and reporting continuous measurements of particulate matter in remote locations. EBAMs are often equipped with wind speed and direction instrumentation as well. EBAMs are particularly useful for temporary measurements of PM related to an event.
EPA R9:	Environmental Protection Agency Region 9

EE:	Exceptional Event – a high pollution event that is considered to be uncontrollable and caused by natural sources of pollution or an event that is not expected to recur at a given location. An EE can apply to any Criteria Pollutant.
Event:	Generally, refers to a high pollution day where a NAAQS was exceeded.
Exceedance:	Generally, refers to a high pollution day where a NAAQS was exceeded.
FDMS-TEOM:	Filter Dynamics Measurement System-Tapered Element Oscillating Microbalance - a continuous particulate analyzer used by MCAQD to measure PM <sub>2.5</sub> .
FEM:	Federal Equivalent Method - an EPA-approved method of sampling and analyzing the ambient air for an air pollutant, i.e., includes the monitor and its operating firmware and procedure(s). An FEM must pass required testing found in 40 CFR Part 53 and show pollutant data produced are similar to the Federal Reference Method (FRM). Continuous particulate matter and some gaseous analyzers are FEMs.
Filter-based sampler:	A method of monitoring particulate pollution that involves exposing a pre-weighed filter to a specific flow rate for a prescribed period of time, usually midnight-to-midnight, or 1440 minutes. The filters are then post-weighed to determine the mass of particulates per volume, e.g., µg/m <sup>3</sup> . Filter samples are stored for a period and can be referenced later if needed.
FRM:	Federal Reference Method - an EPA-approved method of sampling and/or analyzing the ambient air for an air pollutant, i.e., includes the monitor and its operating firmware and procedure(s). An FRM must pass required testing found in 40 CFR Part 53 and show data produced are accurate based on acceptable precision and bias limits. These methods are the baseline that all other methods reference, e.g., Federal Equivalency Methods (FEM).
HAPs:	Hazardous Air Pollutants - airborne chemicals that are been listed in the federal Clean Air Act and have an associated standard or process requirement determined for it.
Sample Probe/Inlet Height:	Means the vertical height in meters above the roof, or additional supporting structure on top of the roof if present, to the air sample intake. In general, gas samples enter through a probe at the end of the sample line and PM and Pb samples enter through

an inlet that helps control the aerodynamic size of particles sampled.

MAG:	Maricopa Association of Governments
MCAQCED:	Maricopa County Air Quality Compliance and Enforcement Division
MCAQD:	Maricopa County Air Quality Department
Metadata:	refers to data that provide information about other data; and typically includes geospatial and non-geospatial information. See <a href="#">EPA Metadata Specifications</a>
MO:	Monitoring organization
Monitor:	Monitor is a term that refers to an instrument, sampler, analyzer, or other device that measures or assists in the measurement of atmospheric air pollutants and which is acceptable for use in ambient air surveillance under the applicable provisions of 40 CFR Part 58 Appendix C.
$\mu\text{g}/\text{m}^3$ :	micrograms per cubic meter
$\mu\text{m}$ :	micrometers
MSA:	<p>Metropolitan Statistical Area is designated by the U.S. Office of Management and Budget as a geographical area based on the concept of a core area with a large population nucleus, plus adjacent communities having a high degree of economic and social integration within that core.</p> <p>Metropolitan and micropolitan statistical areas are the two categories of CBSAs. Metropolitan areas have populations greater than 50,000, and micropolitan areas have populations between 10,000 and 50,000. The MCAQD operates air monitoring stations within the Phoenix-Mesa MSA, which includes portions of Maricopa and Pinal County.</p>
NAAQS:	National Ambient Air Quality Standards - health and welfare-based standards established by the U.S. EPA that set permissible airborne concentration levels for the Criteria Pollutants.
NATTS:	National Air Toxics Trend Stations - a nationwide, research air monitoring program designed to measure toxic air pollutant trends. This program is managed by the U.S. EPA OAQPS.

NCORE:	National <u>Core</u> multi-pollutant is a national network of multi-pollutant monitoring sites used to represent the nation as a whole. There are currently ~75 NCORE sites, 1 to 3 per state plus Washington D.C., Virgin Islands, and Puerto Rico located in both urban and rural areas. This program is managed by the U.S. EPA OAQPS.
Network:	All stations of a given type or types
NO <sub>2</sub> :	Nitrogen dioxide. The indicator compound used to gauge the ambient concentration of NO <sub>x</sub> .
NO <sub>x</sub> :	Nitrogen oxide(s), a criteria pollutant. NO <sub>x</sub> is the sum of nitric oxide (NO), NO <sub>2</sub> , and other nitrogen-containing compounds.
Nonattainment:	Means a geographical area is “not in compliance” with the NAAQS and the U.S. Clean Air Act. After several years of violating a NAAQS, the EPA can classify a geographic area as being in nonattainment for a particular criteria pollutant.
O <sub>3</sub> :	Ozone, a criteria pollutant
OAQPS:	The U.S. EPA Office of Air Quality Planning and Standards, located in Research Triangle Park, N.C., which serves as EPA “Headquarters” for ambient air monitoring guidance and the NAAQS reviews.
PAMS:	Photochemical Ambient Monitoring Stations - a nationwide, research air monitoring program designed to measure specific airborne chemicals that are known to be “precursor pollutants” that form ozone when combined with ultraviolet light and heat. This program is managed by the U.S. EPA OAQPS.
PCAQCD:	Pinal County Air Quality Control District
Pb:	Lead, a criteria pollutant
Performance Evaluation (PE) Audit:	Quality Assurance audits performed on pollutant monitors.
PM:	Particulate matter, also known as “particulates”, project manager, or preventative maintenance depending on context
PM <sub>2.5</sub> :	Particulate matter 2.5 micrometers in aerometric diameter or smaller, a criteria pollutant. PM <sub>2.5</sub> is also referred to as “fine” particulate matter.

PM <sub>10</sub> :	Particulate matter 10 micrometers in aerometric diameter or smaller, a criteria pollutant
PM <sub>10-2.5</sub> and / or PM <sub>c</sub> :	“Coarse” particulate matter is less than 10 micrometers, but recently, has come to mean PM <sub>10</sub> minus PM <sub>2.5</sub> , not currently regulated as a lone criteria pollutant.
ppb:	parts per billion
ppm:	parts per million
PQAO:	Primary quality assurance organization - a monitoring organization (MO) or other organization that is responsible for a set of air monitoring stations that monitor the same pollutant and for which data quality assessments can be pooled. Each criteria pollutant sampler/monitor at a monitoring station in the SLAMS and SPM networks must be associated with one, and only one, primary quality assurance organization.
Primary Standard:	The portion of the NAAQS designed to protect public health.
Probe:	The end of a sample line where a gas sample is extracted from the atmosphere for delivery to a point analyzer for pollutant analysis
Probe/Inlet Height:	The vertical height in meters above ground level to the air sample intake location for an analyzer or sampler
Probe (Sample) Line Material:	Refers to the chemical composition of the sample line tubing.
QA:	Quality Assurance – generally refers to the administrative or managerial processes in place to verify that quality control activities are successfully carried out by personnel and that data produced meet specified quality requirements prior to use, i.e., written guidance documents, program oversight activities, etc.
QC:	Quality Control – generally refers to the technical activities in place to produce high quality data, i.e., air monitoring instruments operate within specified criteria, data collection from sites, etc.
Quality System:	The overall system of technical activities that measure the attributes and performance of a process, item, or service against defined standards to verify that they meet the stated

requirements established by the customer. (see ANSI/ASQ E4-2004)

Rapid Response:	Rapid Response Notification System - a communication tool used by MCAQD to manage high-pollution events by alerting residents, intergovernmental personnel, and stakeholders of increasing PM concentrations.
Sampler:	A type of air monitor that collects a physical sample for analysis. Air samples may be collected onto a filter, cartridge, or other medium, or into a device such as a canister.
Sample Residence Time:	This measurement applies to CO, NO <sub>2</sub> , O <sub>3</sub> , and SO <sub>2</sub> sample lines and it means the amount of time in seconds that it takes for a sample of air to travel from the probe intake to the bulkhead of the point analyzer. EPA recommends a residence time of 10 seconds, but 20 seconds is the maximum allowable.
Secondary Standard:	The portion of the NAAQS designed to protect public welfare and the environment.
SIP:	State Implementation Plan - a SIP is a plan produced by state and/or local regulatory agencies that specifies obligations that will be taken for a geographic area in nonattainment to meet the NAAQS for a criteria pollutant. SIPs are also developed for maintaining compliance with the NAAQS.
Site:	A site is a geographic location. One or more air monitoring stations can be located at a site.
SLAMS:	State and Local Air Monitoring Station - the SLAMS network consists of approximately 5,000 monitoring stations nationwide whose size and distribution is largely determined by the needs of State and local air pollution control agencies to meet their respective SIP requirements. Other types of monitoring stations include: NCore (national core) and SPM (special purpose).
SO <sub>2</sub> :	Sulfur dioxide, a criteria pollutant
SPM:	Special Purpose Monitor - a special purpose monitor provides data for special studies needed by the State and local agencies to support SIPs and other air program activities. The SPMs are not permanently established as part of a particular pollutant's

monitoring station(s); their location can be adjusted easily to accommodate changing needs and priorities.

- SSI: Size Selective Inlet - the inlet used on high- and low-volume particulate samplers and analyzers to determine the size of particles sampled or measured by the monitor. The particle size separation process usually employs impaction, filtration, or cyclonic flow.
- Station: A station may comprise a single pollutant monitor, or a group of monitors with a shared objective, located at a particular site.
- TEOM: Tapered Element Oscillating Microbalance - an automated, continuous FEM PM analyzer used by MCAQD to measure PM<sub>10</sub> and/or PM<sub>2.5</sub> concentrations, depending upon the instrument model and air sample inlet configuration(s).
- tpy: tons per year
- UATMP: Urban Air Toxics Monitoring Program - a nationwide research air monitoring program designed to measure toxic air pollutants within urban areas. This program is managed by the U.S. EPA OAQPS.
- U.S. EPA: United States Environmental Protection Agency
- VOC: Volatile Organic Compound - VOCs are chemical compounds that can easily vaporize and enter the atmosphere. There are many natural and artificial sources of VOCs; solvents and gasoline make up some of the largest artificial sources. VOCs will react with NO<sub>x</sub> in the presence of sunlight to create ground-level O<sub>3</sub> pollution.
- Volume: The amount of air sampled for analysis. Volume is calculated by multiplying a monitor's flowrate by the collection time, usually in minutes.

$$\text{Volume} = \text{flowrate} \times \text{minutes}$$

The amount of data in a file or database.