




Maricopa County Air Quality Department

# 2007 Air Monitoring Network Review

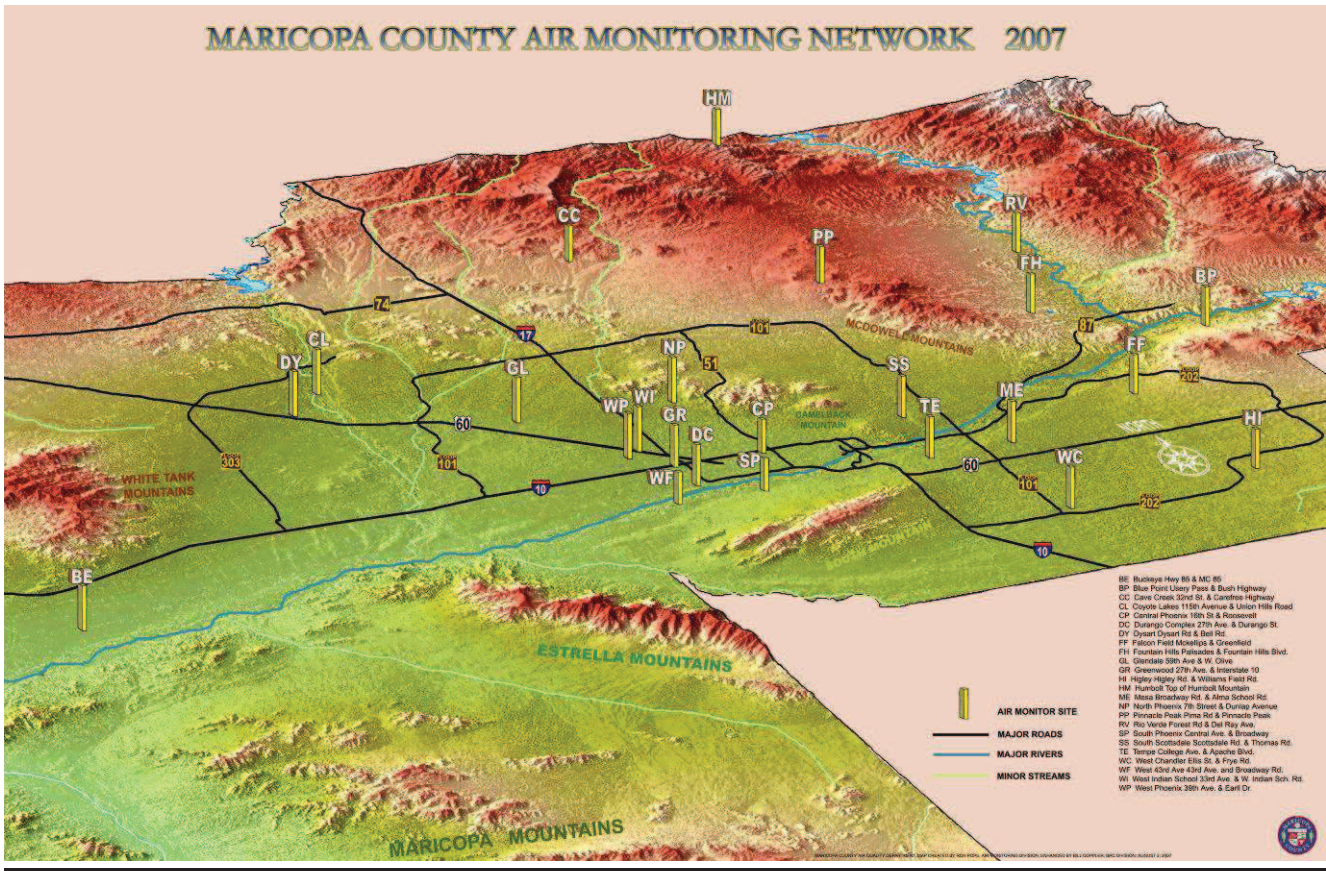

Air Monitoring Division  
1001 N. Central Ave. Suite 550  
Phoenix, AZ 85004

## **Acknowledgements**

The Maricopa County Air Monitoring Division maintains twenty-four ambient air monitoring sites throughout Maricopa County. Some of the exciting new events happening this year include the opening of our new Coyote Lakes site to do special purpose monitoring of PM-10 sources in the area and the securing of a new building for the Air Monitoring division. We've also hired new technicians this year and are at full staff for the first time in many years. New technicians hired include Alex Herrera, Dan Spiegelberg, Tom Dubishar, and Michael Gardner. I would especially like to thank all of the air monitoring staff for the excellent job they did in maintaining Maricopa County's air monitoring network. They are Larry Seals, Del Hawkins, Gary Ensminger, Robert Dyer, Ronald Pope, Tom Shorb, Dale Foster, Chris Hernandez, Hugh Tom, Charles Miller, Carl Harper, Alex Herrera, Dan Spiegelberg, Tom Dubishar, and Michael Gardner.

In addition, the assistance of other agencies that provided data and helpful comments to this review is gratefully acknowledged. These include Arizona Department of Environmental Quality (ADEQ), Pinal County Air Quality Control District (PQAQCD), and Maricopa Association of Governments (MAG).

Ben Davis  
Air Monitoring Division Manager  
Maricopa County Air Quality Department

# Table of Contents

<b>ACKNOWLEDGEMENTS</b> .....	<b>1</b>
<b>ABSTRACT</b> .....	<b>4</b>
<b>DEFINITION OF TERMS</b> .....	<b>5</b>
<b>CRITERIA POLLUTANT INFORMATION</b> .....	<b>7</b>
<u>ABSTRACT OF POLLUTANTS</u> .....	7
<u>CAUSES AND CHARACTERISTICS OF POLLUTANTS</u> .....	7
Carbon Monoxide:.....	7
Lead:.....	7
Nitrogen Dioxide:.....	8
Ozone: .....	8
Particulate Matter: .....	8
Sulfur Dioxide: .....	8
<u>NATIONAL AMBIENT AIR QUALITY STANDARDS</u> .....	9
<u>ABSTRACT OF MCAQD POLLUTION MONITORING STRATEGIES</u> .....	10
<b>NETWORK DESIGN</b> .....	<b>11</b>
<u>PURPOSE AND OBJECTIVE OF THE NETWORK</u> .....	11
<u>OVERVIEW OF THE MCAQD NETWORK</u> .....	12
<b>2007 SUMMARY OF NETWORK RESULTS AND REQUIRED INFORMATION</b> .....	<b>16</b>
<u>DATA COMPLETENESS</u> .....	16
<u>CRITERIA POLLUTANT SUMMARY</u> .....	17
Carbon Monoxide (CO).....	17
Ozone (O <sub>3</sub> ).....	19
Particulate Matter <=10 Microns (PM <sub>10</sub> ).....	22
Particulate Matter <=2.5 Microns (PM <sub>2.5</sub> ).....	24
Nitrogen Dioxide (NO <sub>2</sub> ) .....	26
Sulfur Dioxide (SO <sub>2</sub> ) .....	27
<u>2007 NAAQS EXCEEDANCE AND VIOLATION SUMMARY</u> .....	28
<u>2007 VIOLATIONS OF THE 24-HOUR PM<sub>10</sub> STANDARD</u> .....	29
<u>EXCEPTIONAL EVENTS</u> .....	29
<u>POLLUTION TRENDS</u> .....	31
Carbon Monoxide.....	31
Nitrogen Dioxide.....	31
Ozone .....	32
Particulates .....	32
Sulfur Dioxide.....	34
<b>SPECIAL PROJECTS AND NETWORK CHANGES</b> .....	<b>35</b>
<u>SEASONAL MONITORS</u> .....	35
<u>THE CONSIDERATION OF ADDITIONAL SITES/MONITORS</u> .....	35
<u>NEW SITES</u> .....	35
<u>CLOSED SITES/MONITORS</u> .....	36
<u>OTHER NETWORK CHANGES/SPECIAL PROJECTS/COMMENTS</u> .....	36
<u>MOBILE MONITORING PROGRAM</u> .....	36
<b>ADDITIONAL COMMENTS</b> .....	<b>37</b>
<u>ARIZONA DEPARTMENT OF ENVIRONMENTAL QUALITY NETWORK</u> .....	37
<u>EPA OZONE MAPPING</u> .....	37
<u>MARICOPA COUNTY'S INTERACTIVE POLLUTION MAP</u> .....	38
<b>REFERENCES</b> .....	<b>40</b>
<b>APPENDIX I - MONITORING SITE DETAILS (PHOTOS AND SPECIFIC INFORMATION)</b> .....	<b>41</b>

<b>APPENDIX II - EPA REQUIRED DATA .....</b>	<b>66</b>
<u>REQUIRED GENERAL INFORMATION ON MONITORING NETWORK .....</u>	67
<u>REQUIRED GENERAL STATEMENT REGARDING CHANGES TO THE PM<sub>2.5</sub> NETWORK.....</u>	67
<u>NOTES REGARDING APPENDIX DATA .....</u>	67
<b>APPENDIX III - PUBLIC NOTICE AND COMMENT INFORMATION.....</b>	<b>92</b>
<u>PUBLIC NOTICE PERIOD .....</u>	93
<u>PUBLIC COMMENTS.....</u>	93
<u>NEWS RELEASE.....</u>	93

**List of Tables**

Table 1 National Ambient Air Quality Standards .....	9
Table 2 Site Monitoring Objectives .....	11
Table 3 Spatial Measurement Scales .....	11
Table 4 Maricopa County Ambient Air Monitoring Sites for 2007 .....	13
Table 5 Criteria Pollutants Monitored, by Site and Network .....	13
Table 6 Site Location .....	14
Table 7 Site Instrument Setup .....	15
Table 8 2007 Criteria Pollutant Data Completeness.....	16
Table 9 2007 1-hour and 8-hour Average Carbon Monoxide Summary .....	18
Table 10 2007 8-hour Average Ozone Summary .....	20
Table 11 3 Year Average of 8-Hour Ozone .....	21
Table 12 2007 PM <sub>10</sub> Summary .....	23
Table 13 2007 PM <sub>2.5</sub> Summary (FRM Monitors).....	25
Table 14 2007 PM <sub>2.5</sub> Data Summary (Continuous Monitors) .....	25
Table 15 2007 PM <sub>2.5</sub> 3-Year Averages of 98 <sup>th</sup> Percentile (FRM Monitors) .....	25
Table 16 2007 PM <sub>2.5</sub> 3-Year Averages of Annual Means (FRM Monitors).....	25
Table 17 2007 Nitrogen Dioxide Summary .....	26
Table 18 2007 Sulfur Dioxide Summary.....	27
Table 19 2007 NAAQS Exceedances and Violations Summary .....	28
Table 20 2007 PM <sub>10</sub> 24-hour Average Exceedance Details .....	28
Table 21 Violations of the 24-hr PM <sub>10</sub> Standard .....	29
Table 22 2007 PM-10 Violations Following Expected Approval of Exceptional Events .....	30
Table 23 Seasonal Monitors .....	35
Table 24 Air Quality Index .....	38

**List of Figures**

Figure 1 Maricopa County Air Monitoring Sites for 2007.....	12
Figure 2 2007 Carbon Monoxide Monitoring Sites.....	17
Figure 3 2007 Ozone Monitoring Sites .....	19
Figure 4 2007 PM <sub>10</sub> Monitoring Sites (includes continuous and non-continuous sites).....	22
Figure 5 2007 PM <sub>2.5</sub> Monitoring Sites (continuous and non-continuous) .....	24
Figure 6 2007 Nitrogen Dioxide Monitoring Sites.....	26
Figure 7 2007 Sulfur Dioxide Monitoring Sites .....	27
Figure 8 EPA AIRNow Website .....	37
Figure 9 Interactive Website Data Trends Page .....	39

**List of Charts**

Chart 1 2005-2007 8-hr Avg. Carbon Monoxide Maximum Values.....	31
Chart 2 2005-2007 Nitrogen Dioxide Annual Average Readings.....	31
Chart 3 2005-2007 Ozone 4th high 8-hr Average .....	32
Chart 4 2005-2007 PM <sub>10</sub> 24-hr Average Maximum Values.....	32
Chart 5 2005-2007 PM <sub>10</sub> Annual Average .....	33
Chart 6 2005-2007 PM <sub>2.5</sub> Annual Average.....	33
Chart 7 2005-2007 PM <sub>2.5</sub> 98 <sup>th</sup> Percentile.....	34
Chart 8 2005-2007 Sulfur Dioxide Annual Average.....	34

## **ABSTRACT**

This 2007 Annual Air Monitoring Network Review is being submitted by the Maricopa County Air Quality Department<sup>1</sup> (MCAQD) to the United States Environmental Protection Agency (US EPA) Region 9. The network review evaluates the adequacy of the ambient air monitoring network with respect to the monitoring objectives and spatial scales. This annual assessment is required by 40 CFR Part 58, Subpart B. Network changes, special projects, and 3-year data summaries are included in the review. This Network Review is also preliminary to our annual data certification with the US EPA and helps us assess the quality of our data before submitting for data certification. This network review has the secondary purpose of informing the public of the criteria air pollutants that can affect their health, how the MCAQD monitors these criteria pollutants, and what the actual readings are so that our citizens can make informed decisions regarding their lifestyles.

---

<sup>1</sup> The functions of the former Air Quality Division of the Maricopa County Environmental Services Department (MCESD) were transferred to the newly-created Air Quality Department in November 2004.

## DEFINITION OF TERMS

<b>ADEQ:</b>	Arizona Department of Environmental Quality.
<b>AQS:</b>	Environmental Protection Agency's Air Quality System
<b>Attainment:</b>	This refers to the NAAQS used to comply with the federal Clean Air Act. After several years of no violations of the NAAQS, the EPA can classify the area as in attainment for that pollutant.
<b>CFR:</b>	Code of Federal Regulations.
<b>Class I:</b>	Federally designated park or wilderness area with mandated visibility protection.
<b>CO:</b>	Carbon monoxide.
<b>Criteria</b>	
<b>Pollutants:</b>	Six pollutants (CO, Lead, NO <sub>2</sub> , O <sub>3</sub> , Particulates, and SO <sub>2</sub> ) that have NAAQS established by the US EPA.
<b>Delta T:</b>	Difference between two levels of temperature measurements. Delta T is measured in the MCAQD network at heights of 2 and 10 meters. A higher temperature at the upper level indicates a temperature inversion.
<b>Design</b>	
<b>Value:</b>	A design value is a statistic that describes the air quality status of a given area relative to the level of the NAAQS. For a concentration-based standard, the air quality design value is simply the standard-related test statistic. The design value of a pollutant monitoring network is the highest sample value in the network used to compare to the NAAQS; e.g. the 24-hour PM <sub>2.5</sub> design value for the network is the monitor with the highest 3-year average of the 98 <sup>th</sup> percentile.
<b>EPA:</b>	U. S. Environmental Protection Agency.
<b>Exceptional</b>	
<b>Events:</b>	An uncontrollable event caused by natural sources of pollution or an event that is not expected to recur at a given location.
<b>FDMS-</b>	
<b>TEOM:</b>	Filter Dynamics Measurement System-Tapered Element Oscillating Microbalance. A continuous particulate measuring instrument used by MCAQD to measure PM <sub>2.5</sub> .
<b>HAPs:</b>	Hazardous air pollutants. An air-borne chemical that has been listed in the federal Clean Air Act and has an associated standard or process requirement determined for it.
<b>MCAQD:</b>	Maricopa County Air Quality Department.
<b>µg/m<sup>3</sup>:</b>	Microgram per cubic meter.
<b>MSA:</b>	Metropolitan Statistical Area. A geographical area designated by the federal government based on the concept of a core area with a large population nucleus, plus adjacent communities having a high degree of economic and social integration with that core. The MCAQD operates within the Phoenix-Mesa MSA which includes portions of Maricopa and Pinal County.
<b>NAAQS:</b>	National Ambient Air Quality Standards. A health and welfare-based standard that is set by the US EPA to qualify allowable levels of criteria pollutants.
<b>NCORE</b>	National Core Multi-Pollutant Site. A national network of multi-pollutant monitoring sites used to represent the nation as a whole. There are currently ~75 NCORE sites (1-3 per state plus Washington DC, Virgin Islands, and Puerto Rico) located in both urban and rural areas.
<b>NO<sub>2</sub>:</b>	Nitrogen dioxide.
<b>NO<sub>x</sub>:</b>	Sum of nitrogen oxide and NO <sub>2</sub> .
<b>O<sub>3</sub>:</b>	Ozone.
<b>Pb:</b>	Lead.
<b>PM:</b>	Particulate matter. Material suspended in the air in the form of minute solid particles or liquid droplets.
<b>PM<sub>2.5</sub>:</b>	Particulate matter of 2.5 Microns in diameter or smaller
<b>PM<sub>10</sub>:</b>	Particulate matter of 10 Microns in diameter or smaller.
<b>PPM:</b>	Parts per million.
<b>Primary</b>	
<b>Standard:</b>	One portion of the NAAQS. These standards are designed to protect the public health.

**Secondary**

- Standard:** The less stringent portion of the NAAQS designed to protect property and the environment.
- SIP:** State Implementation Plan. SIPs are a collection of state and local regulations and plans to achieve healthy air quality under the Clean Air Act.
- SLAMS:** State and Local Air Monitoring Station. The SLAMS consist of a network of approximately 5,000 monitoring stations nationwide whose size and distribution is largely determined by the needs of State and local air pollution control agencies to meet their respective State implementation plan (SIP) requirements. Other types of monitoring stations include NCORE (national core) and SPM (special purpose) monitors. Maricopa County does not currently operate any NCORE sites and only operates one SPM site.
- SO<sub>2</sub>:** Sulfur dioxide.
- SPM:** Special purpose monitor. Special Purpose Monitoring Stations provide for special studies needed by the State and local agencies to support State implementation plans and other air program activities. The SPMs are not permanently established and can be adjusted easily to accommodate changing needs and priorities.
- SSI:** Size Selective Inlet. SSI High Volume Samplers are filter-based instruments used by MCAQD to measure PM<sub>10</sub>.
- TEOM:** Tapered Element Oscillating Microbalance. A continuous particulate measuring instrument used by MCAQD to measure PM<sub>10</sub>.
- VOC:** Volatile organic compounds. VOCs are chemical compounds that can easily vaporize and enter the atmosphere. There are many natural and artificial sources of VOCs; solvents and gasoline make up some of the largest artificial sources. VOCs will react with NO<sub>x</sub> in the presence of sunlight to create ground-level ozone pollution.

# CRITERIA POLLUTANT INFORMATION

## **Abstract of Pollutants**

Certain air pollutants, called “criteria air pollutants,” are common throughout the United States. These pollutants can cause health problems, harm the environment, and cause property damage. These criteria pollutants are so named since the US EPA has regulations, called the National Ambient Air Quality Standards (NAAQS), on allowable levels of these substances using health-based criteria. One set of limits, called “primary standards”, protect health, while another set of “secondary” standards, are designed to protect property and the environment. The US EPA names the following pollutants as criteria pollutants: carbon monoxide (CO), lead (Pb), nitrogen dioxide (NO<sub>2</sub>), ozone (O<sub>3</sub>), particulates (PM<sub>10</sub> & PM<sub>2.5</sub>), and sulfur dioxide (SO<sub>2</sub>). MCAQD operates monitors for the following criteria pollutants: carbon monoxide, ozone, particulates, nitrogen dioxide, and sulfur dioxide. Since levels of lead have been consistently below national levels, MCAQD has been allowed to stop monitoring for lead.

## **Causes and Characteristics of Pollutants**

### **Carbon Monoxide:**

CO is the most widely distributed and most commonly occurring air pollutant. Total emissions of CO to the atmosphere exceed all other pollutants combined, on a weight basis. Fortunately, CO does not persist in the atmosphere, but is quickly converted to carbon dioxide (CO<sub>2</sub>). CO can reach dangerous levels in localized areas or hotspots such as heavily traveled intersections or city streets. In addition, CO has been implicated in ozone formation. Most people are familiar with CO and are aware that automobiles produce this deadly odorless and colorless gas. In Maricopa County, more than 70% of all anthropogenic CO comes from motor vehicle emissions. In fact, this gas is produced almost anytime something is burned. All substances that are living (plants, animals) or that were once living (wood, coal, oil, gasoline) are composed of carbon compounds. If these substances are burned in the presence of sufficient oxygen, the carbon is converted to CO<sub>2</sub> gas. If, as is often the case, not enough oxygen is present, carbon monoxide gas is produced.

Carbon monoxide’s danger lies in the extremely strong affinity that hemoglobin has for it. Hemoglobin, the special oxygen-transporting material in the red blood cell, has approximately 200 times stronger affinity for CO than for oxygen. Therefore, if both CO and O<sub>2</sub> are present the bonding between the CO and hemoglobin will prevent the O<sub>2</sub> from exchanging within a person’s body. This puts a heavy burden on people with heart disease and can aggravate angina, but even healthy people can suffer from harmful side effects from CO.

In 2007 Maricopa County achieved its eleventh consecutive year of compliance with the eight-hour CO standard.

### **Lead:**

Lead is a metal found naturally in the environment as well as in manufactured products. The major sources of lead emissions have historically been motor vehicles (such as cars and trucks) and industrial sources. Due to the phase out of leaded gasoline, metals processing is the major source of lead emissions to the air today. The highest levels of lead in air are generally found near lead smelters. Other stationary sources are waste incinerators, utilities, and lead-acid battery manufacturers. In the early 1970s, EPA set national regulations to gradually reduce the lead content in gasoline. In 1975, unleaded gasoline was introduced for motor vehicles equipped with catalytic converters. EPA banned the use of leaded gasoline in highway vehicles in December 1995. Primarily as a result of EPA's regulatory efforts to remove lead from gasoline, levels of lead in the air have decreased by 94 percent between 1980 and 1999.

Since levels of lead have been consistently below national levels, Maricopa County was allowed to discontinue ambient air monitoring for lead in 1997.

**Nitrogen Dioxide:**

NO<sub>2</sub> belongs to a family of highly reactive gases called nitrogen oxides. These gases are formed when fuel is burned at high temperatures, and are emitted primarily from automobile exhaust and power plants. Exposure to nitrogen dioxide can irritate the lungs and lower resistance to respiratory infections, particularly in people with existing respiratory illness such as asthma. Maricopa County is currently in attainment status for NO<sub>2</sub>.

**Ozone:**

O<sub>3</sub> is a naturally occurring compound in which three oxygen atoms combine together. This is an unstable combination, and ozone is continually going through a natural cycle of being formed and then converting back to the more stable "normal" double oxygen compound (O<sub>2</sub>). The cycle occurs fairly rapidly. In the stratosphere (6 miles and more above the earth), naturally occurring ozone has a beneficial effect of screening out harmful ultraviolet light from the sun. However, ground-level ozone is a pollutant and is a component of the regional smog that affects the valley. Ozone is not directly emitted into the air, but rather forms in a complex reaction that involves heat, sunlight, and a "soup" of toxic pollutants, especially volatile organic compounds (VOCs). Some of the most common sources of VOCs are gasoline vapors, chemical solvents, and combustion products of fuels and consumer products. Ozone is created by sunlight acting on nitrates (NO<sub>x</sub>) and VOCs from motor vehicles and stationary sources, and can be carried hundreds of miles from their origins. Ozone affects the respiratory system in people and animals, and also affects the growth of plants.

Maricopa County is currently not in attainment for Ozone pollution, although the number of violations of the standard has been decreasing in recent years.

**Particulate Matter:**

Particulate matter is the term for solid or liquid particles found in the air. Particle pollution is made up of a number of components, including acids (such as nitrates and sulfates), organic chemicals, metals, and soil or dust particles. While some particles are large or dark enough to be seen as soot or smoke, others can only be seen through an electron microscope. In 1987 the EPA replaced the Total Suspended Particulates (TSP) air quality standard with a standard for PM<sub>10</sub> (particles measuring ten microns or less). Health research studies have found that PM<sub>10</sub> has the ability to reach the lower regions of the respiratory tract, and thus can affect the respiratory system in both humans and animals. Particulates that have high acid levels can cause damage to man-made materials and reduce visibility.

The size of particles is directly linked to their potential for causing health problems. EPA is concerned about particles that are 10 micrometers in diameter or smaller because those are the particles that generally pass through the throat and nose and enter the lungs. Once inhaled, these particles can affect the heart and lungs and cause serious health effects. EPA groups particle pollution into two categories:

- "Coarse particles," such as those found near roadways and dusty industries, range in size from 2.5 to 10 microns in diameter.
- "Fine particles," such as those found in smoke and haze, have diameters smaller than 2.5 microns. These particles can be directly emitted from sources such as forest fires, or they can form when gases emitted from power plants, industries and automobiles react in the air.

Maricopa County is currently not in attainment for PM<sub>10</sub> (although we are in attainment for PM<sub>2.5</sub>), nor have we met the requirements set forth in our State Implementation Plan (SIP). As a result of this, the EPA is implementing a 5% reduction of emissions plan, including the possibility of sanctions. This plan, which is required by the Clean Air Act, will continue until Maricopa County can bring the particulate matter pollution down into compliance.

**Sulfur Dioxide:**

SO<sub>2</sub> is emitted (in gaseous form) largely from burning high-sulfur coal, oil, and diesel fuel. Because this gas is usually found in association with particulate pollution, as SO<sub>2</sub> is the precursor for fine sulfate particles, separating the health effects of these two pollutants is difficult. Together SO<sub>2</sub> and PM<sub>2.5</sub> make up a major

portion of the pollutant load in many cities, acting separately and in concert to threaten public health. SO<sub>2</sub> contributes to respiratory illness, particularly in children and the elderly, and aggravates existing heart and lung diseases. SO<sub>2</sub> contributes to the formation of acid rain, and it contributes to the formation of atmospheric particles that cause visibility impairment, most noticeably in national parks. SO<sub>2</sub> and the pollutants formed from SO<sub>2</sub>, such as sulfate particles, can be transported over long distances and deposited far from the point of origin. This means that problems with SO<sub>2</sub> are not confined to areas where it is emitted.

Maricopa County is in attainment for Sulfur Dioxide.

### **National Ambient Air Quality Standards**

The EPA Office of Air Quality Planning and Standards (OAQPS) manages programs to improve air quality in areas where the current quality is unacceptable and to prevent deterioration in areas where the air is relatively free of contamination. To accomplish this task, OAQPS establishes the National Ambient Air Quality Standard (NAAQS) for each of the criteria pollutants (see Table 1).

There are two types of standards. Primary standards protect against adverse health effects; secondary standards protect against welfare effects, such as damage to farm crops and vegetation and/or damage to buildings. Because different pollutants have different effects, the NAAQS are also different. Some pollutants have standards for both long-term and short-term averaging times. The short-term standards are designed to protect against acute, or short-term, health effects, while the long-term standards are established to protect against chronic health effects. Table 1 lists the NAAQS for the six criteria pollutants.

**Table 1 National Ambient Air Quality Standards**

<b>Pollutant</b>	<b>Primary Standards</b>	<b>Averaging Times</b>	<b>Secondary Standard</b>
Carbon Monoxide	9 ppm	8-hour <sup>a</sup>	None
	35 ppm	1-hour <sup>a</sup>	None
Lead	1.5 µg/m <sup>3</sup>	Quarterly Average	Same as Primary
Nitrogen Dioxide	0.053 ppm	Annual (Arithmetic Mean)	Same as Primary
PM <sub>10</sub>	150 µg /m <sup>3</sup>	24-hour <sup>a</sup>	Same as Primary
PM <sub>2.5</sub>	15 µg/m <sup>3</sup>	Annual <sup>b</sup> (Arithmetic Mean)	Same as Primary
	35 µg/m <sup>3</sup>	24-hour <sup>c</sup>	Same as Primary
Ozone	0.08 ppm	8-hour <sup>d</sup>	Same as Primary
Sulfur Oxides	0.03 ppm	Annual (Arithmetic Mean)	-----
	0.14 ppm	24-hour <sup>a</sup>	-----
	-----	3-hour <sup>a</sup>	0.5 ppm

<sup>a</sup> Not to be exceeded more than once per year.

<sup>b</sup> To attain this standard, the 3-year average of the annual arithmetic mean PM<sub>2.5</sub> concentrations from single or multiple community-oriented monitors must not exceed 15 µg/m<sup>3</sup>.

<sup>c</sup> To attain this standard, the 3-year average of the 98th percentile of 24-hour concentrations at each population-oriented monitor within an area must not exceed 35 µg/m<sup>3</sup>.

<sup>d</sup> To attain this standard, the 3-year average of the fourth-highest daily maximum 8-hour average ozone concentrations measured at each monitor within an area over each year must not exceed 0.08 ppm.

## **Abstract of MCAQD Pollution Monitoring Strategies**

The MCAQD monitors for these criteria pollutants by maintaining twenty-four ambient air-monitoring sites throughout Maricopa County. The dates that the sites were established range from 1961 (Central Phoenix) to 2007 (Coyote Lakes). Land use patterns around these sites vary from heavy populated urban areas to sparsely populated rural settings. Site elevations range from 845 feet above sea level (Buckeye) to 5190 feet above sea level at the top of Humboldt Mountain. Not all pollutants are measured at all sites; some sites measure most of the pollutants, while others only measure one or two pollutants.

The following section will detail how MCAQD designs its air monitoring network to obtain representative samples of these air pollutants. Following this will be details of the results obtained from our 2007 sampling season.

# NETWORK DESIGN

## Purpose and Objective of the Network

The purpose of the ambient air monitoring network is to assess the extent of air pollution, ensure compliance with national legislation, evaluate control options, and provide data for air quality modeling. In general, six basic monitoring objectives and five measuring scales are used to determine the network design (see Table 2 and Table 3). Additional considerations such as availability of power, accessibility to site, security, geographic location, and fiscal and personnel resources are also addressed in determining the feasibility of the network design.

**Table 2 Site Monitoring Objectives**

1. Determine highest concentrations expected to occur in the area covered by the network.
2. Determine representative concentrations in areas of high population density.
3. Determine the impact on ambient pollution levels of significant sources or source categories.
4. Determine general background concentration levels.
5. Determine the extent of regional pollutant transport from populated areas, with regards to the secondary standards (such as visibility impairment and effects on vegetation).
6. Determine the welfare-related impacts in more rural and remote areas.

To establish or evaluate a site, one must link its monitoring objectives to the physical location of the site. This can be done by matching the spatial scale, which represents the sample of air around the monitor where pollutant concentrations are reasonably uniform, with the most appropriate monitoring objective. Thus, spatial scale represents the physical dimensions of the air parcel around the monitor, and monitoring objective represents the overall purpose of the monitor. Combining the proper spatial scale with the monitoring objective explains why air monitoring sites are located in particular areas.

**Table 3 Spatial Measurement Scales**


Scale	Defined parameter (radius)
Micro Scale	0 to 100 meters
Middle Scale	100 to 500 meters
Neighborhood Scale	0.5 to 4 kilometers
Urban Scale	4 to 50 kilometers
Regional Scale	10 to 100s of kilometers

Since it is physically and fiscally impossible to monitor air quality in every location, representative samples must be obtained. The optimal locations for obtaining these samples are determined by using the monitoring objectives and the spatial measurement scales described above. For example, there might be numerous locations where the highest concentration of carbon monoxide may occur. Using these principles, only one or two sites will be established to represent all of the high-concentration areas. The same reasoning can be used for different types of pollutants. This does not mean that the number of monitoring sites is fixed. To the contrary, the network must be dynamic enough to maintain a current representative sample of the air quality.

## Overview of the MCAQD Network

The Phoenix Metropolitan Area has a population of over 3 million people (2000 US Census). The EPA has mandated a minimum number of monitors required to properly represent this population. MCAQD has designed its network, using the concepts of scale and objective mentioned previously, to meet and in most cases exceed these EPA requirements (see “Required General Information on Monitoring Network” in Appendix II).

Altogether, MCAQD operated a network of 24 monitoring sites in 2007. The following image details the location of these sites and gives the abbreviation symbols used by Maricopa County. Table 4 and Table 5, which follows, gives the AQS code assigned to each site and details which criteria pollutant is monitored at which site along with the monitor designation, respectively. Table 6 and Table 7 give more specific information about the location of the sites and the types and numbers of monitors at each site, respectively.

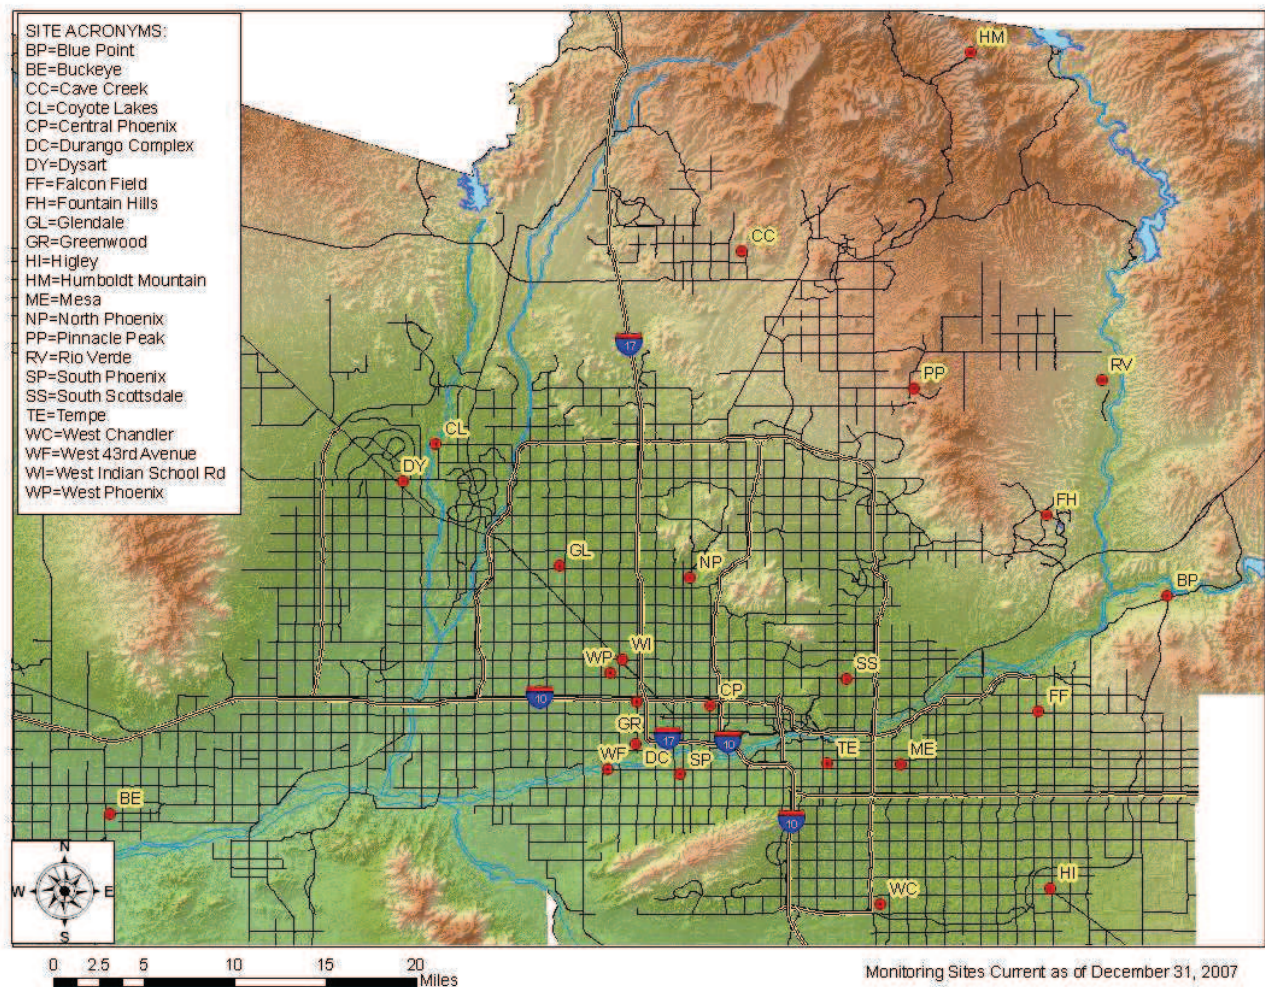

**Figure 1 Maricopa County Air Monitoring Sites for 2007**

**Table 4 Maricopa County Ambient Air Monitoring Sites for 2007**

Site Name	Site Abbr.	AQS Code
Blue Point	BP	04-013-9702
Buckeye	BE	04-013-4011
Cave Creek	CC	04-013-4008
Central Phoenix	CP	04-013-3002
Coyote Lakes	CL	04-013-4014
Durango Complex	DC	04-013-9812
Dysart	DY	04-013-4010
Falcon Field	FF	04-013-1010
Fountain Hills	FH	04-013-9704
Glendale	GL	04-013-2001
Greenwood	GR	04-013-3010
Higley	HI	04-013-4006

Site Name	Site Abbr.	AQS Code
Humboldt Mountain	HM	04-013-9508
Mesa	ME	04-013-1003
North Phoenix	NP	04-013-1004
Pinnacle Peak	PP	04-013-2005
Rio Verde	RV	04-013-9706
South Phoenix	SP	04-013-4003
South Scottsdale	SS	04-013-3003
Tempe	TE	04-013-4005
West Chandler	WC	04-013-4004
West 43 <sup>rd</sup> Ave.	WF	04-013-4009
W. Indian School Rd.	WI	04-013-0016
West Phoenix	WP	04-013-0019

**Table 5 Criteria Pollutants Monitored, by Site and Network**

Site	O <sub>3</sub>	CO	PM <sub>2.5</sub>	PM <sub>10</sub>	NO <sub>2</sub>	SO <sub>2</sub>
<b>Blue Point</b>	<b>SLAMS</b>					
<b>Buckeye</b>	<b>SLAMS</b>	<b>SLAMS</b>		<b>SLAMS</b>	<b>SLAMS</b>	
<b>Cave Creek</b>	<b>SLAMS</b>					
<b>Central Phoenix</b>	<b>SLAMS</b>	<b>SLAMS</b>		<b>SLAMS</b>	<b>SLAMS</b>	<b>SLAMS</b>
<b>Coyote Lakes</b>				<b>SP</b>		
<b>Durango Complex</b>			<b>SLAMS</b>	<b>SLAMS</b>		
<b>Dysart</b>	<b>SLAMS</b>	<b>SLAMS</b>		<b>SLAMS</b>		
<b>Falcon Field</b>	<b>SLAMS</b>					
<b>Fountain Hills</b>	<b>SLAMS</b>					
<b>Glendale</b>	<b>SLAMS</b>	<b>SLAMS</b>		<b>SLAMS</b>		
<b>Greenwood</b>		<b>SLAMS</b>		<b>SLAMS</b>	<b>SLAMS</b>	
<b>Higley</b>				<b>SLAMS</b>		
<b>Humboldt Mountain</b>	<b>SLAMS</b>					
<b>Mesa</b>		<b>SLAMS</b>	<b>SLAMS</b>	<b>SLAMS</b>		
<b>North Phoenix</b>	<b>SLAMS</b>	<b>SLAMS</b>		<b>SLAMS</b>		
<b>Pinnacle Peak</b>	<b>SLAMS</b>					
<b>Rio Verde</b>	<b>SLAMS</b>					
<b>South Phoenix</b>	<b>SLAMS</b>	<b>SLAMS</b>	<b>SLAMS</b>	<b>SLAMS</b>		
<b>South Scottsdale</b>	<b>SLAMS</b>	<b>SLAMS</b>		<b>SLAMS</b>	<b>SLAMS</b>	<b>SLAMS</b>
<b>Tempe</b>	<b>SLAMS</b>	<b>SLAMS</b>				
<b>West Chandler</b>	<b>SLAMS</b>	<b>SLAMS</b>		<b>SLAMS</b>		
<b>West 43<sup>rd</sup> Ave.</b>				<b>SLAMS</b>		
<b>W. Indian School Rd.</b>		<b>SLAMS</b>				
<b>West Phoenix</b>	<b>SLAMS</b>	<b>SLAMS</b>	<b>SLAMS</b>	<b>SLAMS</b>	<b>SLAMS</b>	

**Table 6 Site Location**

Site	Latitude	Longitude	Site Location	AQS Code
BP	33.54549	-111.60925	Usery Pass & Bush Highway	04-013-9702
BE	33.37005	-112.62070	MC85 & HWY 85	04-013-4001
CC	33.82169	-112.01739	32nd St. & Carefree Highway	04-013-4008
CP	33.45793	-112.04601	19th St & Roosevelt	04-013-3002
CL	33.66628	-112.31042	Beardsley Road and 115 <sup>th</sup> Ave.	04-013-4014
DC	33.42650	-112.11814	27th Ave. & Durango St.	04-013-9812
DY	33.63713	-112.34184	Bell Rd. & Dysart Rd.	04-013-4010
FF	33.45223	-111.73331	McKellips & Greenfield	04-013-1010
FH	33.61103	-111.72529	Palisades & Fountain Hills Blvd.	04-013-9704
GL	33.56936	-112.19153	59th Ave & W. Olive	04-013-2001
GR	33.46093	-112.11748	27th Ave. & Interstate 10	04-013-3010
HI	33.31074	-111.72255	Higley Rd. & Chandler Blvd	04-013-4006
HM	33.98280	-111.79870	Top of Humboldt Mountain	04-013-9508
ME	33.41045	-111.86507	Broadway Rd. & Alma School Rd.	04-013-1003
NP	33.56033	-112.06626	7th Street & Dunlap Avenue	04-013-1004
PP	33.71231	-111.85272	Pima Rd & Pinnacle Peak	04-013-2005
RV	33.71881	-111.67183	Forest Rd & Del Ray Ave.	04-013-9706
SP	33.40316	-112.07533	Central Ave. & Broadway	04-013-4003
SS	33.47968	-111.91721	Scottsdale Rd. & Thomas Rd.	04-013-3003
TE	33.4124	-111.93473	College Ave. & Apache Blvd.	04-013-4005
WC	33.29898	-111.88431	Ellis St. & Frye Rd.	04-013-4004
WF	33.40642	-112.14434	43 <sup>rd</sup> Ave. & Broadway Rd.	04-013-4009
WI	33.49462	-112.13098	33rd Ave. & Indian School Rd.	04-013-0016
WP	33.48385	-112.14257	39th Ave. & Earll Dr.	04-013-0019

Table 7 Site Instrument Setup

AIR MONITORING NETWORK OPERATIONS															
Sites	Wind Speed & Direction	O3	CO	NOX	SO2	Press	Delta Temp	Temp	Relative Humidity	Room Temp	Rain	Conti-uous		#Active Instruments	
												PM-2.5 Filter	PM-10 Filter		
BP	1	1						1		1				4	
BE	1	1*	1*	1	1			1	1	1			1	9	
CC	1	1*						1	1	1	1			6	
CL	1#				1			1					1	4	
CP	1	1	1	1	1			1		1			1	9	
DC	1				1			1				1	1	5	
DY	1	1*	1*					1	1	1				7	
FF	1	1*						1	1	1				5	
FH	1	1			1			1	1	1				6	
GL	1	1*	1*					1	1	1				7	
GR	1		1	1	1			1	1	1			1	7	
HI	1				1			1					1	5	
HM		1*						1	1	1				4	
ME	1		1*		1			1	1	1				9	
NP	1	1	1*		1			1	1	1		1	2	8	
PP	1	1								1				3	
RV		1*								1				2	
SP	1	1	1*		1			1	1	1			1**	9	
SS	1	1	1*	1	1			1	1	1				10	
TE	1	1	1*					1	1	1	1			7	
WC	1	1*	1*		1			1	1	1			1	8	
WF	1				1			1	1	1			1	6	
WI	1		1							1				3	
WP	1	1	1	1	1			1	1	1		1	2	12	
Active Instr.	22	17	13	5	2	14	5	21	10	21	2	2	9	8	155

\* = Instruments operate seasonally. \*\* = South Phoenix operated a filter-based PM-10 monitor from Jan-Jun, then a continuous PM-10 monitor from Jul-Dec. # = Coyote Lakes Wind monitors are not applicable for official standards, they are for reference only.

## 2007 SUMMARY OF NETWORK RESULTS AND REQUIRED INFORMATION

### Data Completeness

Before any data set can be considered valid it must first pass a data recovery test that consists of determining the ratio of actual samples to scheduled samples by quarter. This ratio must be greater than 75% for a data set to pass the first validity test. After all validation tests have been passed, the data can be used to determine compliance with the NAAQS.

The following is a summary of the annual data completeness for all criteria pollutants (Table 8). Note that CO, O<sub>3</sub>, NO<sub>2</sub>, and SO<sub>2</sub> samples are all from continuous monitors and are therefore hourly-averaged samples. PM monitors are either continuous, and therefore hourly-averaged, or filter-based and daily-averaged. Filters are sampled for 24 hours every 3<sup>rd</sup> day (PM<sub>2.5</sub>) or every 6<sup>th</sup> day (PM<sub>10</sub>).


**Table 8 2007 Criteria Pollutant Data Completeness**

	Number of Actual Samples	Number of Scheduled Samples	Data Completeness (Actual/Schedule)
Carbon Monoxide	79101	80832	97.9%
Ozone	114044	116304	98.1%
PM <sub>2.5</sub> (1 in 3 day)	423	436	97.0%
PM <sub>2.5</sub> (continuous)	16454	17520	93.9%
PM <sub>10</sub> (1 in 6 day)	416	420	99.0%
PM <sub>10</sub> (continuous)	71296	72336	98.6%
Nitrogen Dioxide	40843	43800	93.2%
Sulfur Dioxide	17056	17520	97.4%
<b>Total</b>	<b>339633</b>	<b>349168</b>	<b>97.3%*</b>

\*Note: the PM<sub>2.5</sub> (1 in 3 day) and total data completeness numbers do not match the numbers in the AQS data completeness report (AMP430). This is because some of the PM<sub>2.5</sub> samples were collected from the West Phoenix collocated monitor (POC 2) on unofficial sample days and the AMP430 report does not recognize them. AMP430 reports total data completeness as 97.0% instead of 97.3% as reported here.

## Criteria Pollutant Summary

### Carbon Monoxide (CO)

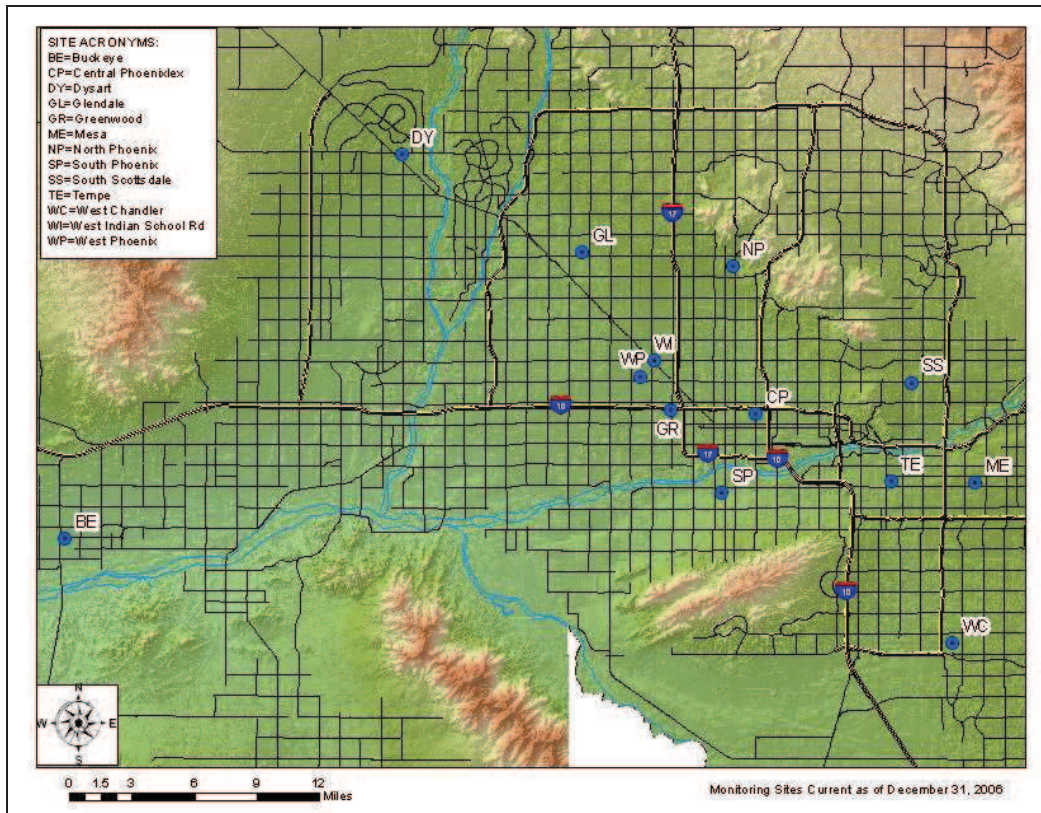

**Figure 2 2007 Carbon Monoxide Monitoring Sites**

During 2007, thirteen CO monitors were reported as operational to the USEPA Air Quality System (AQS) (Figure 2). All CO monitors are classified as SLAMS (Table 5).


There are two primary standards for CO, the 8-hour average and the 1-hour average. The 8-hour primary standard is 9 ppm and the 1-hour primary standard is 35 ppm. A violation of the standard is any two exceedances in a calendar year. For calendar year 2007, no exceedances of the CO 1-hour or 8-hour standards were recorded at any MCAQD monitoring sites (see Table 9).

**Table 9 2007 1-hour and 8-hour Average Carbon Monoxide Summary**

<b>Site</b>	<b>CO 1-hour Average Max. (PPM); Date: Hour</b>	<b>CO 1-hour Average 2<sup>nd</sup> High (PPM); Date: Hour</b>	<b>Number of Samples</b>	<b>CO 8-hour Average Max. (PPM); Date: Hour</b>	<b>CO 8-hour Average 2<sup>nd</sup> High (PPM); Date: Hour</b>	<b>Number of Exceedances of 1/8-Hour average</b>
Buckeye	<b>3.9; 02/15:10</b>	<b>1.6; 03/14:09</b>	5017	<b>1.0; 02/15:11</b>	<b>0.8; 03/14:10</b>	0
C. Phoenix	<b>4.1; 01/15:07</b>	<b>4.0; 01/08:08</b>	8594	<b>2.9; 01/14:01</b>	<b>2.9; 11/18:00</b>	0
Dysart	<b>6.8; 11/08:18</b>	<b>1.8; 11/15:07</b>	4996	<b>2.2; 11/08:20</b>	<b>1.3; 11/15:10</b>	0
Glendale	<b>4.3; 12/16:22</b>	<b>3.7; 09/17:09</b>	5027	<b>1.8; 12/25:02</b>	<b>1.6; 11/09:02</b>	0
Greenwood	<b>5.7; 09/12:16</b>	<b>4.6 01/18:08</b>	8548	<b>4.0; 12/07:08</b>	<b>3.0; 01/11:09</b>	0
Mesa	<b>3.9; 01/22:14</b>	<b>2.5; 01/22:15</b>	4964	<b>2.0; 01/22:20</b>	<b>2.0; 12/25:04</b>	0
N. Phoenix	<b>3.4; 01/10:08</b>	<b>3.0; 01/29:07</b>	4904	<b>1.7; 01/10:11</b>	<b>1.6; 01/29:11</b>	0
S. Phoenix	<b>4.9; 10/27:21</b>	<b>4.3; 01/08:08</b>	5021	<b>3.1; 12/25:02</b>	<b>2.3; 12/24:23</b>	0
South Scottsdale	<b>2.7; 01/02:08</b>	<b>2.6; 02/07:19</b>	4917	<b>1.6; 01/14:01</b>	<b>1.6; 11/18:00</b>	0
Tempe	<b>7.4; 11/28:14</b>	<b>3.2; 12/26:14</b>	4971	<b>2.0; 11/28:19</b>	<b>1.9; 01/04:03</b>	0
West Chandler	<b>2.7; 01/01:01</b>	<b>2.4; 01/01:00</b>	4994	<b>1.6; 01/01:05</b>	<b>1.5; 02/10:01</b>	0
W. Indian School	<b>6.2; 01/18:07</b>	<b>5.7; 01/16:07</b>	8495	<b>5.0; 01/01:05</b>	<b>3.9; 01/15:09</b>	0
W. Phoenix	<b>6.0; 01/17:08</b>	<b>6.0; 01/18:07</b>	8653	<b>4.6; 01/01:05</b>	<b>4.1; 12/25:03</b>	0

Note: this table is read as the bold number representing the data followed by the date and time, e.g. the maximum 1-hour averaged CO reading at the Buckeye site was 3.9 PPM on February 15 in the 10 o'clock hour.

## Ozone (O<sub>3</sub>)

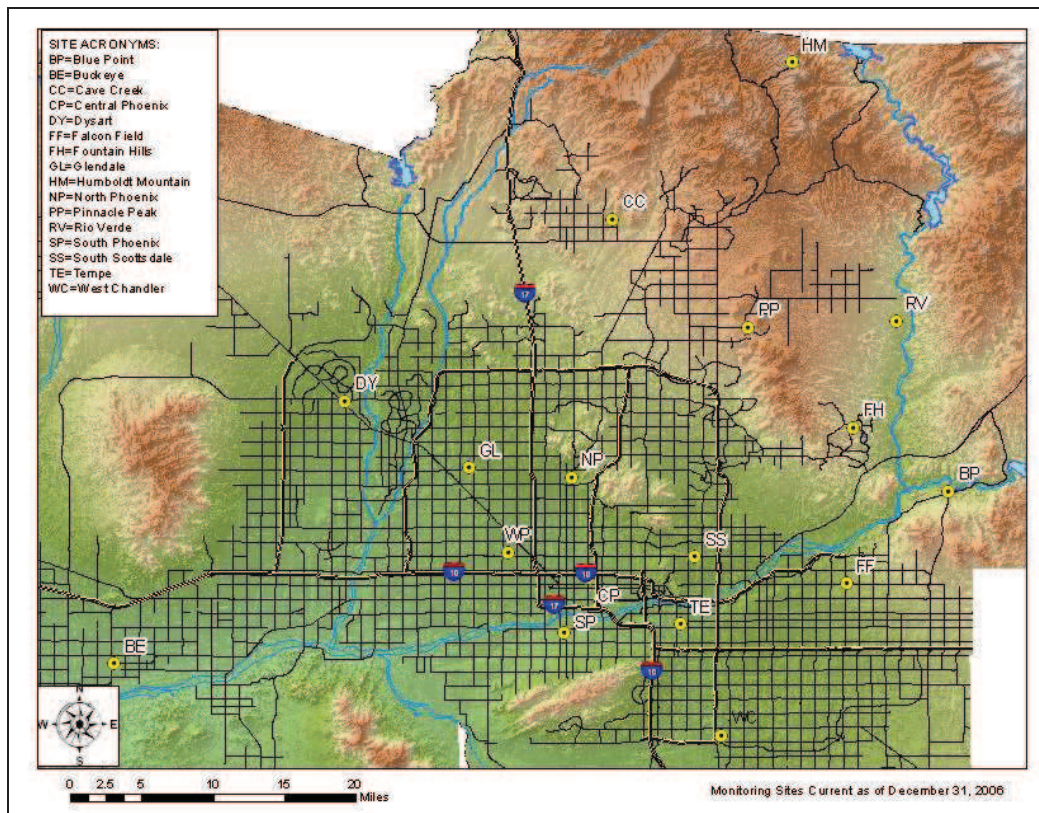

**Figure 3 2007 Ozone Monitoring Sites**

During 2007, seventeen ozone monitors were reported as operational in AQS (Figure 3). All of the ozone monitors are classified as SLAMS (Table 5). The 1-hour average ozone standard was revoked by the EPA on June 15, 2005, and has been replaced by the 8-hour average standard for compliance purposes.

The eight-hour primary standard for ozone is 0.08 ppm. Compliance with the standard is determined by averaging the 4<sup>th</sup> highest eight-hour average over a three-year period. This three-year average must be less than or equal to 0.08 ppm.

There were no exceedances of the eight hour primary standard for ozone in 2007 (due to mathematical rounding, an exceedance is any eight hour average >0.085 ppm). Table 10 presents the 2007 data summary for eight-hour ozone at MCAQD monitoring sites. Also in 2007, there were no violations of the eight-hour primary standard (the 8-hour average NAAQS for ozone is violated when the three-year average of the fourth high is greater than 0.08 (0.085 with rounding) ppm; however several sites came very close to violating the standard (Table 11).

**Table 10 2007 8-hour Average Ozone Summary**

<b>Site</b>	<b>8-hour max. (PPM); Date: Hour</b>	<b>2<sup>nd</sup> High (PPM); Date: Hour</b>	<b>3<sup>rd</sup> High (PPM); Date: Hour</b>	<b>4<sup>th</sup> High (PPM); Date: Hour</b>	<b>Number of Days ≥ 0.085</b>
Blue Point	<b>.066</b> ; 08/14:12	<b>.066</b> ; 08/15:11	<b>.059</b> ; 05/11:10	<b>.058</b> ; 06/07:11	0
Buckeye	<b>.066</b> ; 05/10:11	<b>.066</b> ; 07/17:10	<b>.064</b> ; 06/07:12	<b>.064</b> ; 06/08:10	0
Cave Creek	<b>.083</b> ; 05/11:11	<b>.079</b> ; 05/17:12	<b>.079</b> ; 07/05:12	<b>.077</b> ; 05/24:11	0
Central Phoenix	<b>.073</b> ; 07/22:10	<b>.073</b> ; 08/15:11	<b>.070</b> ; 08/08:12	<b>.070</b> ; 08/28:11	0
Dysart	<b>.069</b> ; 08/31:11	<b>.069</b> ; 09/11:11	<b>.068</b> ; 08/15:11	<b>.065</b> ; 07/11:08	0
Falcon Field	<b>.080</b> ; 08/15:10	<b>.074</b> ; 08/11:13	<b>.074</b> ; 08/14:11	<b>.073</b> ; 07/04:10	0
Fountain Hills	<b>.083</b> ; 08/15:12	<b>.078</b> ; 08/14:10	<b>.074</b> ; 05/10:10	<b>.074</b> ; 05/11:10	0
Glendale	<b>.075</b> ; 05/11:11	<b>.075</b> ; 07/22:09	<b>.074</b> ; 07/17:10	<b>.071</b> ; 04/29:11	0
Humboldt Mt.	<b>.080</b> ; 05/24:16	<b>.079</b> ; 06/07:21	<b>.079</b> ; 08/08:18	<b>.078</b> ; 05/11:13	0
North Phoenix	<b>.081</b> ; 05/11:11	<b>.081</b> ; 08/15:11	<b>.080</b> ; 05/17:11	<b>.078</b> ; 07/22:10	0
Pinnacle Peak	<b>.076</b> ; 05/11:13	<b>.076</b> ; 08/14:11	<b>.075</b> ; 08/08:15	<b>.075</b> ; 08/15:12	0
Rio Verde	<b>.082</b> ; 05/11:11	<b>.082</b> ; 08/15:11	<b>.080</b> ; 05/10:11	<b>.079</b> ; 05/24:13	0
South Phoenix	<b>.079</b> ; 08/15:10	<b>.077</b> ; 05/11:11	<b>.073</b> ; 05/10:11	<b>.072</b> ; 08/14:10	0
South Scottsdale	<b>.082</b> ; 08/15:11	<b>.077</b> ; 06/23:10	<b>.077</b> ; 07/06:10	<b>.077</b> ; 08/14:10	0
Tempe	<b>.084</b> ; 08/15:11	<b>.077</b> ; 06/23:11	<b>.077</b> ; 08/14:11	<b>.076</b> ; 07/06:11	0
West Chandler	<b>.084</b> ; 08/15:10	<b>.079</b> ; 08/16:11	<b>.074</b> ; 07/06:11	<b>.072</b> ; 07/04:10	0
West Phoenix	<b>.079</b> ; 05/11:11	<b>.077</b> ; 07/22:09	<b>.076</b> ; 08/15:11	<b>.074</b> ; 05/17:11	0


Note: this table is read as the bold number representing the data followed by the date and time, e.g. the maximum 8-hour averaged ozone reading at the Blue Point site was .066 PPM on August 14 during the 12 o'clock hour.

**Table 11 3 Year Average of 8-Hour Ozone**

<b>Site</b>	<b>2005 4<sup>th</sup> High (PPM)</b>	<b>2006 4<sup>th</sup> High (PPM)</b>	<b>2007 4<sup>th</sup> High (PPM)</b>	<b>3 Yr. Avg. of 4<sup>th</sup> High (PPM)*</b>
Blue Point	0.081	.079	0.058	0.072
Buckeye	0.065	.067	0.064	0.065
Cave Creek	0.082	.080	0.077	0.079
Central Phoenix	0.078	.080	0.07	0.076
Dysart	0.066	.072	0.065	0.067
Falcon Field	0.076	.079	0.073	0.076
Fountain Hills	0.088	.084	0.074	0.082
Glendale	0.076	.078	0.071	0.075
Humboldt Mt.	0.087	.079	0.078	0.081
North Phoenix	0.084	.085	0.078	0.082
Pinnacle Peak	0.083	.076	0.075	0.078
Rio Verde	0.087	.083	0.079	0.083
South Phoenix	0.076	.069	0.072	0.072
South Scottsdale	0.077	.080	0.077	0.078
Tempe	0.076	.079	0.076	0.077
West Chandler	0.075	.081	0.072	0.076
West Phoenix	0.068	.082	0.074	0.074

\*Note that this average value has been truncated (not rounded) to the third significant digit.

## Particulate Matter <=10 Microns (PM<sub>10</sub>)

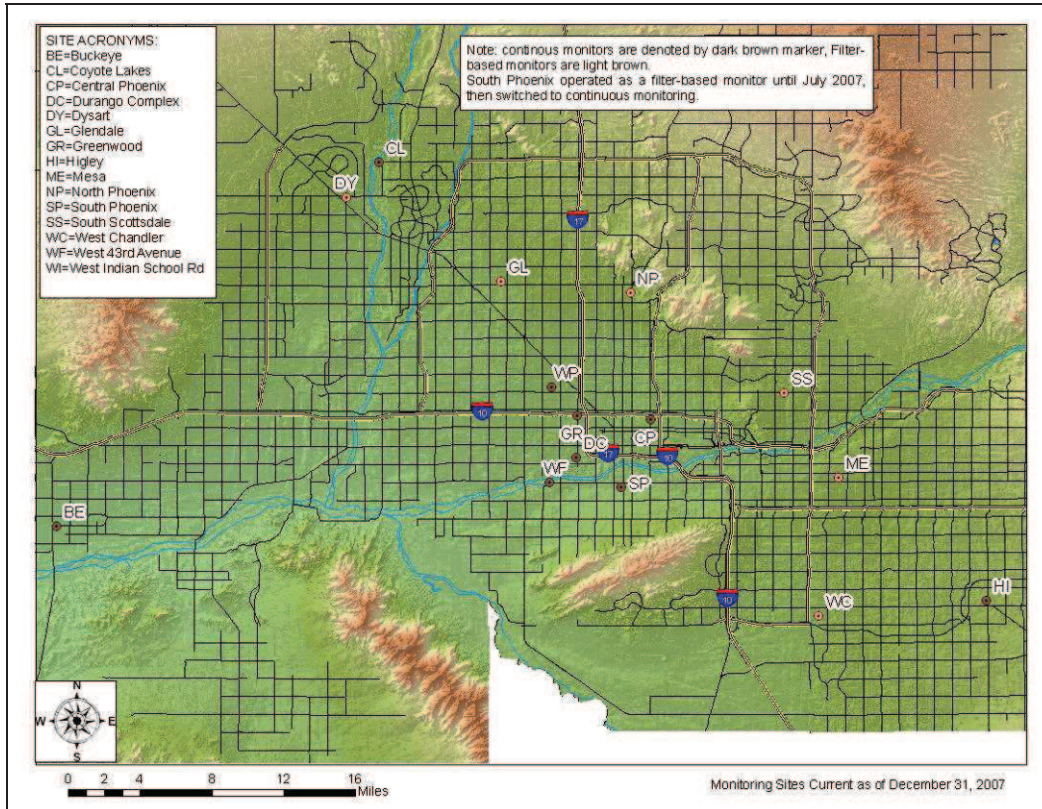

**Figure 4 2007 PM<sub>10</sub> Monitoring Sites (includes continuous and non-continuous sites)**

During 2007, fifteen PM<sub>10</sub> monitors were reported as operational in AQS (Figure 4). All PM<sub>10</sub> monitors are classified as SLAMS; except for Coyote Lakes which is classified as a Special Purpose (SP) monitor (Table 5). Note that the South Phoenix site operated a filter-based PM-10 monitor from January to June 2007 and a continuous PM-10 monitor from July to December 2007. However, due to a constraint within AQS, data continued to be inserted into AQS as daily averages, rather than hourly averages, after switching to the continuous monitor. This continued until the end of the year; on January 1, 2008 the South Phoenix PM-10 monitor was switched to an hourly collection schedule in AQS. The hourly continuous monitoring data from South Phoenix was also entered into AQS under an alternate monitor number (POC 2).

The 24-hour Primary standard for PM<sub>10</sub> is 150 µg/m<sup>3</sup> (155 µg/m<sup>3</sup> with mathematical rounding). This standard is violated when the expected number of exceedance for the calendar year is more than one. A formula, as detailed in 40 CFR 50, is used to determine the expected number of exceedances. The formula takes into account the number of days sampling occurred and the number of valid samples collected. A 3-year average of these estimated days is then used to determine compliance. On December 18, 2006 new monitoring rules from the EPA revoked the PM<sub>10</sub> annual primary standard, although the annual average is still displayed below for informational purposes (Table 12).

For calendar year 2007, there were eight sites that exceeded the PM<sub>10</sub> 24-hour standard, and there were seven sites that violated the PM<sub>10</sub> 24-hour standard (described in Table 20 and Table 21).

**Table 12 2007 PM<sub>10</sub> Summary**

Site Name	24-hr Average Max (µg/m <sup>3</sup> )	24-hr Average 2 <sup>nd</sup> High (µg/m <sup>3</sup> )	Number of 24-hour NAAQS Exceedances	Expected Exceedances	Annual Average (µg/m <sup>3</sup> )	#Exceptional Events	Number of Samples
Buckeye (continuous)	195*	166*	2	2	52.5	2	8666
Central Phoenix (continuous)	267*	149	1	1	42.4	1	8680
Coyote Lakes (continuous)	313*	273*	2	2	47.8#	2	6529#
Durango Complex (continuous)	155*	152	1	1	59.5	1	8589
Dysart	111	94	0	0	35.9	0	58
Glendale	92	74	0	0	34.1	0	58
Greenwood (continuous)	124	123	0	0	50.0	0	8654
Higley (continuous)	230*	199*	5	5.1	53.0	5	8468
Mesa	110	70	0	0	32.3	0	60
North Phoenix	78	77	0	0	33.5	0	60
South Phoenix	171*	160*	2	7.5	55.6	2	214
South Scottsdale	73	61	0	0	30.6	0	60
West Chandler	104	99	0	0	36.4	0	60
West 43 <sup>rd</sup> Ave (continuous)	227*	225*	6	6	71.8	6	8651
West Phoenix (continuous)	124	116	0	0	47.0	0	8686


\*Indicates an exceedance of the standard.

# Indicates <75% data recovery.

Note that some data have either been, or are in the process of being, classified as exceptional events (see Definition of Terms for explanation of exceptional events). In accordance with the EPA's exceptional events policy, once approved these data are not used in determining compliance with the NAAQS. Values in Table 12 are from official AQS reports as of the date of publishing this review; exceptional events that have not yet been approved by the EPA will not affect these values until they are approved. The process of approving exceptional events can take over a year after the exceedance day, so some values in Table 12 will change upon EPA approval.

On July 2, 2002 (67 FR 44369), EPA found the state implementation plan (SIP) for the Metropolitan Phoenix (Maricopa County), Arizona serious PM<sub>10</sub> non-attainment area to be inadequate to attain the 24-hour particulate (PM<sub>10</sub>) air quality standard at the Salt River monitoring site. Under authority from the Clean Air Act, EPA has required a SIP revision to be submitted by the State of Arizona to correct the inadequacy. In 2004 the Arizona Department of Environmental Quality submitted a SIP addressing the inadequacies in the Salt River Area to the EPA. As of December 31, 2007, Maricopa County has not come into compliance with the NAAQS for PM<sub>10</sub>. As a result of this, the EPA is requiring a 5% plan to begin in 2008. This required Maricopa County to submit an approved plan to reduce the annual PM<sub>10</sub> emissions of Maricopa County by 5% until the standard is met. Failure to comply with this plan or to meet the NAAQS for PM<sub>10</sub> will result in further 5% reductions annually, and could result in sanctions from the EPA.

## Particulate Matter $\leq 2.5$ Microns ( $PM_{2.5}$ )

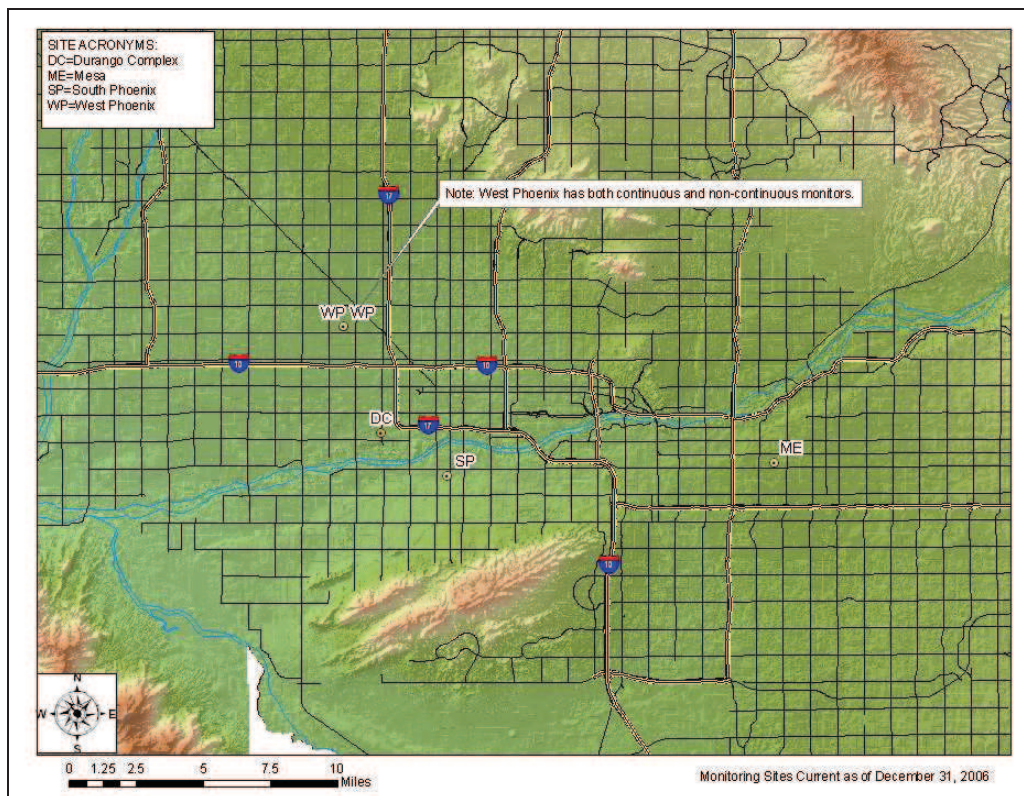

**Figure 5 2007  $PM_{2.5}$  Monitoring Sites (continuous and non-continuous)**

Currently, MCAQD operates collocated compliance  $PM_{2.5}$  monitors at the West Phoenix site (04-013-0019) and single monitors at the Mesa site (04-013-1003) and the South Phoenix site (04-013-4003) (Figure 5). These compliance  $PM_{2.5}$  monitors all use sample filters and are non-continuous in nature. On July 1, 2007, MCAQD took over weighing the sample filters, a process that was previously done by the ADEQ. All filters are processed and weighed in our newly installed laboratory. In addition to the filter-based monitors, MCAQD operates two continuous  $PM_{2.5}$  monitors at the Durango (04-013-9812) and West Phoenix (04-013-0019) sites. These continuous monitors are FDMS-TEOMs, which are not federal reference or equivalent methods; therefore the data collected from them is not used for compliance purposes. All monitors are identified as SLAMS (Table 5).

Note that the  $PM_{2.5}$  network is much smaller than the  $PM_{10}$  network. The reason for this is that historically more concern and resources have been given to  $PM_{10}$  since Maricopa County is not in attainment for this pollutant (Maricopa County is currently in attainment for  $PM_{2.5}$ ). According to federal regulations, Maricopa County operates the required minimum number of  $PM_{2.5}$  monitors for the MSA. The Air Monitoring Division is currently in the process of determining if the existing network adequately represents the air quality ( $PM_{2.5}$ ) in Maricopa County. After completing the process, Maricopa County may increase the number of monitors. Additionally, emphasis will be given to deploying continuous monitors.

On December 18, 2006, the EPA implemented new primary standards for  $PM_{2.5}$ . These new rules changed the 24-hour average standard from  $65 \mu\text{g}/\text{m}^3$  to  $35 \mu\text{g}/\text{m}^3$ . The annual average standard of  $15 \mu\text{g}/\text{m}^3$  remains unchanged. Compliance with the 24-hour standard is determined by taking the 3-year average of the 98th percentile at each monitoring site. Compliance with the Annual standard is determined by taking the 3-year average of the spatially averaged annual means. There were no exceedances or violations of the 24-hour or Annual  $PM_{2.5}$  standards in 2007. Data is summarized in Table 13 and Table 14 (note that continuous data in Table 14 is not used for

compliance purposes, it is only shown here for comparison purposes). Averages used for determining compliance with the NAAQS are shown in Table 15 and Table 16.

**Table 13 2007 PM<sub>2.5</sub> Summary (FRM Monitors)**

Site Name	24-hr Avg. Max (µg/m <sup>3</sup> )	24-hr Avg. 2 <sup>nd</sup> High (µg/m <sup>3</sup> )	98 <sup>th</sup> Percentile Value	Annual Avg. (µg/m <sup>3</sup> )	Number of Samples
Mesa	24.3	19.7	18.3	9.72	117
South Phoenix	32.2	30.3	29.2	12.27	118
West Phoenix	33.0	31.3	27.2	10.89	119

**Table 14 2007 PM<sub>2.5</sub> Data Summary (Continuous Monitors)**

Site Name	24-hr Avg. Max (µg/m <sup>3</sup> )	24-hr Avg. 2 <sup>nd</sup> High (µg/m <sup>3</sup> )	98 <sup>th</sup> Percentile Value	Annual Avg. (µg/m <sup>3</sup> )	Number of Samples
Durango Complex (continuous)	59.75	41.62	30.75	14.20	7824
West Phoenix (continuous)	73.64	63.95	35.71	13.60	8630

Note that data from our continuous monitors are not accepted for compliance purposes. This data is displayed here for comparison purposes only.

**Table 15 2007 PM<sub>2.5</sub> 3-Year Averages of 98<sup>th</sup> Percentile (FRM Monitors)**


Site Name	2005 98 <sup>th</sup> Percentile Value	2006 98 <sup>th</sup> Percentile Value	2007 98 <sup>th</sup> Percentile Value	98 <sup>th</sup> Percentile 3-Year Average
Mesa	17.5	20.1	18.3	18.63
South Phoenix	36.4	28.8	29.2	31.47
West Phoenix	40.5	28.8	27.2	32.17

**Table 16 2007 PM<sub>2.5</sub> 3-Year Averages of Annual Means (FRM Monitors)**

Site Name	2005 Annual Mean	2006 Annual Mean	2007 Annual Mean	3-Year Average of the Annual Mean
Mesa	8.92#	9.66	9.72	N/A
South Phoenix	12.84	12.69	12.27	12.60
West Phoenix	12.91	13.52	10.89	12.44

# Indicates <75% data availability.

## Nitrogen Dioxide (NO<sub>2</sub>)

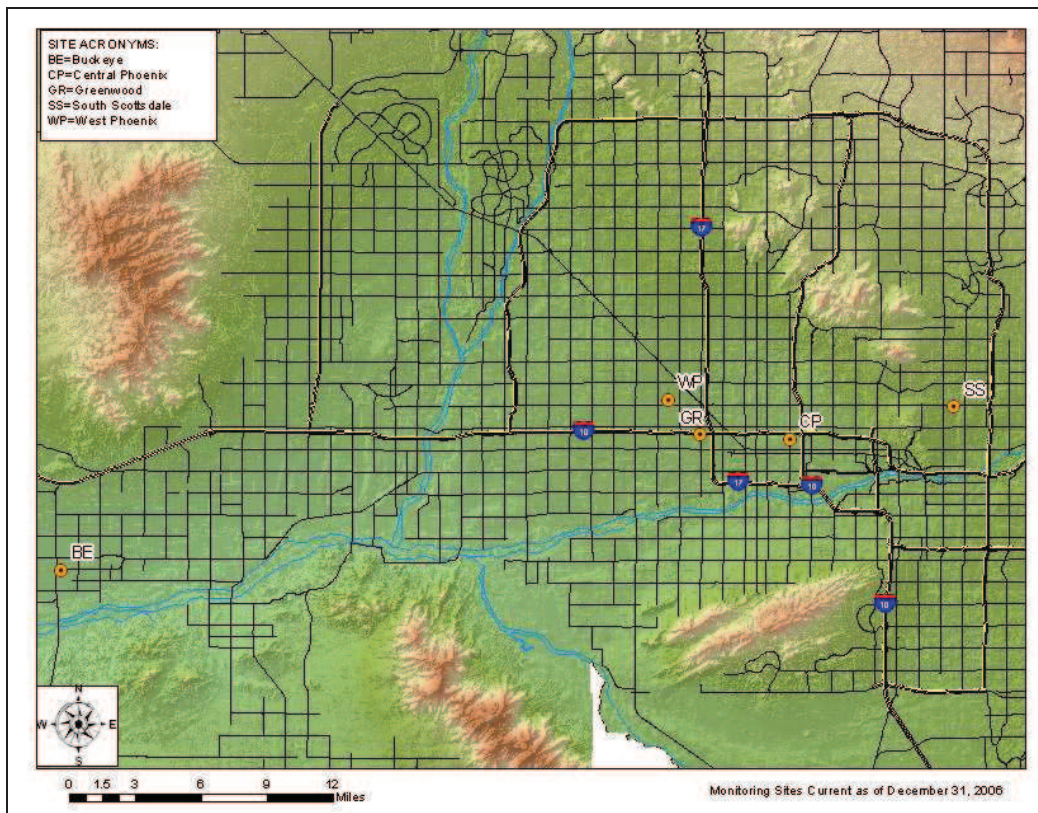

**Figure 6 2007 Nitrogen Dioxide Monitoring Sites**


All parts of Maricopa County are in attainment for nitrogen dioxide. During 2007, five NO<sub>2</sub> monitors were operational and were reported in AQS (Figure 6). All NO<sub>2</sub> monitors are designated as SLAMS (see Table 5).

Compliance with the NO<sub>2</sub> standard is achieved when the annual arithmetic mean concentration in a calendar year is less than or equal to 0.053 ppm, rounded to three decimal places. For calendar year 2007, no exceedances of the NO<sub>2</sub> annual standard were recorded at MCAQD monitoring sites (Table 17).

**Table 17 2007 Nitrogen Dioxide Summary**

Site	NO <sub>2</sub> Avg. 1-hour Max. (PPM); Date: Hour	NO <sub>2</sub> Avg. 1-hour 2nd High (PPM); Date: Hour	Number of 1-hour Samples	Annual Average (PPM)
Buckeye	.069; 08/27:14	.052; 12/06:17	7337	.0102
Central Phoenix	.077; 03/17:19	.076; 01/18:09	8520	.0237
Greenwood	.094; 01/16:08	.091; 01/08:07	8427	.0290
South Scottsdale	.068; 11/06:18	.064; 03/15:19	8137	.0163
West Phoenix	.082; 01/02:08	.079; 11/28:17	8422	.0209

## Sulfur Dioxide (SO<sub>2</sub>)

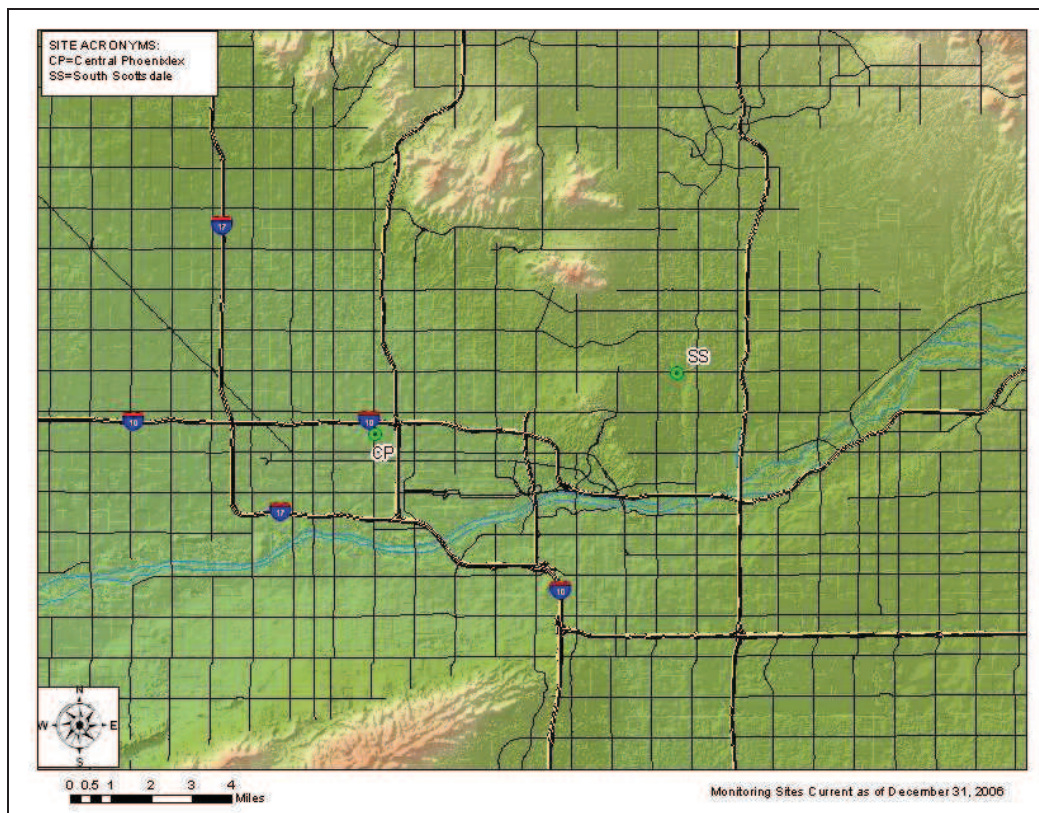

**Figure 7 2007 Sulfur Dioxide Monitoring Sites**

Maricopa County is in attainment for SO<sub>2</sub>. During 2007, two SO<sub>2</sub> monitors were operational and were reported in AQS (Figure 7). Both of these monitors were designated SLAMS (see Table 5).

Sulfur Dioxide has an Annual and 24-hour average primary standard and a 3-hour average secondary standard. A violation of the primary standard occurs when the annual mean exceeds 0.030 ppm or when a 24-hour average of 0.14 ppm is exceeded more than once per calendar year. A violation of the 3-hour average secondary standard occurs when a 3-hour average of 0.5 ppm is exceeded more than once per year. For calendar year 2007, no exceedances of the SO<sub>2</sub> Annual, 24-hour, or 3-hour standard were recorded at Maricopa County monitoring sites (see Table 18).

**Table 18 2007 Sulfur Dioxide Summary**

Site	1-hour Max. (PPM); Date: Hour	1-hour 2nd High (PPM); Date: Hour	3-hour Max. (PPM); Date: Hour	3-hour 2nd High (PPM); Date: Hour	24-hour Max. (PPM); Date: Hour	24-hour 2nd High (PPM); Date: Hour	Annual Avg. (PPM)	Number of Samples
Central Phoenix	.065; 10/29:17	.046; 02/06:10	.011; 01/15:08	.009; 01/08:08	.007; 02/06:23	.005; 01/08:23	.0015	8625
South Scottsdale	.010; 06/13:08	.009; 07/16:08	.006; 02/07:20	.006; 02/22:20	.005; 02/22:23	.004; 02/15:23	.0019	8431

## 2007 NAAQS Exceedance and Violation Summary

The following is a summary of the number, types and dates of exceedances and violations of the NAAQS for 2007 (Table 19).

**Table 19 2007 NAAQS Exceedances and Violations Summary**

<b>Carbon Monoxide</b>	No exceedances or violations of the 1-hr or 8-hr NAAQS standard were logged.
<b>Nitrogen Dioxide</b>	No exceedances or violations of NAAQS were logged.
<b>Ozone</b>	No exceedances or violations of the NAAQS were logged.
<b>PM<sub>10</sub></b>	There were 11 unique days when at least one monitor exceeded the standard. There were 19 individual exceedances of the 24-hour standard which occurred at 7 different sites. There were 7 violations of the 24-hour standard.
<b>PM<sub>2.5</sub></b>	No exceedances or violations of the NAAQS were logged.
<b>Sulfur Dioxide</b>	No exceedances or violations of NAAQS were logged.

Table 20 details all of the site and dates of the 24-hour PM<sub>10</sub> standard. Note that this table includes all exceedances, even those that have been or are in the process of being classified as exceptional events. Exceptional events are not used in calculating compliance with the NAAQS.

**Table 20 2007 PM<sub>10</sub> 24-hour Average Exceedance Details**

Site	Date	Value (µg/m <sup>3</sup> )
Buckeye	07/19	195*
	11/15	166*
Central Phoenix	07/19	267*
Coyote Lakes	07/19	273*
	10/21	313*
Durango Complex	11/15	155*
Higley	06/06	181*
	07/19	199*
	08/16	195*
	08/23	230*
	10/24	174*
South Phoenix	04/12	171*
	08/13	160*
West 43 <sup>rd</sup> Avenue	03/27	227*
	04/12	202*
	05/04	197*
	06/06	225*
	07/19	178*
	08/16	215*

\*This value has been entered as an exceptional event. EPA concurrence with the exceptional event is pending.  
Note: Exceedance is any 24-hour average with value  $\geq 155$  µg/m<sup>3</sup>.

## 2007 Violations of the 24-Hour PM<sub>10</sub> Standard

The 24hr NAAQS for particulates is violated when the rate of expected occurrence of exceedances (samples greater than or equal to 155 µg/m<sup>3</sup>) is greater than one over three consecutive years (Table 21) (40 CFR Part 50.6 (a)).

**Table 21 Violations of the 24-hr PM<sub>10</sub> Standard**

Site	2005		2006		2007		Rate of Expected Exceedances
	24-hr Max. (µg/m <sup>3</sup> )	Expected Exceedances	24-hr Max. (µg/m <sup>3</sup> )	Expected Exceedances	24-hr Max. (µg/m <sup>3</sup> )	Expected Exceedances	
Buckeye	169	2	272*	3	195*	2	2.3
Central Phoenix	116	0	134*	0	267*	1	0.3
Coyote Lakes	N/A	N/A	N/A	N/A	313#*	2#	#
Durango Complex	206	13	240*	9	155*	1	7.6
Dysart	76	0	67	0	111	0	0
Glendale	84	0	60	0	92	0	0
Greenwood	173	6	166*	1	124	0	2.3
Higley	142	0	177*	2.1	230*	5.1	2.4
Mesa	86	0	75	0	110	0	0
North Phoenix	81	0	79	0	78	0	0
South Phoenix	147	0	132	0	171*	7.5	2.5
South Scottsdale	121	0	76	0	73	0	0
West Chandler	94	0	77	0	104	0	0
West 43rd Avenue	233	13.1	260*	18.7	227*	6	12.6
West Phoenix	155	6	147*	0	124	0	2.0

■ Indicates violation of the standard.

# Indicates <75% data available.

\* Indicates Exceptional Events occurred at this site. The listed value is the highest official AQS reading at time of publication.

### Exceptional Events

Table 21 lists the official records in AQS (at time of publication) for exceedances and violations. However, as has been previously noted, some of these 2007 exceedance days have been requested to be classified as exceptional events and a request has been sent to the EPA to remove them from official consideration as compliance data. EPA approval of these requests can take over a year; as of the time of this writing none of the requests have yet been approved. The following table (Table 22) lists the exceedance and violation summary for PM-10 sites provided that all exceptional event requests are approved.

**Table 22 2007 PM-10 Violations Following Expected Approval of Exceptional Events**

Site	Current AQS 2007 24-hr max ( $\mu\text{g}/\text{m}^3$ )	Projected 2007 24-hr max if events approved ( $\mu\text{g}/\text{m}^3$ )	Current AQS 2007 Expected Exceedances	Projected 2007 Expected Exceedances (Approx.)	Projected Rate of Exceedances (2005-2007)
Buckeye	195‡	152	2	0	1.66
Central Phoenix	267‡	149	1	0	0
Coyote Lakes	313#‡	125	2#	0	#
Durango Complex	155‡	152	1	0	7.33
Dysart	111	111	0	0	0
Glendale	92	92	0	0	0
Greenwood	124	124	0	0	2.3
Higley	230‡	150	5.1	0	0.7
Mesa	110	110	0	0	0
North Phoenix	78	78	0	0	0
South Phoenix	171‡	144	7.5	0	0
South Scottsdale	73	73	0	0	0
West Chandler	104	104	0	0	0
West 43rd Avenue	227‡	154	6	0	10.6
West Phoenix	124	124	0	0	2.0

■ Indicates violation of the standard.

# Indicates <75% data available.

‡ Indicates Exceptional Events occurred at this site.

## Pollution Trends

The following charts depict the most recent three-year trends (2005–2007) for each criteria pollutant. See Table 4 for explanations of site abbreviations.

### Carbon Monoxide

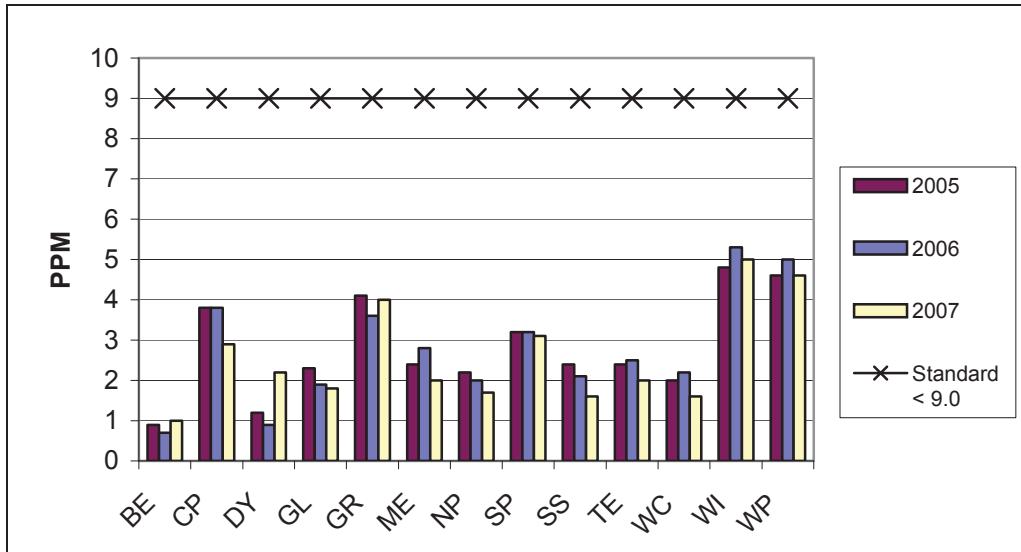


Chart 1 2005-2007 8-hr Avg. Carbon Monoxide Maximum Values

### Nitrogen Dioxide



Chart 2 2005-2007 Nitrogen Dioxide Annual Average Readings

## Ozone

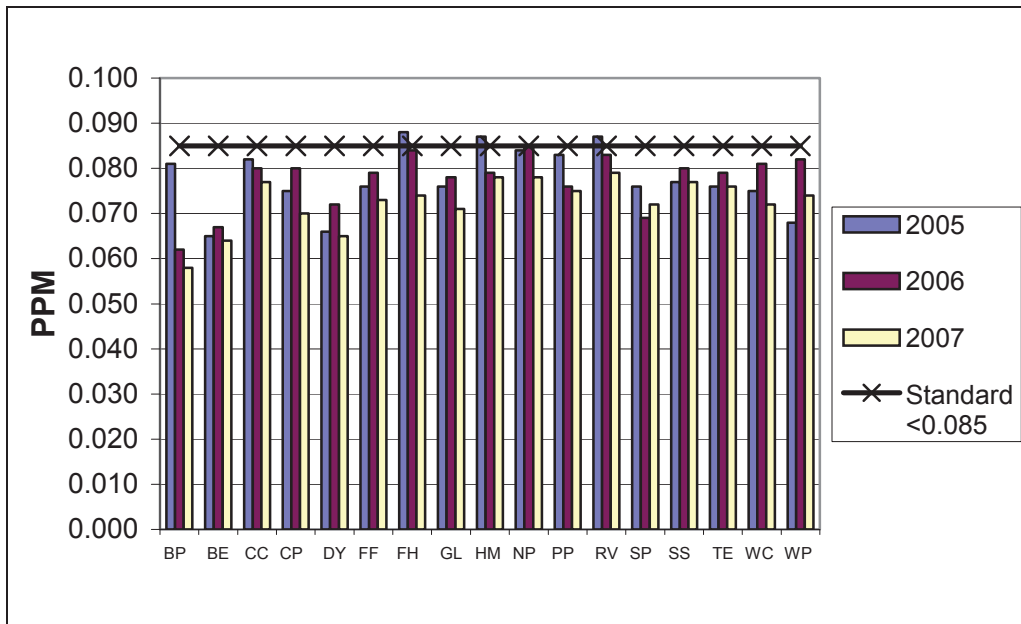


Chart 3 2005-2007 Ozone 4th high 8-hr Average

## Particulates

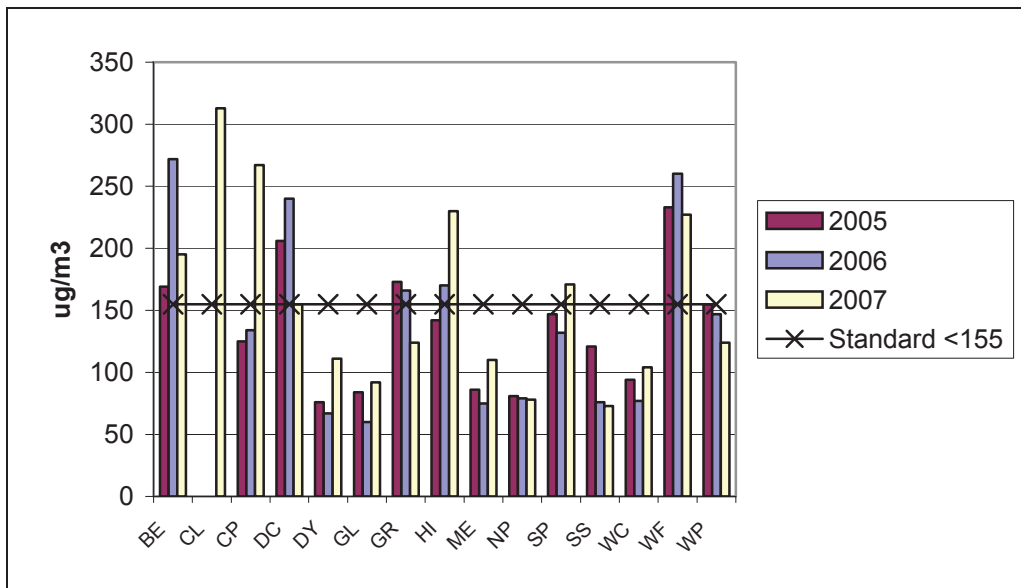


Chart 4 2005-2007 PM<sub>10</sub> 24-hr Average Maximum Values

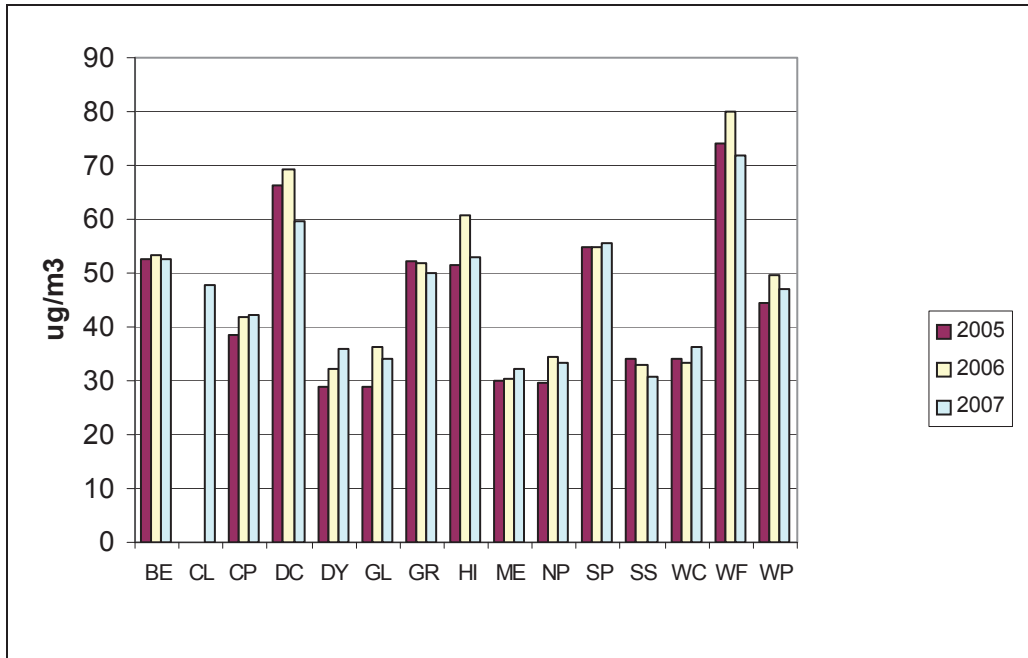


Chart 5 2005-2007 PM<sub>10</sub> Annual Average

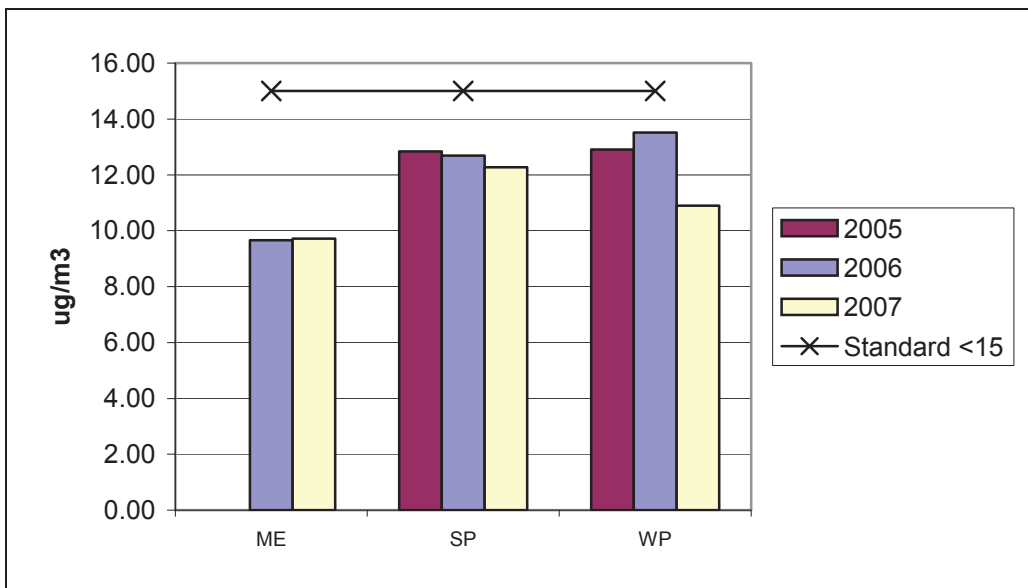


Chart 6 2005-2007 PM<sub>2.5</sub> Annual Average

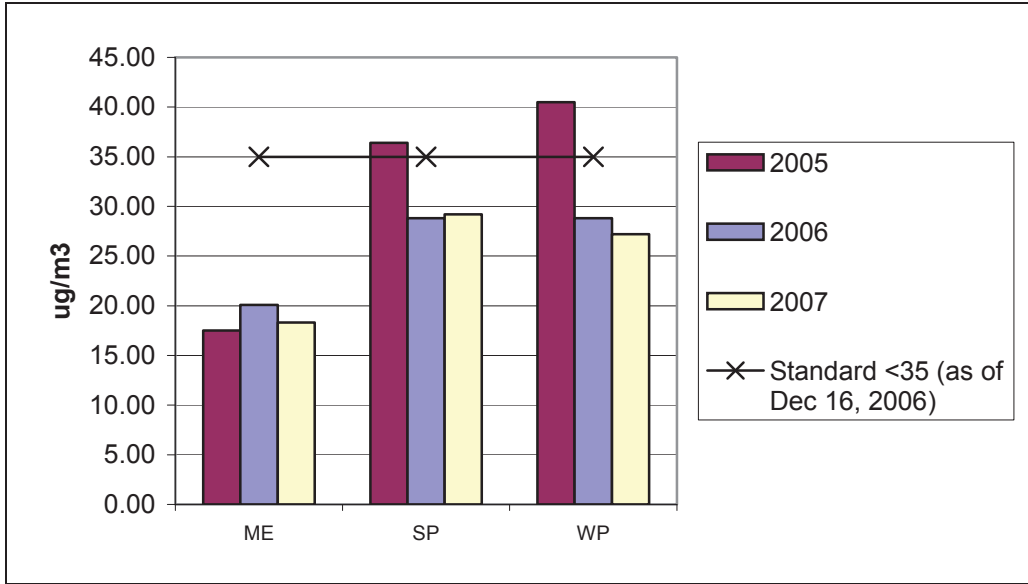


Chart 7 2005-2007 PM<sub>2.5</sub> 98<sup>th</sup> Percentile

**Sulfur Dioxide**

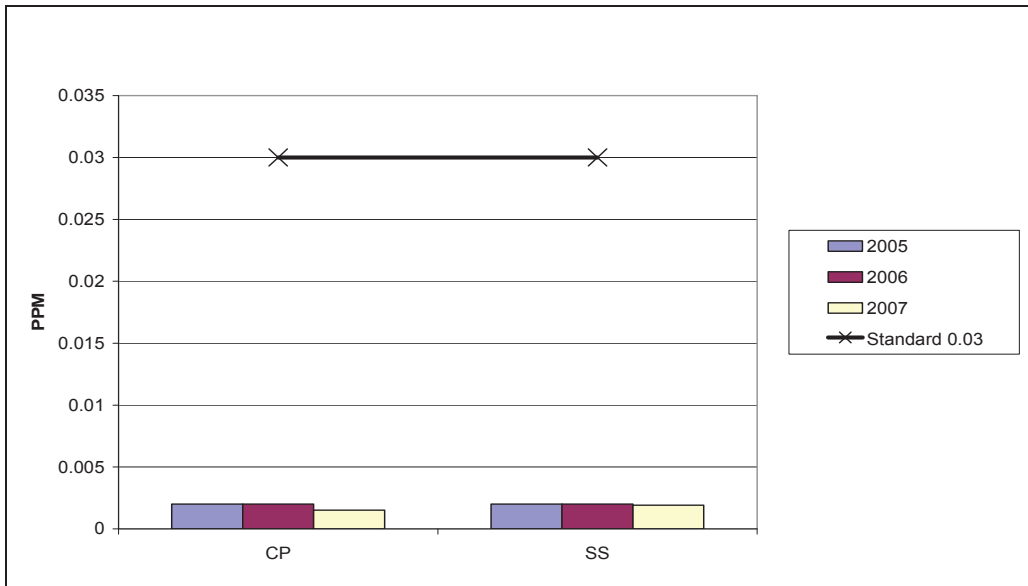


Chart 8 2005-2007 Sulfur Dioxide Annual Average

## Special Projects and Network Changes

Air quality issues such as the SIP, natural events policy, and permits for new sources are diverse and controversial subjects for the citizens of Maricopa County. Since no policies can be made without high-quality monitoring data, the MCAQD Air Monitoring Division strives to provide the most reliable and relevant air monitoring data to the public. The following is a list of projects and changes that have occurred during the year 2007.

### Seasonal Monitors

MCAQD continues to run some of its carbon monoxide (CO) monitors and ozone (O<sub>3</sub>) monitors on a seasonal basis (Table 23). Having part of the network operating seasonally allows the County to upgrade instruments, perform preventive maintenance, extend the life expectancy of the instruments, reduce replacement costs, and better utilize its QA and QC resources on the remaining instruments. During the off-season the number of CO and Ozone monitors operating still exceeds the minimum EPA requirements.

**Table 23 Seasonal Monitors**

<b>Seasonal Carbon Monoxide Monitors ( Operational Sept. 1 – Apr. 1)</b>	<b>Seasonal Ozone Monitors (Operational Apr. 1 – Nov. 1)</b>
Buckeye	Buckeye
Dysart	Cave Creek
Glendale	Dysart
Mesa	Falcon Field
North Phoenix	Glendale
South Phoenix	Humboldt Mountain
South Scottsdale	Rio Verde
Tempe	Tempe
West Chandler	West Chandler

### The Consideration of Additional Sites/Monitors

MCAQD continues to evaluate the PM<sub>10</sub> network for possible additional sites for determining the impact on ambient pollution levels of significant sources or source categories. The significant sources would include industry and agriculture. The allocation of both financial and personnel resources continue to remain significant obstacles to the establishment of new monitoring sites.

### New Sites

MCAQD started a new site with a PM-10 special purpose monitor in April 2007. This site is called Coyote Lakes and is a middle scale PM-10 monitor with a purpose of evaluating point sources (sand & gravel mining operations) in the area. A new site, tentatively planned to be called the Tolleson site, is planned to be opened in the west valley around the junction of Interstate-10 and the Loop-101. This site has been in the planning stage since 2006, but we are still in negotiations with the City of Tolleson about leasing the land; it is hoped that the site will open in mid 2008. Another site is also in the pre-planning stage for the far west valley/Litchfield Park area. This site will provide coverage between the Tolleson site and the Buckeye site.

## **Closed Sites/Monitors**

MCAQD did not close down any monitors or sites in 2007.

## **Other Network Changes/Special Projects/Comments**

MCAQD continues to participate in the Joint Air Toxic Assessment Project (JATAP) in conjunction with the Arizona Department of Environmental Quality (ADEQ) and Phoenix area Urban Tribal Communities. We have been providing space at our existing sites (South Phoenix, West Phoenix, and Greenwood) for Hazardous Air Pollutants (HAP) monitoring.

ADEQ, in conjunction with MCAQD, has developed a year-round air quality forecasting capability for the Phoenix metropolitan area. ADEQ takes the lead on air quality forecasting and issuing of High Pollution Advisories, while MCAQD provides monitoring data and designates No-Burn Days.

MCAQD is continuing its distribution of air monitoring data to the public by posting one-hour continuous data on the Internet (see “Maricopa County Interactive Pollution Map” section below). Additionally, MCAQD participates in the EPA Ozone Mapping AIRNow website (see ADDITIONAL COMMENTS). The corresponding websites are as follows:

Maricopa County Air Quality Dept:

<http://aqwww.maricopa.gov/AirMonitoring/SitePollutionMap.aspx>

AIRNow: <http://www.epa.gov/airnow>

## **Mobile Monitoring Program**

MCAQD received approval in late 2006 from the Maricopa County Board of Supervisors to start a Mobile Monitoring program. This program will enable MCAQD to do more source-specific air monitoring (as opposed to the ambient monitoring that we only perform now); the ability to track down sources of air pollutants; the ability to collect and analyze hazardous air-pollutant (HAP) samples; and the ability to perform stack testing of permitted sources. The program will be useful for collecting and analyzing scientific data for various projects, including assisting our compliance division in the enforcement of air pollution control regulations.

The planned equipment for the program includes a vehicle outfitted with air monitoring and analytical equipment. Monitoring and sampling equipment will consist of various meteorological, criteria pollutant, and HAP monitors, as well as stack testing equipment. Analytical equipment will include a portable Gas-Chromatograph/Mass Spectrometer (GCMS) and geographical positioning systems. We will be able to use geographical information systems to build geo-referenced models of sampled pollutants.

MCAQD is currently working with Maricopa County Human Resources to begin to fill the new personnel positions that will be required for the mobile monitoring program. We are also in the process of the planning the program’s budget and researching equipment choices.

## ADDITIONAL COMMENTS

### Arizona Department of Environmental Quality Network

The ADEQ operates its own monitoring network within the State of Arizona, including some sites within Maricopa County. In addition to these state-run sites, ADEQ also utilizes several MCAQD sites to operate their own monitoring equipment. The ADEQ does a variety of ambient pollution, air toxics, visibility, and meteorological monitoring. One of the main sites in Maricopa County that is operated by ADEQ is the JLG Supersite in central Phoenix. The Supersite is a National Core multi-pollutant monitoring station (NCore) and is part of the national monitoring network (MCAQD's monitors, on the other hand, are part of the State and Local Air Monitoring network (SLAMS)).

For more information about the state's network or the NCore JLG Supersite consult the ADEQ's Annual Network Plan on their website at:

<http://www.azdeq.gov/function/forms/reports.html>.

### EPA Ozone Mapping

The AIRNow website (<http://www.epa.gov/airnow>) provides real-time air pollution (ozone and PM<sub>2.5</sub>) maps for major metropolitan areas around the United States, including the Phoenix Metropolitan Area. MCAQD has participated in the program since 2001.

MCAQD, in cooperation with ADEQ and the Pinal County Air Pollution Control District, has expanded the area that the maps cover. This area now includes sites as far east as Queen Creek, as far south as Casa Grande, and as far west as Palo Verde.

This website can be used as a tool for which the public can plan their daily activities and limit their exposure to air pollution. Eight-hour average peak ozone concentration maps and real-time eight-hour ozone animation maps are provided. Colors on the map indicate different concentrations of ozone pollution. The one-hour average values are given in parts per billion. The eight-hour averages are converted into Air Quality Index (AQI) numbers. The AQI is based on the NAAQS. The index was developed to convert pollution measurements into a common index that the general public can more easily understand.

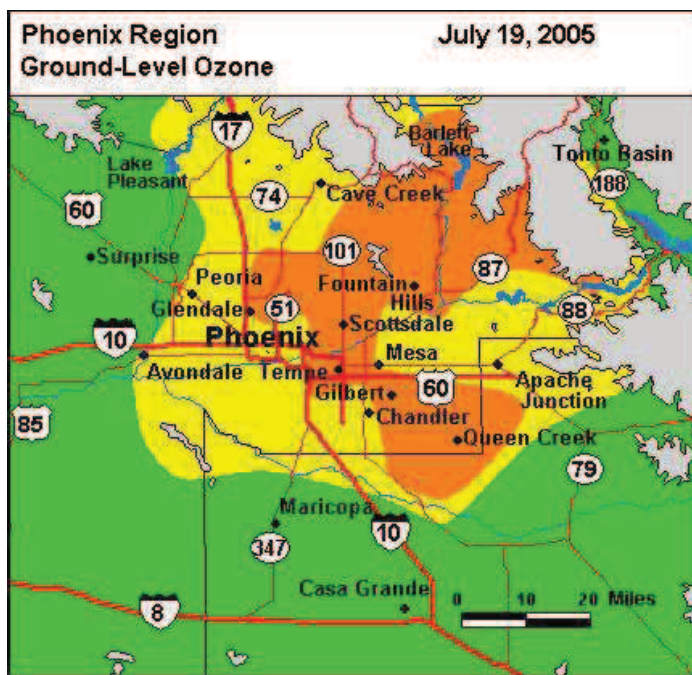


Figure 8 EPA AIRNow Website

Different colors on the map correspond to different categories of air quality and health impacts (Table 24).

**Table 24 Air Quality Index**

<b>Index</b>	<b>Color Designation</b>	<b>Air Quality</b>	<b>Health Impact</b>
0 – 50	Green	Good	No harmful effects expected.
51 – 100	Yellow	Moderate	Unusually sensitive people should consider limiting prolonged outdoor exertion.
101 – 150	Orange	Unhealthy for Sensitive Groups	Active children & adults, people with respiratory disease (i.e., asthma) should limit prolonged outdoor exertion.
151 – 200	Red	Unhealthy	Everyone should observe caution. Avoid prolonged outdoor exertion.
201 – 300	Purple	Very Unhealthy	Avoid all outdoor exertion. Use extreme caution outdoors
301 – 500	Maroon	Hazardous	Everyone should avoid all outdoor exertion.

The animated map is updated every hour from 8am to 8pm seven days a week. Updates to the site will be made during the ozone season (April through October).

### **Maricopa County’s Interactive Pollution Map**

In the spirit of our mission statement of “Protecting our most vital natural resource”, MCAQD brought real-time pollution data to the Internet in late 2006. All of the MCAQD continuous data is available to the public through an interactive map (Figure 9). The air pollutants that are available include CO, Ozone, NO<sub>2</sub>, SO<sub>2</sub>, and Particulates. Wind Speed and Direction information is also available. Seasonal monitors are noted on the website and the data display will inform the user which monitors are currently active. Data can be accessed at the web address:

<http://aqwww.maricopa.gov/AirMonitoring/SitePollutionMap.aspx>.

Data is displayed using actual readings, as well as AQI numbers. Relevant rolling averages are also displayed. In addition, a trend chart is provided so that the previous 24-hours can be detailed. On a separate page, a 30-day pollution history is displayed for each site.

One of the major problems in providing “real-time” pollution data to a public medium is providing quality data. The data available on the Internet goes through an automated quality assurance check program before it is released; however, some invalid data can slip through. Normal quality assurance checks take between one and three months. Consequently, information provided at this site should be used for informational purposes only and should not be relied on for comparison with NAAQS.

Site Name: West 43rd Ave  
 Site Location: 43rd Ave. and Broadway Rd.  
 AQS Code: 04-013-4009



Warning: These data have been obtained from automated instruments and have not been subjected to a quality assurance review to determine their accuracy. They are presented for public awareness and should not be considered final. Conditions such as power outages and equipment malfunctions can produce invalid data. **Please note that not every pollutant is measured at every site.**

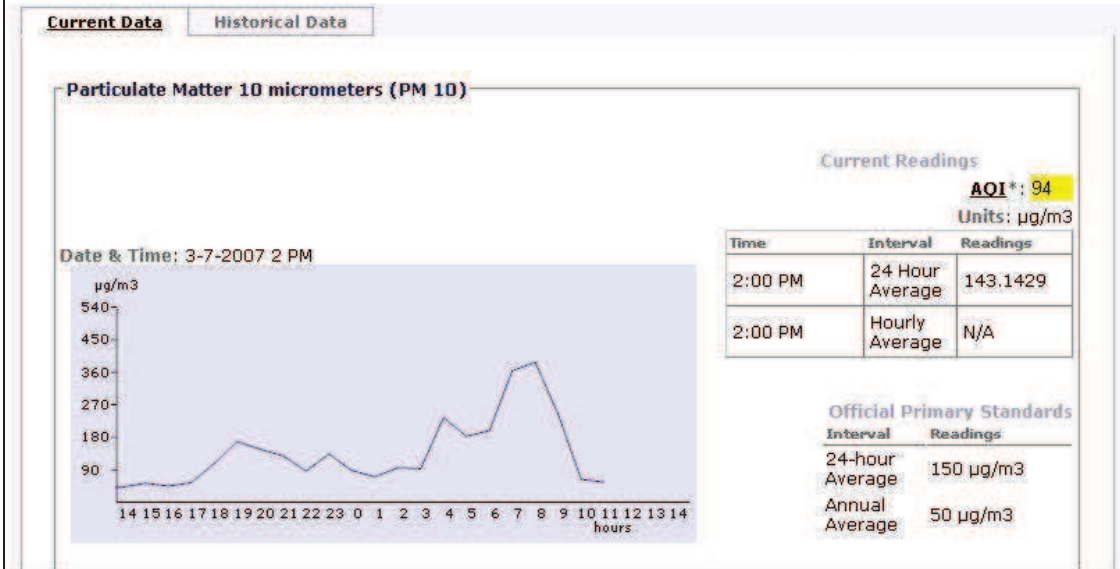



Figure 9 Interactive Website Data Trends Page

## REFERENCES

1. Code of Federal Regulations, Chapter 40, Part 50 and 58, 1997
2. EPA's AirData (AQS) information: <http://www.epa.gov/air/data/index.html>
3. EPA's NAAQS Info: <http://www.epa.gov/air/criteria.html>
4. SIP Information: <http://www.adeq.state.az.us/environ/air/plan/index.html>
5. EPA's Air Program Information: <http://www.epa.gov/rgytgrnj/programs/artd/air/quality/quality.htm>
6. MCAQD Air Monitoring Map: <http://aqwww.maricopa.gov/AirMonitoring/SitePollutionMap.aspx>.
7. AIRNow: <http://airnow.gov/>
8. Criteria Pollutant Information: <http://www.epa.gov/air/urbanair/6poll.html>
9. MCAQD Prior Network Reviews: <http://www.maricopa.gov/aq/divisions/monitoring/network.aspx>.

## **APPENDIX I - Monitoring Site Details (Photos and Specific Information)**

## Blue Point (BP) (04-013-9702)

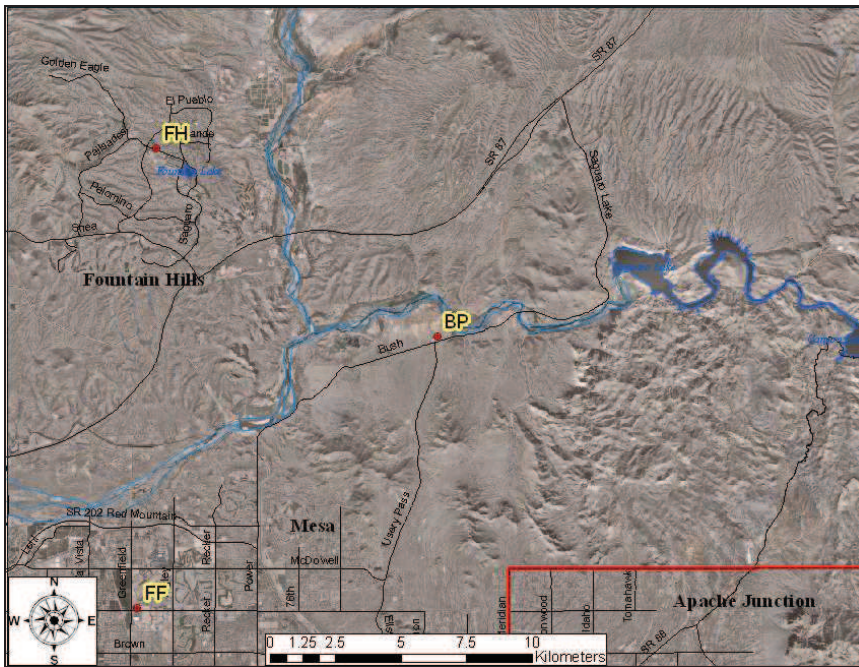

**Location:** Bush Highway and  
Usery Pass Rd., Maricopa  
County  
**Spatial Scale:** Urban  
**Monitoring Objective:** Maximum  
Ozone Concentration



**Site Description:** The Blue Point site became operational in July 1995 and is located in a Maricopa County Sheriff's Sub-Station in Tonto National Forest. This site represents the maximum ozone concentration, and urban-scale downwind transport conditions. This site is located approximately 40 miles east of the Phoenix metropolitan area. Ozone is the only criteria pollutant monitored at this SLAMS station. Wind speed and direction are also monitored at the site.

		2005	2006	2007
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.089*	.064	.066
	O <sub>3</sub> Number of Daily Exceedances >0.085 ppm	2	0	0
	O <sub>3</sub> Three year average of 4 <sup>th</sup> High	0.081	.078	0.072

\*Indicates an exceedance of the standard.

## Buckeye (BE) (04-013-4011)



**Location:** US 85 & MC 85,  
Buckeye  
**Spatial Scale:** Neighborhood and  
Urban (NO<sub>2</sub>)  
**Monitoring Objective:** Population  
Exposure and Source Oriented  
(NO<sub>2</sub>)



**Site Description:** The Buckeye site was established on August 1, 2004. This site is a SLAMS location for carbon monoxide, ozone, PM<sub>10</sub>, and NO<sub>2</sub> criteria pollutants. The site is located in the Maricopa County Department of Transportation Southwest Facility. The immediate area is agriculture and encroaching residential development. The PM<sub>10</sub> monitor was changed from 1-in-6 day to hourly as of October 1, 2004.


		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	0.9	0.7	1.0
	Number exceedances 8-hr CO	0	0	0
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.067	.072	0.066
	O <sub>3</sub> Number of Daily Exceedances >0.085 PPM	0	0	0
	O <sub>3</sub> Three year avg. of 4 <sup>th</sup> High	#	#	0.065
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	169*	272*	195*‡
	Number exceedances 24-hr PM <sub>10</sub>	2	3	2‡
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	53*	53.2	52.5
Nitrogen Dioxide	Annual NO <sub>2</sub> Avg. (PPM)	.0119	.0111	.0102

\*Indicates an exceedance of the standard.


# Indicates <75% data recovery.

‡ Indicates Exceptional Events at this site. Listed value is the highest official current AQS reading.

## Cave Creek (CC) (04-013-4008)

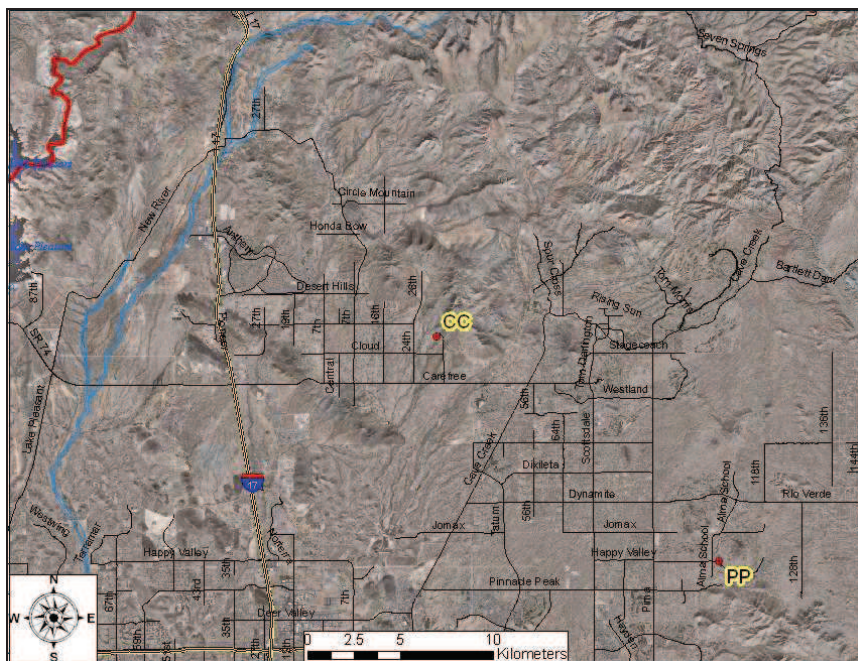

**Location:** 32<sup>nd</sup> St. & Carefree Highway, Cave Creek  
**Spatial Scale:** Urban  
**Monitoring Objective:** Maximum Ozone Concentration

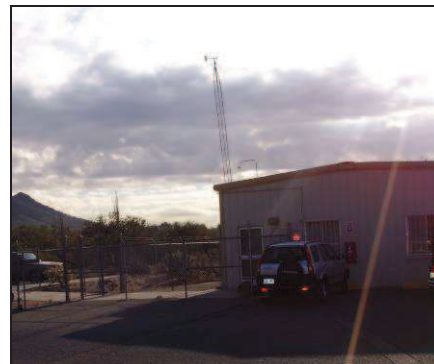

**Site Description:** The Cave Creek site became operational in August 2001 and is located in the Maricopa County Cave Creek Recreation Area (Park Office). This site was chosen through discussions on modifying the ozone network for the new 8-hr ozone standard. Ozone is the only criteria pollutant monitored at this SLAMS station. Wind speed and direction are also monitored at the site.

		2005	2006	2007
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.084	.088*	.083
	O <sub>3</sub> Number of Daily Exceedances >0.085 ppm	0	1	0
	O <sub>3</sub> Three year average of 4 <sup>th</sup> High	0.080	0.079	0.079

\*Indicates an exceedance of the standard.

## Coyote Lakes (CL) (04-013-4014)



**Location:** Beardsley Rd & 115<sup>th</sup> Ave, Surprise  
**Spatial Scale:** Middle  
**Monitoring Objective:** Source Oriented



**Site Description:** The Coyote Lakes site became operational in April 2007. PM<sub>10</sub> is the only pollutant measured at this Special Purpose Monitoring (SPM) site. The monitoring objective of this site is to determine the impact of local sources in the area; the site is located within the Agua Fria river channel which has several sand & gravel mining operations, among other sources such as unpaved roads. Wind speed and direction, temperature, and atmospheric pressure are also monitored at this site; however, the wind data does not meet federal regulations and is therefore not official and is not entered into AQS. Due to neighborhood restrictions, the wind tower cannot be raised to the required height; the wind data from this site is therefore used for reference purposes only.


		2005	2006	2007
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	N/A	N/A	313*‡
	Number exceedances 24-hr PM <sub>10</sub>	N/A	N/A	2‡
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	N/A	N/A	47.8#

\*Indicates an exceedance of the standard.

‡ Indicates Exceptional Events at this site. Listed value is the highest official current AQS reading.

# Indicates <75% data recovery.

## Central Phoenix (CP) (04-013-3002)

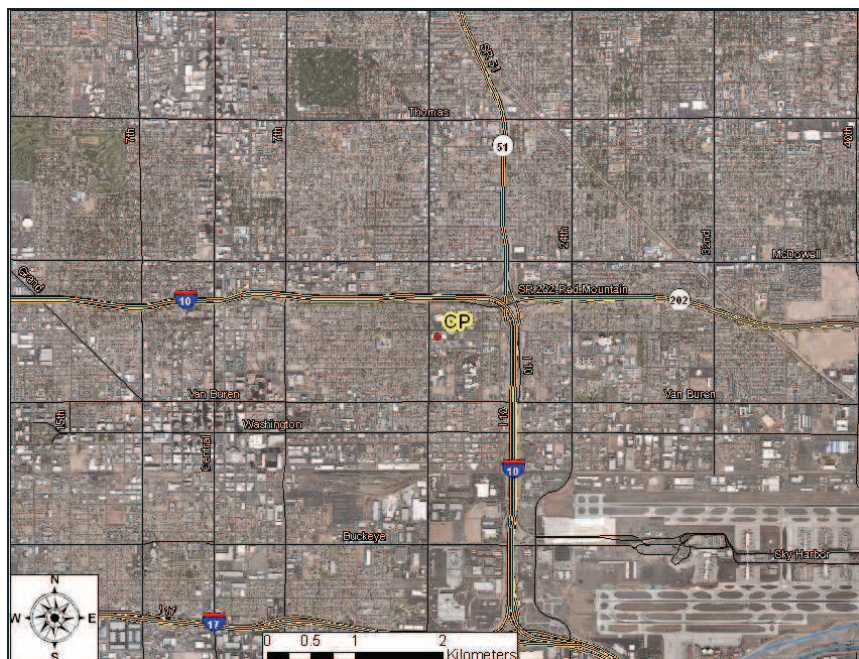

**Location:** 19<sup>th</sup> St. and Roosevelt  
**Spatial Scale:** Neighborhood  
**Monitoring Objective:** High  
 Population Exposure and  
 Highest Concentration (NO<sub>2</sub>  
 and SO<sub>2</sub>)



**Site Description:** The Central Phoenix site has been in existence for over four decades and has provided a long-term historical database with a high rate of data recovery. The site is representative of high population exposure (greater than 5000 people per square mile) in the central Phoenix area. This site is a SLAMS location for carbon monoxide, ozone, PM<sub>10</sub>, SO<sub>2</sub> and NO<sub>2</sub> criteria pollutants.

		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	4.1	3.8	4.1
	Number exceedances 8-hr CO	0	0	0
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	.081	.089*	.073
	O <sub>3</sub> Number of Daily Exceedances >0.085	0	1	0
	O <sub>3</sub> Three year avg. of 4 <sup>th</sup> High	.077	.076	.076
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. Continuous (µg/m <sup>3</sup> )	116	134	267*‡
	Number exceedances Continuous 24-hr PM <sub>10</sub>	0	0	1‡
	Annual PM <sub>10</sub> Avg. Continuous (µg/m <sup>3</sup> )	37	42.0	42.4
Nitrogen Dioxide	Annual NO <sub>2</sub> Avg. (PPM)	0.0262	.0251	.0237
Sulfur Dioxide	Max. 24-hr SO <sub>2</sub> Avg. (PPM)	.008	.007	.007
	Number of Exceedances SO <sub>2</sub>	0	0	0
	Annual SO <sub>2</sub> Avg. (PPM)	.0021	.0021	.0015

\*Indicates an exceedance of the standard.

‡ Indicates Exceptional Events at this site. Listed value is the highest official current AQS reading.

## Durango Complex (DC) (04-013-9812)



**Location:** 27<sup>th</sup> Ave and Durango St.  
**Spatial Scale:** Middle  
**Monitoring Objective:** Highest Concentration



**Site Description:** This site is located in the Maricopa County Flood Control District storage yard which is one mile northwest from the former Salt River site. Sampling began on January 6, 1999 with the intent to replace the Salt River site. However, in 2000 the USEPA determined that the site is not equivalent to the Salt River site. Continuous particulate monitors (SLAMS PM<sub>10</sub> and PM<sub>2.5</sub>) are located at this site. Note that the PM<sub>2.5</sub> monitor located at this site is a continuous FDMS-TEOM monitor, which is not a federal reference method monitor. PM<sub>2.5</sub> data from this site is not used to determine compliance with the NAAQS. There are also meteorological monitors (wind speed/direction and atmospheric pressure) located at the site.

		2005	2006	2007
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. Continuous (µg/m <sup>3</sup> )	206*	240*‡	155*‡
	Number exceedances Continuous 24-hr PM <sub>10</sub>	13	9	1‡
	Annual PM <sub>10</sub> Avg. Continuous (µg/m <sup>3</sup> )	66*	69.2‡	59.5
PM <sub>2.5</sub>	Max. 24-hr PM <sub>2.5</sub> Avg. (µg/m <sup>3</sup> )	#	68.17	59.7
	Annual PM <sub>2.5</sub> Avg. (µg/m <sup>3</sup> )	#	15.1	14.2

\*Indicates an exceedance of the standard.

#Indicates <75% data recovery.

‡ Indicates Exceptional Events at this site. Listed value is the highest official current AQS reading.

## Dysart (DY) (04-013-4010)



**Location:** Bell Rd. & Dysart Rd.,  
**Surprise**  
**Spatial Scale:** Neighborhood  
**Monitoring Objective:** Population  
**Exposure**



**Site Description:** The Dysart site was established in July 2003. It is located at the Maricopa County Facility Maintenance Yard at the corner of Bell Rd. and Dysart Rd. The site is in a growing population area in the north-west valley. The land use around the site consists of subdivisions of single family homes, commercial, and industrial. The site is approx. one mile west of the Agua Fria riverbed. Seasonal carbon monoxide, seasonal ozone, and PM<sub>10</sub> (all SLAMS) are the criteria pollutants monitored at this station.

		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	1.3	0.9	2.2
	Number exceedances 8-hr CO	0	0	0
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.073	.079	.069
	Number of Daily Exceedances >0.085 PPM	0	0	0
	Three year avg. of 4 <sup>th</sup> High	#	#	.067
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	76	67	111
	Number exceedances 24-hr PM <sub>10</sub>	0	0	0
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	29	32.3	35.9

#Indicates <75% data recovery.

# Falcon Field (FF) (04-013-1010)



**Location: Greenfield and McKellips**  
**Spatial Scale: Neighborhood**  
**Monitoring Objective: Population Exposure**



**Site Description:** Ozone is the seasonal SLAMS criteria pollutant monitored at this station. Monitoring began in June of 1989. The site is located near an airfield in a fire station within a growing residential area.

		2005	2006	2007
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.081	.085*	.080
	Number of Daily Exceedances >0.085 PPM	0	1	0
	Three year avg. of 4 <sup>th</sup> High	0.075	0.075	.076

\*Indicates an exceedance of the standard.

## Fountain Hills (FH) (04-013-4010)



**Location:** Fountain Hills Blvd. and Palisades Blvd.

**Spatial Scale:** Neighborhood

**Monitoring Objective:** Maximum Ozone Concentrations



**Site Description:** The site is located at a Fountain Hills fire station. This site became operational in April of 1996. The site monitors ozone (SLAMS) and wind speed and direction. The site is located approximately 15 miles downwind from the Phoenix metropolitan area. This site represents the high downwind concentrations on the fringes of the central basin district along the predominant summer/fall daytime wind direction.

		2005	2006	2007
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.096*	0.089*	.083
	Number of Daily Exceedances >0.085 PPM	6	3	0
	Three year avg. of 4 <sup>th</sup> High	0.082	0.082	.082

\* Indicates an exceedance of the standard.

# Glendale (GL) (04-013-2001)



**Location:** 59<sup>th</sup> Ave. and Olive Ave.  
**Spatial Scale:** Neighborhood  
**Monitoring Objective:** Population Exposure



**Site Description:** The Glendale site was established over three decades ago and is located on the grounds of Glendale Community College in a populous residential area. Homes, various strip malls, food establishments, and parks surround the site. Seasonal carbon monoxide, Seasonal Ozone, and PM<sub>10</sub> (all SLAMS) are the criteria pollutants monitored at this station.

		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	2.4	1.9	1.8
	Number exceedances 8-hr CO	0	0	0
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.078	0.084	0.075
	Number of Daily Exceedances >0.085 PPM	0	0	0
	Three year avg. of 4 <sup>th</sup> High	0.079	0.076	0.075
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	84	60	92
	Number exceedances 24-hr PM <sub>10</sub>	0	0	0
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	29	36.3#	34.1

#Indicates <75% data recovery.

## Greenwood (GR) (04-013-3010)



**Location:** 27th Ave. and I-10,  
Phoenix  
**Spatial Scale:** Middle  
**Monitoring Objective:** Population  
Exposure



**Site Description:** Monitoring began at this site in December 1993. The station is bordered on the north by Interstate 10, on the west and south by neighborhood homes, and to the east by Greenwood Cemetery. Interstate 17 is approximately one mile to the east of the site. Carbon monoxide, NO<sub>2</sub>, and PM<sub>10</sub> are the criteria pollutants monitored at this SLAMS facility. This site was converted to continuous PM<sub>10</sub> monitoring in the beginning of 2006.

		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	4.2	3.6	4.0
	Number exceedances 8-hr CO	0	0	0
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	173*	166*	124
	Number exceedances 24-hr PM <sub>10</sub>	1	1	0
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	52*	51.7	50.0
Nitrogen Dioxide	Annual NO <sub>2</sub> Avg. (PPM)	0.0315	0.0306	0.0290

\* Indicates an exceedance of the standard.

## Higley (HI) (04-013-4006)



**Location:** Higley Rd. and Williams Field Rd., Gilbert  
**Spatial Scale:** Neighborhood  
**Monitoring Objective:** Population Exposure




**Site Description:** Originally, in 1994, ADEQ set up this site to monitor for background particulate concentrations near the urban limits of Maricopa County. Since then, urban expansion has enveloped the site, so it no longer serves its original intended purpose. MCAQD installed a (1-in-6 day) PM<sub>10</sub> (SLAMS) in the second quarter of 2000. The data from this site was compared to the Chandler site and was found to be comparable. Since the City of Chandler requested that MCAQD remove the Chandler site on 12/31/05, this site has taken over the role of that site. As of October 2004 the 1-in-6 day PM<sub>10</sub> monitor was replaced with an hourly continuous PM<sub>10</sub> monitor in accordance with 40 CFR 50, Appendix K. This continuous monitor samples on the neighborhood scale with a monitoring objective of high population exposure.

		2005	2006	2007
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	142	177*‡	230*‡
	Number exceedances 24-hr PM <sub>10</sub>	0	2‡	5‡
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	51.4*	60.6	53.0

\* Indicates an exceedance of the standard.

‡ Indicates Exceptional Events at this site. Listed value is the highest official current AQS reading.

# Humboldt Mountain (HM) (04-013-9508)

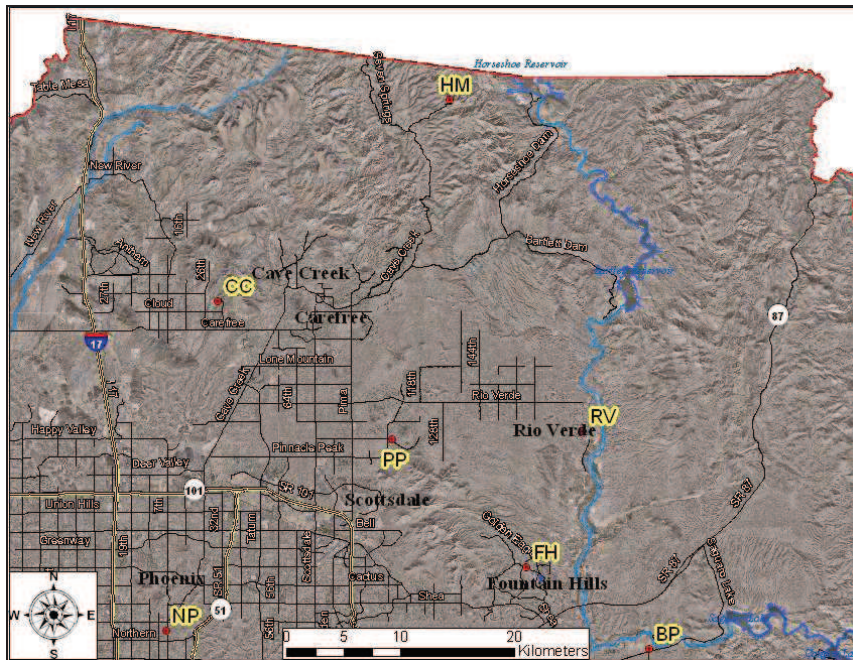

**Location:** Humboldt Mountain Summit  
**Spatial Scale:** Regional  
**Monitoring Objective:** Maximum Ozone Concentrations




**Site Description:** This site became operational in August 1995. The Humboldt Mountain site is located on Federal Aviation Agency property, in a National Forest Service building in the Tonto National Forest. This site is located approximately 40 miles north-northeast of the Phoenix metropolitan area at an elevation of 5190 feet. Ozone is the only criteria pollutant that is monitored at this seasonal SLAMS site.

		2005	2006	2007
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.088*	.084	.080
	Number of Daily Exceedances >0.085 PPM	5	0	0
	Three year avg. of 4 <sup>th</sup> High	0.084	.081	.081

\* Indicates an exceedance of the standard.

# Mesa (ME) (04-013-1003)

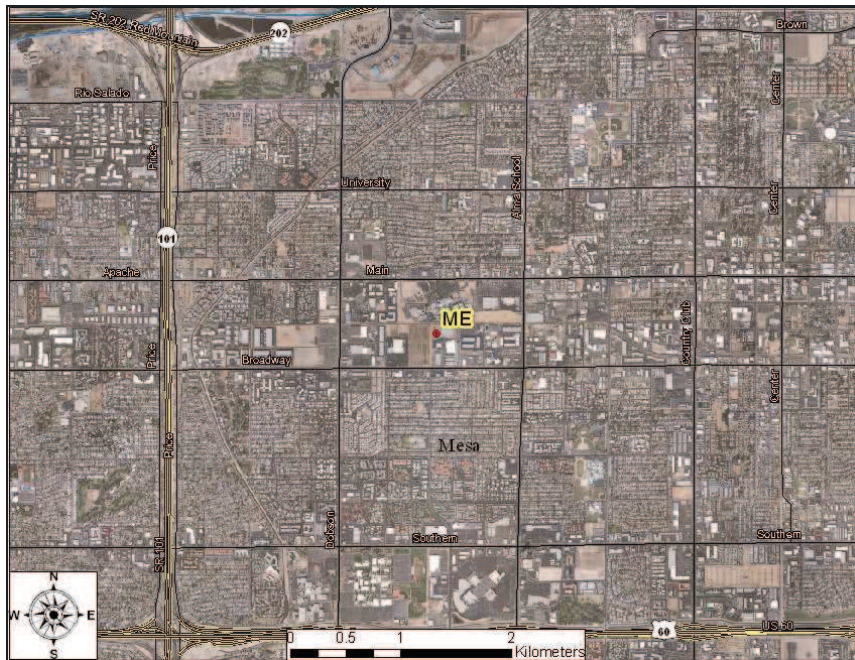

**Location:** Broadway Rd. and Brooks Ave.  
**Spatial Scale:** Neighborhood  
**Monitoring Objective:** Population Exposure




**Site Description:** This site is located at Brooks Reservoir at the western edge of the city near the Tempe border. It is centered in an area that contains residential, industrial, and a small amount of agricultural activity. An open field borders the site on the west with commercial development to the north, and light industry east and south of the site. Carbon monoxide, PM<sub>2.5</sub>, and PM<sub>10</sub> are the criteria pollutants monitored at this SLAMS site. MCAQD started operation of the PM<sub>2.5</sub> Federal Reference Method monitor in May 2005.

		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	2.4	2.8	2.0
	Number exceedances 8-hr CO	0	0	0
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	86	75	110
	Number exceedances 24-hr PM <sub>10</sub>	0	0	0
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	30	30.5	32.3
PM <sub>2.5</sub>	Max. 24-hr PM <sub>2.5</sub> Avg. (µg/m <sup>3</sup> )	17.8	29.1	24.3
	Number of Daily Exceedances	0	0	0
	Annual PM <sub>2.5</sub> Avg. (µg/m <sup>3</sup> )	8.51#	9.66	9.72

# Indicates <75% data completeness.

## North Phoenix (NP) (04-013-1004)

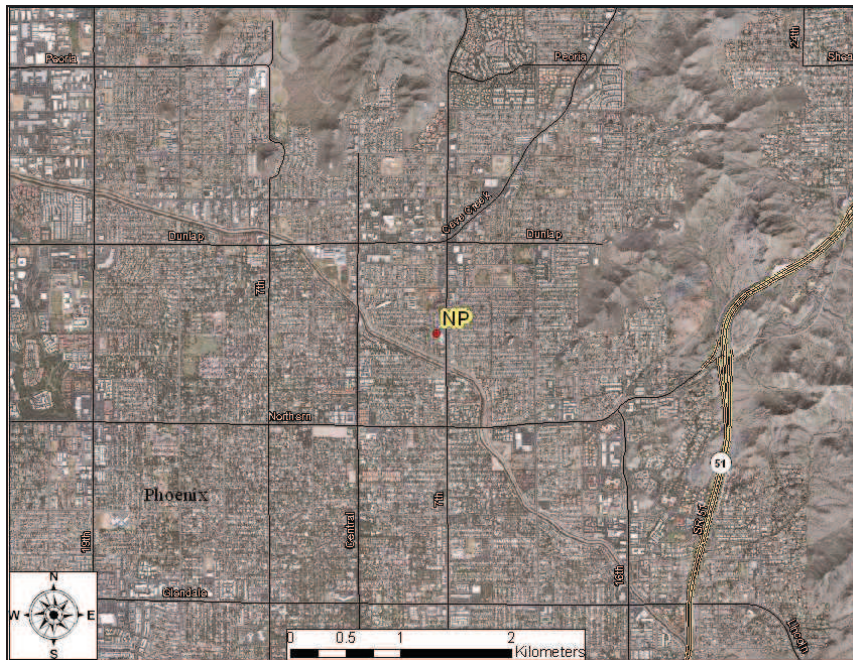

**Location:** 7<sup>th</sup> St. and Butler Ave.  
**Spatial Scale:** Neighborhood  
**Monitoring Objective:** Population Exposure




**Site Description:** This site is located in the Sunnyslope area of North Phoenix. Sunnyslope is an old established neighborhood, primarily residential. High-density population surrounds the site. CO, ozone, and PM<sub>10</sub> (all SLAMS) are monitored at this site, along with delta temperature (temperature inversion).

		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	2.3	2.0	1.7
	Number exceedances 8-hr CO	0	0	0
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.089*	0.094*	0.081
	Number of Daily Exceedances >0.085	3	4	0
	Three year Avg. of 4 <sup>th</sup> High	0.082	0.083	0.082
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	81	79	78
	Number exceedances 24-hr PM <sub>10</sub>	0	0	0
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	30	34.4	33.5

\* Indicates an exceedance of the standard.

# Pinnacle Peak (PP) (04-013-2005)

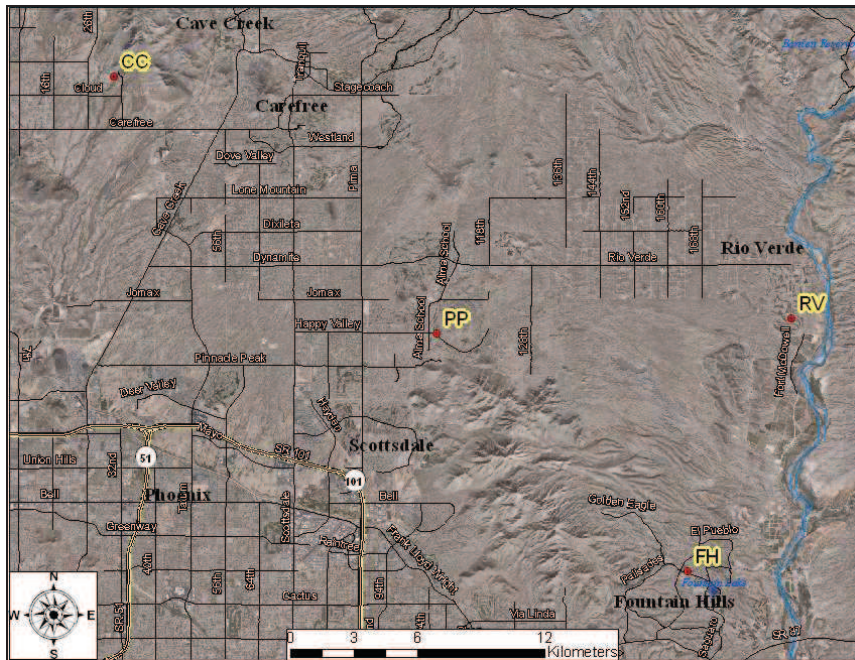

**Location:** Pima Rd & Pinnacle Peak  
**Spatial Scale:** Urban  
**Monitoring Objective:** Maximum Ozone Concentrations



**Site Description:** This SLAMS site for ozone is located on the roof of a golf course country club and is surrounded by residential homes. It is located in a geographic area of low-density population (less than 2500 people per square mile). In previous years, ozone exceedances have been recorded due to transport of ozone and precursors from more urbanized areas of metropolitan Phoenix.

		2005	2006	2007
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.085*	0.082	0.076
	Number of Daily Exceedances >0.085	1	0	0
	Three year Avg. of 4 <sup>th</sup> High	0.078	0.075	0.078

\* Indicates an exceedance of the standard

## Rio Verde (RV) (04-013-9706)



**Location:** Forest Rd. and Del Ray Ave.  
**Spatial Scale:** Urban  
**Monitoring Objective:** Maximum Ozone Concentrations




**Site description:** This seasonal ozone site became operational in spring of 1997. The monitor is located at the fire station / County Sheriff's office sub-station located in a residential area surrounded by the desert of Tonto National Forest. The site is eight miles north of the Fountain Hills SLAMS station, on the edge of a Class I Wilderness Area.

		2005	2006	2007
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.093*	0.086*	0.082
	Number of Daily Exceedances >0.085	6	1	0
	Three year Avg. of 4 <sup>th</sup> High	0.079	0.081	0.083

\* Indicates an exceedance of the standard

## South Phoenix (SP) (04-013-4003)

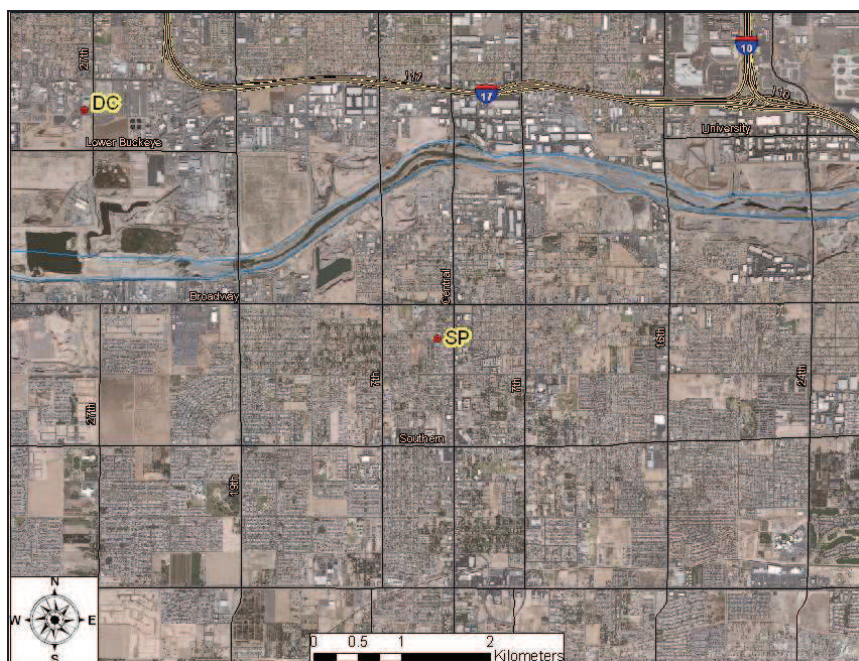

**Location:** Central Ave. and Broadway Rd.  
**Spatial Scale:** Neighborhood  
**Monitoring Objective:** Population Exposure




**Site Description:** The site was opened at its current location in October 1999. The site is at the edge of a high population area, but also borders on a mixture of residential and commercial (retail stores, food establishments, and office parks) land use. The station has two high population areas (>5000 people per square miles) north and west of the site. Carbon monoxide, ozone, and PM<sub>10</sub> (all SLAMS) are the criteria pollutants monitored at this station. MCAQD started operation of a PM<sub>2.5</sub> Federal Reference Monitor in May 2005.

		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	3.8	3.2	3.1
	Number exceedances 8-hr CO	0	0	0
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.081	0.075	0.079
	Number of Daily Exceedances >0.085	0	0	0
	Three year Avg. of 4 <sup>th</sup> High	0.075	0.072	0.072
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	147	132	171*‡
	Number exceedances 24-hr PM <sub>10</sub>	0	0	2‡
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	55*	55.0	55.6
PM <sub>2.5</sub>	Max. 24-hr PM <sub>2.5</sub> Avg. (µg/m <sup>3</sup> )	56.7	76.2	32.2
	Number of Daily Exceedances	0	2	0
	Annual PM <sub>2.5</sub> Avg. (µg/m <sup>3</sup> )	11.46	12.69	12.27

\* Indicates an exceedance of the standard.

‡ Indicates Exceptional Events at this site. Listed value is the highest official current AQS reading.

## South Scottsdale (SS) (04-013-3003)

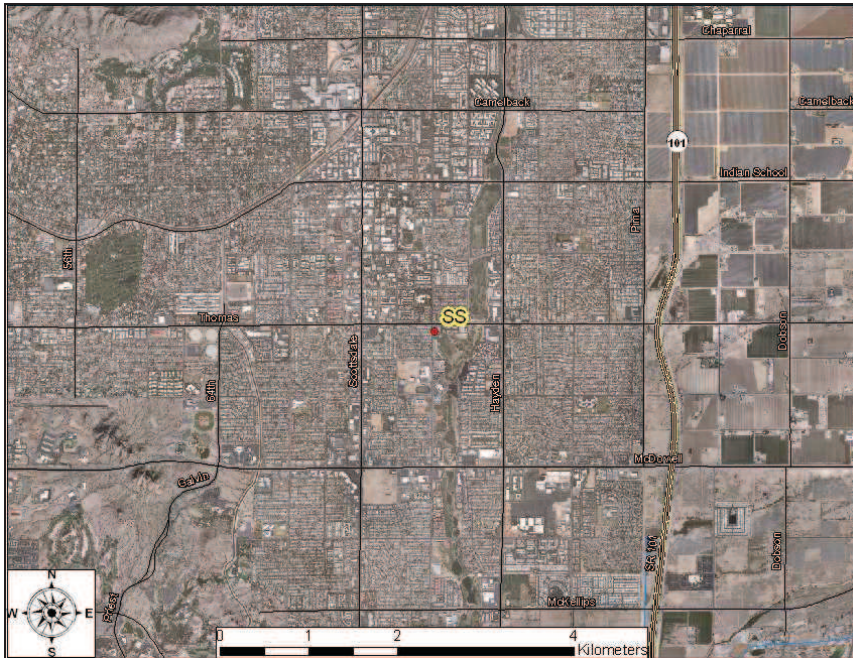

**Location:** Thomas Rd. and Miller Rd.  
**Spatial Scale:** Neighborhood, Urban (NO<sub>2</sub>)  
**Monitoring Objective:** Population Exposure



**Site Description:** The South Scottsdale site is located at a City of Scottsdale Fire Station. The area surrounding the site is residential with a density of 2500 to 5000 persons per square mile. This site is located 12 miles east of metropolitan Central Phoenix. Carbon monoxide, ozone, NO<sub>2</sub>, SO<sub>2</sub>, and PM<sub>10</sub> (all SLAMS) are the criteria pollutants monitored at this station.

		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	2.4	2.1	1.6
	Number exceedances 8-hr CO	0	0	0
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.089*	0.086*	.082
	Number of Daily Exceedances >0.085	1	1	0
	Three year Avg. of 4 <sup>th</sup> High	0.076	0.076	0.078
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	121	134	73
	Number exceedances 24-hr PM <sub>10</sub>	0	0	0
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	34	32.9	30.6
Nitrogen Dioxide	Annual NO <sub>2</sub> Avg. (PPM)	0.0196	0.0192	0.0163
Sulfur Dioxide	Max. 24-hr SO <sub>2</sub> Avg. (PPM)	0.006	0.007	0.005
	Number of Exceedances SO <sub>2</sub>	0	0	0
	Annual SO <sub>2</sub> Avg. (PPM)	0.0017	0.0021	0.0019

\* Indicates an exceedance of the standard.

## Tempe (TE) (04-013-4005)



**Location:** Apache Blvd. & College Ave.

**Spatial Scale:** Neighborhood

**Monitoring Objective:** Population Exposure



**Site Description:** The site was established in 2000. The site was established to fill in a spatial gap between the metropolitan Phoenix area and the city of Mesa. Ozone and carbon monoxide (both SLAMS) are monitored at the site.

		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	2.6	2.5	2.0
	Number exceedances 8-hr CO	0	0	0
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.086*	0.087*	0.084
	Number of Daily Exceedances >0.085	1	1	0
	Three year Avg. of 4 <sup>th</sup> High	0.076	0.075	0.077

\* Indicates an exceedance of standard.

## West Chandler (WC) (04-013-4004)



**Location:** Frye Rd. and Ellis St.  
**Spatial Scale:** Neighborhood,  
 Middle (PM-10)  
**Monitoring Objective:** Population  
 Exposure



**Site Description:** This site was first established in January 1995. The site was moved one half mile to the southeast in May 2000. A wide range of land uses surround the site including residential, agriculture, and heavy industry (semiconductor manufacturing plants and liquid air storage). Carbon monoxide, ozone, and PM<sub>10</sub> are the criteria pollutants monitored at this SLAMS site.

		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	2.4	2.2	2.0
	Number exceedances 8-hr CO	0	0	0
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.082	0.089*	0.084
	Number of Daily Exceedances >0.085	0	2	0
	Three year Avg. of 4 <sup>th</sup> High	0.076	0.075	0.076
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	94	77	104
	Number exceedances 24-hr PM <sub>10</sub>	0	0	0
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	34	33.3	36.4

\* Indicates an exceedance of the standard.

## West 43<sup>rd</sup> Avenue (WF) (04-013-4009)



**Location:** 43<sup>rd</sup> Ave. & Broadway Rd.

**Spatial Scale:** Middle

**Monitoring Objective:** Highest Concentrations



**Site Description:** Monitoring began at the site in the 2<sup>nd</sup> quarter of 2002. This site is located at a Maricopa County Department of Transportation storage lot. The site is surrounded by a combination of heavy industry and residential homes. The site has one continuous TEOM PM<sub>10</sub> monitor and a temperature inversion monitor, as well as other meteorological instruments. The main purpose of the site is to measure maximum concentration PM<sub>10</sub> and to determine the impact on ambient pollution levels of significant sources or source categories. The sources around the site include sand and gravel operations, auto and metal recycling, landfills, paved and unpaved haul roads, and cement casting.

		2005	2006	2007
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	233*	260*‡	227*‡
	Number exceedances 24-hr PM <sub>10</sub>	13	18	6‡
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	74*	79.9	71.8

\* Indicates an exceedance of the standard.

‡ Indicates Exceptional Events at this site. Listed value is the highest official current AQS reading.

## West Indian School Road (WI) (04-013-0016)




**Location:** Frye Rd. and Ellis St.  
**Spatial Scale:** Neighborhood,  
 Middle (PM-10)  
**Monitoring Objective:** Population  
 Exposure



**Site Description:** This site is located at the City of Phoenix Firefighter Training Center. This site was opened in December 1980 and is used to monitor micro-scale maximum concentrations and is based on high vehicular traffic. The Average Weekday Traffic (AWT) volume past this location on Indian School Road is estimated to be approximately 55,000 vehicles/day. The site is also in close proximity to Grand Ave. and 35th Ave., which have AWT volumes of about 35,000 vehicles/day. Carbon monoxide is monitored at this SLAMS site. There is current discussion regarding closing this site. The data collected at this site is very similar to that collected at the nearby West Phoenix site, which is neighborhood scale and just under 2 kilometers away. This implies that this micro-scale site is no longer necessary as this area is representative of the other neighborhood scale site.

		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	5.3	5.3	5.0
	Number exceedances 8-hr CO	0	0	0

## West Phoenix (WP) (04-013-0019)

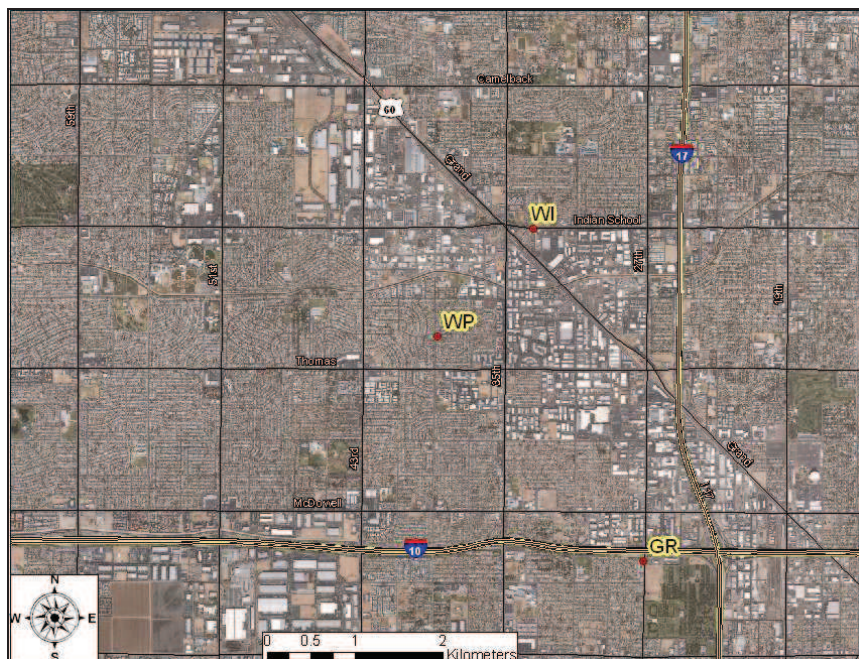

**Location:** 39<sup>th</sup> Ave. and Earll Dr.  
**Spatial Scale:** Neighborhood  
**Monitoring Objective:** Population Exposure,  
 Highest Concentration (PM<sub>2.5</sub>)



**Site Description:** This site became operational in 1984. It is located about one-mile southwest of the West Indian School Road micro-scale CO monitor. The spatial scale for the West Phoenix site is neighborhood. It is located in an area of stable, high-density residential population. Carbon monoxide, PM<sub>10</sub>, ozone, and NO<sub>2</sub> (All SLAMS) are the criteria pollutants monitored at this site. MCAQD also operates collocated PM<sub>2.5</sub> FRM monitors and a continuous PM<sub>2.5</sub> monitor (SLAMS) at this site.

		2005	2006	2007
Carbon Monoxide	Max. 8-hr CO Avg. (PPM)	5.8	5.0	4.6
	Number exceedances 8-hr CO	0	0	0
Ozone	Max. 8-hr O <sub>3</sub> Avg. (PPM)	0.072	0.096*	0.079
	Number of Daily Exceedances >0.085	0	3	0
	Three year Avg. of 4 <sup>th</sup> High	0.072	0.074	0.074
PM <sub>10</sub>	Max. 24-hr PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	155*	147	124
	Number exceedances 24-hr PM <sub>10</sub>	1	0	0
	Annual PM <sub>10</sub> Avg. (µg/m <sup>3</sup> )	45	49.8	47.0
PM <sub>2.5</sub>	Max. 24-hr PM <sub>2.5</sub> Avg. (µg/m <sup>3</sup> )	39.2	76.7*	33.0
	Number of Daily Exceedances	0	2	0
	Annual PM <sub>2.5</sub> Avg. (µg/m <sup>3</sup> )	11.08	13.52	10.89
Nitrogen Dioxide	Annual NO <sub>2</sub> Avg. (PPM)	0.0235	0.0238	0.0209

\* Indicates an exceedance of the standard.

## **APPENDIX II - EPA REQUIRED DATA**

**Details compliance with requirements of 40CFR58 §58.10 and Appendices A, C, D, and E**

## Required General Information on Monitoring Network

Pollutant	MSA	MSA Population*	Design Value	#Monitors Required	#Monitors Operating**
Carbon Monoxide	6200 Phoenix-Mesa	3,251,876	1-Hour: 7.7 ppm 8-Hour: 4.6 ppm	0	13
Ozone	6200 Phoenix-Mesa	3,251,876	0.08 ppm	2	17
Nitrogen Dioxide	6200 Phoenix-Mesa	3,251,876	0.029 ppm	0	5
PM <sub>2.5</sub>	6200 Phoenix-Mesa	3,251,876	24-hour: 32.2 µg/m <sup>3</sup> Annual: 12.4 µg/m <sup>3</sup>	3	3
PM <sub>2.5</sub> Continuous Monitors	6200 Phoenix-Mesa	3,251,876	N/A	2	2
PM <sub>10</sub>	6200 Phoenix-Mesa	3,251,876	267 µg/m <sup>3</sup>	6-10	17
Sulfur Dioxide	6200 Phoenix-Mesa	3,251,876	3-hour: 0.011 ppm 24-hour: 0.007 ppm Annual: 0.0019 ppm	0	2

\*Based on the 2000 United States census.

\*\*Only includes monitors operated by MCAQD; does not include monitors operated by other agencies within the MSA.

## Required General Statement Regarding Changes to the PM<sub>2.5</sub> Network

In the event that MCAQD needed to move or change a violating PM<sub>2.5</sub> monitor the following procedure would be followed: MCAQD would hold a public hearing regarding the requested change. Details and documentation of the requested change, as well as all public comments, would then be forwarded to the EPA for approval. Any action on MCAQD's part will be dependent on EPA approval.

Please note that the previous statement is general in nature and is required to be placed in the annual network review by 40CFR58. MCAQD does not currently have any violating PM<sub>2.5</sub> monitors, nor do we have any proposals to move any PM<sub>2.5</sub> monitors.

## Notes regarding appendix data

**Analysis Method** refers to the method used to process filter-based particulate samples.

**Distance from Supporting Structure** refers to those sample probes that are attached to a supporting structure, such as the side of a building. In most cases the sample probe is located above the supporting structure, in which case the entry will say N/A.

**Distance from Obstructions** refers to those obstructions, both on the roof and off the roof, which are located higher than the probe. In the case of a nearby obstruction being higher than the probe, details of its location will be listed in the entry. If there are no obstructions higher than the probe, then the entry will be N/A.

**BLUE POINT**

County ID: BP

AQS ID: 04-013-9702

Address: Bush Highway &amp; Usery Pass Road, Maricopa County

Coordinates: 33.54549N – 111.60925W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>	
Pollutant/Monitor Type	<b>Ozone</b>
Sampling Schedule	Continuous
Analysis Method	N/A
Any Proposal to Remove or Move Monitor?	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A
<b>-Appendix A Requirements</b>	
# Precision Checks Performed Annually	27
# Precision Checks Passing (Percentage)	27 (100%)
# Accuracy Checks Performed Annually	3
# Accuracy Checks Passing (Percentage)	3 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes
Annual Data Certification Submitted?	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly
Frequency of Flow Rate Verification	N/A
Last Annual Performance Evaluation Date	10/22/07
Last Two Semi-Annual Flow Rate Audit Dates	N/A
<b>-Appendix C Requirements</b>	
Sampler Make & Model	API M400
Date Established	01/01/1993
Classification	SLAMS
Method (FRM, FEM, ARM)	FEM
<b>-Appendix D Requirements</b>	
Monitoring Objective	Max Ozone Concentration
Monitoring Scale	Urban
Sampling Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>-Appendix E Requirements</b>	
Distance between collocated samplers	N/A
Probe Inlet Height	5.3 meters
Airflow Arc	360°
Distance from Supporting Structure	N/A
Distance from Obstructions	N/A
Distance to Furnace Flue	N/A
Spacing from Trees	N/A
Nearest Major Roadway	Bush Highway
Distance and Direction to Road	160 meters, South
Traffic Count (ADT)	1000
Groundcover	Paved

**BUCKEYE**

County ID: BE

AQS ID: 04-013-4011

Address: 26449 W 100<sup>th</sup> DR, Buckeye

Coordinates: 33.37005N – 111.62070W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>				
Pollutant/Monitor Type	<b>Ozone</b>	<b>CO</b>	<b>NO<sub>2</sub></b>	<b>PM<sub>10</sub></b>
Sampling Schedule	Continuous	Continuous	Continuous	Continuous
Analysis Method	N/A	N/A	N/A	N/A
Any Proposal to Remove or Move Monitor?	No	No	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	N/A	N/A	N/A
<b>-Appendix A Requirements</b>				
# Precision Checks Performed Annually	18	15	26	26
# Precision Checks Passing (Percentage)	18 (100%)	15 (100%)	25 (96%)	26 (100%)
# Accuracy Checks Performed Annually	3	2	6	3
# Accuracy Checks Passing (Percentage)	3 (100%)	2 (100%)	4 (67%)	3 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly	Bi-Weekly	Bi-Weekly	N/A
Frequency of Flow Rate Verification	N/A	N/A	N/A	Bi-Weekly
Last Annual Performance Evaluation Date	10/09/07	9/24/07	11/01/0	N/A
Last Two Semi-Annual Flow Rate Audit Dates	N/A	N/A	N/A	3/21/07, 7/24/07
<b>-Appendix C Requirements</b>				
Sampler Make & Model	API M400	API M300	API M200	R&P TEOM
Date Established	08/01/2004	08/01/2004	08/01/2004	08/01/2004
Classification	SLAMS	SLAMS	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FEM	FRM	FRM	FEM
<b>-Appendix D Requirements</b>				
Monitoring Objective	Population Exposure	Population Exposure	Source Oriented	Population Exposure
Monitoring Scale	Neighborhood	Neighborhood	Urban	Neighborhood
Sampling Season	Apr-Oct	Sep-Mar	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes	Yes
<b>-Appendix E Requirements</b>				
Distance between collocated samplers	N/A	N/A	N/A	N/A
Probe Inlet Height	4 meters	4 meters	4 meters	4.5 meters
Airflow Arc	360°	360°	360°	360°
Distance from Supporting Structure	N/A	N/A	N/A	N/A
Distance from Obstructions	N/A	N/A	N/A	N/A
Distance to Furnace Flue	N/A	N/A	N/A	N/A
Spacing from Trees	14 meters, N	14 meters, N	14 meters, N	14 meters, N
Nearest Major Roadway	US Hwy 85	US Hwy 85	US Hwy 85	US Hwy 85
Distance and Direction to Road	31 meters, N	31 meters, N	31 meters, N	31 meters, N
Traffic Count (ADT)	3000	3000	3000	3000
Groundcover	Paved	Paved	Paved	Paved

**CAVE CREEK**

County ID: CC

AQS ID: 04-013-4008

Address: 37019 N Lava Lane, Phoenix

Coordinates: 33.82169N – 112.01739W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>	
Pollutant/Monitor Type	<b>Ozone</b>
Sampling Schedule	Continuous
Analysis Method	N/A
Any Proposal to Remove or Move Monitor?	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A
<b>-Appendix A Requirements</b>	
# Precision Checks Performed Annually	16
# Precision Checks Passing (Percentage)	16 (100%)
# Accuracy Checks Performed Annually	4
# Accuracy Checks Passing (Percentage)	4 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes
Annual Data Certification Submitted?	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly
Frequency of Flow Rate Verification	N/A
Last Annual Performance Evaluation Date	9/18/07
Last Two Semi-Annual Flow Rate Audit Dates	N/A
<b>-Appendix C Requirements</b>	
Sampler Make & Model	API M400
Date Established	07/20/2001
Classification	SLAMS
Method (FRM, FEM, ARM)	FEM
<b>-Appendix D Requirements</b>	
Monitoring Objective	Max Ozone Concentration
Monitoring Scale	Urban
Sampling Season	Apr-Oct
Network Meets Minimum Number of Monitors Required?	Yes
<b>-Appendix E Requirements</b>	
Distance between collocated samplers	N/A
Probe Inlet Height	4.8 meters
Airflow Arc	360°
Distance from Supporting Structure	N/A
Distance from Obstructions	N/A
Distance to Furnace Flue	N/A
Spacing from Trees	20 meters, E
Nearest Major Roadway	32 <sup>nd</sup> Street
Distance and Direction to Road	240 meters, NE
Traffic Count (ADT)	1000
Groundcover	Paved

## CENTRAL PHOENIX

County ID: CP

AQS ID: 04-013-3002

Address: 1645 E Roosevelt, Phoenix

Coordinates: 33.45793N - 112.04601W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>					
Pollutant/Monitor Type	Ozone	CO	NO <sub>2</sub>	SO <sub>2</sub>	PM <sub>10</sub>
Sampling Schedule	Continuous	Continuous	Continuous	Continuous	Continuous
Analysis Method	N/A	N/A	N/A	N/A	N/A
Any Proposal to Remove or Move Monitor?	No	No	No	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	N/A	N/A	N/A	N/A
<b>-Appendix A Requirements</b>					
# Precision Checks Performed Annually	26	25	25	27	31
# Precision Checks Passing (Percentage)	26 (100%)	25 (100%)	24 (96%)	27 (100%)	31 (100%)
# Accuracy Checks Performed Annually	3	3	4	4	3
# Accuracy Checks Passing (Percentage)	3 (100%)	3 (100%)	4 (100%)	4 (100%)	3 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes	Yes	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008	Pending for July 2008	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly	Bi-Weekly	Bi-Weekly	Bi-Weekly	N/A
Frequency of Flow Rate Verification	N/A	N/A	N/A	N/A	Bi-Weekly
Last Annual Performance Evaluation Date	8/22/07	9/27/07	11/23/07	08/02/07	N/A
Last Two Semi-Annual Flow Rate Audit Dates	N/A	N/A	N/A	N/A	3/21/07, 7/23/07
<b>-Appendix C Requirements</b>					
Sampler Make & Model	API M400	API M300	API M200	API M100	R&P TEOM
Date Established	06/01/1967	10/01/1966	01/01/1967	01/01/1965	04/01/1985
Classification	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FEM	FRM	FRM	FEM	FEM
<b>-Appendix D Requirements</b>					
Monitoring Objective	Population Exposure	Population Exposure	Highest Concentration	Highest Concentration	Population Exposure
Monitoring Scale	Neighborhood	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Sampling Season	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes	Yes	Yes
<b>-Appendix E Requirements</b>					
Distance between collocated samplers	N/A	N/A	N/A	N/A	N/A
Probe Inlet Height	11.3 meters	11.3 meters	11.3 meters	11.3 meters	11.3 meters
Airflow Arc	360°	360°	360°	360°	360°
Distance from Supporting Structure	N/A	N/A	N/A	N/A	N/A
Distance from Obstructions	N/A	N/A	N/A	N/A	N/A
Distance to Furnace Flue	N/A	N/A	N/A	N/A	N/A
Spacing from Trees	N/A	N/A	N/A	N/A	N/A
Nearest Major Roadway A	16 <sup>th</sup> Street	16 <sup>th</sup> Street	16 <sup>th</sup> Street	16 <sup>th</sup> Street	16 <sup>th</sup> Street
Distance and Direction to Road	88 meters, W	88 meters, W	88 meters, W	88 meters, W	91 meters, W
Traffic Count (ADT)	24000	24000	24000	24000	24000
Nearest Major Roadway B	Roosevelt St.	Roosevelt St.	Roosevelt St.	Roosevelt St.	Roosevelt St.
Distance and Direction to Road	75 meters, N	75 meters, N	75 meters, N	75 meters, N	75 meters, N
Traffic Count (ADT)	Unknown	Unknown	Unknown	Unknown	Unknown
Groundcover	Paved	Paved	Paved	Paved	Paved

## COYOTE LAKES

County ID: CL

AQS ID: 04-013-4014

Address: 20010 N Coyote Lakes Pkwy, Surprise

Coordinates: 33.666284N – 112.31042W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>	
Pollutant/Monitor Type	<b>PM<sub>10</sub></b>
Sampling Schedule	Continuous
Analysis Method	N/A
Any Proposal to Remove or Move Monitor?	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A
<b>-Appendix A Requirements</b>	
# Precision Checks Performed Annually	19
# Precision Checks Passing (Percentage)	19 (100%)
# Accuracy Checks Performed Annually	1
# Accuracy Checks Passing (Percentage)	1 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes
Annual Data Certification Submitted?	Pending for July 2008
Frequency of One-Point QC Check	N/A
Frequency of Flow Rate Verification	Bi-Weekly
Last Annual Performance Evaluation Date	N/A
Last Two Semi-Annual Flow Rate Audit Dates	7/30/07
<b>-Appendix C Requirements</b>	
Sampler Make & Model	R&P TEOM
Date Established	04/02/2007
Classification	SLAMS
Method (FRM, FEM, ARM)	FEM
<b>-Appendix D Requirements</b>	
Monitoring Objective	Source Oriented
Monitoring Scale	Middle Scale
Sampling Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>-Appendix E Requirements</b>	
Distance between collocated samplers	N/A
Probe Inlet Height	2.6 meters
Airflow Arc	360°
Distance from Supporting Structure	N/A
Distance from Obstructions	N/A
Distance to Furnace Flue	N/A
Spacing from Trees	N/A
Nearest Major Roadway	Coyote Lakes Pkwy
Distance and Direction to Road	54 meters, E
Traffic Count (ADT)	Unknown (residential street)
Groundcover	Gravel/Dirt

**DURANGO COMPLEX**  
County ID: DC  
AQS ID: 04-013-9812  
Address: 2702 RC Esterbrooks Blvd, Phoenix  
Coordinates: 33.42650N -112.11814W  
Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>		
Pollutant/Monitor Type	<b>PM<sub>10</sub></b>	<b>PM<sub>2.5</sub></b>
Sampling Schedule	Continuous	Continuous
Analysis Method	N/A	N/A
Any Proposal to Remove or Move Monitor?	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	Yes
<b>-Appendix A Requirements</b>		
# Precision Checks Performed Annually	28	32
# Precision Checks Passing (Percentage)	28 (100%)	32 (100%)
# Accuracy Checks Performed Annually	4	2
# Accuracy Checks Passing (Percentage)	4 (100%)	2 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	N/A	N/A
Frequency of Flow Rate Verification	Bi-Weekly	Bi-Weekly
Last Annual Performance Evaluation Date	N/A	N/A
Last Two Semi-Annual Flow Rate Audit Dates	7/25/07, 11/26/07	7/25/07, 11/26/07
<b>-Appendix C Requirements</b>		
Sampler Make & Model	R&P TEOM	R&P FDMS-TEOM
Date Established	07/01/1999	07/01/2005
Classification	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FEM	None
<b>-Appendix D Requirements</b>		
Monitoring Objective	Highest Concentration	Highest Concentration
Monitoring Scale	Middle	Middle
Sampling Season	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes
<b>-Appendix E Requirements</b>		
Distance between collocated samplers	N/A	N/A
Probe Inlet Height	3.9 meters	4.8 meters
Airflow Arc	360°	360°
Distance from Supporting Structure	N/A	N/A
Distance from Obstructions	N/A	N/A
Distance to Furnace Flue	N/A	N/A
Spacing from Trees	14 meters, S	14 meters, S
Nearest Major Roadway	27 <sup>th</sup> Ave	27 <sup>th</sup> Ave
Distance and Direction to Road	78 meters, E	76 meters, E
Traffic Count (ADT)	16000	16000
Groundcover	Paved	Paved

**DYSART**

County ID: DY

AQS ID: 04-013-4010

Address: 16825 N Dysart Rd, Surprise

Coordinates: 33.63713N – 112.34184W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>			
Pollutant/Monitor Type	<b>Ozone</b>	<b>CO</b>	<b>PM<sub>10</sub></b>
Sampling Schedule	Continuous	Continuous	1 in 6 days
Analysis Method	N/A	N/A	Filters weighed in-house
Any Proposal to Remove or Move Monitor?	No	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	N/A	N/A
<b>-Appendix A Requirements</b>			
# Precision Checks Performed Annually	16	13	N/A
# Precision Checks Passing (Percentage)	16 (100%)	13 (100%)	N/A
# Accuracy Checks Performed Annually	3	2	2
# Accuracy Checks Passing (Percentage)	3 (100%)	2 (100%)	2 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly	Bi-Weekly	N/A
Frequency of Flow Rate Verification	N/A	N/A	Monthly
Last Annual Performance Evaluation Date	9/17/07	09/19/07	N/A
Last Two Semi-Annual Flow Rate Audit Dates	N/A	N/A	3/28/07, 11/05/07
<b>-Appendix C Requirements</b>			
Sampler Make & Model	API M400	API M300	Anderson SSI
Date Established	7/21/2003	09/01/2003	07/14/2003
Classification	SLAMS	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FEM	FRM	FRM
<b>-Appendix D Requirements</b>			
Monitoring Objective	Population Exposure	Population Exposure	Population Exposure
Monitoring Scale	Neighborhood	Neighborhood	Neighborhood
Sampling Season	Apr-Oct	Sep-Mar	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes
<b>-Appendix E Requirements</b>			
Distance between collocated samplers	N/A	N/A	N/A
Probe Inlet Height	3.3 meters	3.3 meters	2.6 meters
Airflow Arc	360°	360°	360°
Distance from Supporting Structure	N/A	N/A	N/A
Distance from Obstructions	N/A	N/A	N/A
Distance to Furnace Flue	N/A	N/A	N/A
Spacing from Trees	N/A	N/A	N/A
Nearest Major Roadway A	Dysart	Dysart	Dysart
Distance and Direction to Road	17 meters, W	17 meters, W	12 meters, W
Traffic Count (ADT)	12000	12000	12000
Nearest Major Roadway B	Bell Rd	Bell Rd	Bell Rd
Distance and Direction to Road	495 meters, N	495 meters, N	460 meters, N
Traffic Count (ADT)	43000	43000	43000
Groundcover	Paved/Gravel	Paved/Gravel	Paved/Gravel

**FALCON FIELD**

County ID: FF

AQS ID: 04-013-1010

Address: 4530 E McKellips Rd, Mesa

Coordinates: 33.45223N – 111.73331W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>	
Pollutant/Monitor Type	<b>Ozone</b>
Sampling Schedule	Continuous
Analysis Method	N/A
Any Proposal to Remove or Move Monitor?	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A
<b>-Appendix A Requirements</b>	
# Precision Checks Performed Annually	16
# Precision Checks Passing (Percentage)	16 (100%)
# Accuracy Checks Performed Annually	2
# Accuracy Checks Passing (Percentage)	2 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes
Annual Data Certification Submitted?	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly
Frequency of Flow Rate Verification	N/A
Last Annual Performance Evaluation Date	10/10/07
Last Two Semi-Annual Flow Rate Audit Dates	N/A
<b>-Appendix C Requirements</b>	
Sampler Make & Model	API M400
Date Established	06/01/1989
Classification	SLAMS
Method (FRM, FEM, ARM)	FEM
<b>-Appendix D Requirements</b>	
Monitoring Objective	Population Exposure
Monitoring Scale	Neighborhood
Sampling Season	Apr-Oct
Network Meets Minimum Number of Monitors Required?	Yes
<b>-Appendix E Requirements</b>	
Distance between collocated samplers	N/A
Probe Inlet Height	9.3 meters
Airflow Arc	360°
Distance from Supporting Structure	N/A
Distance from Obstructions	N/A
Distance to Furnace Flue	N/A
Spacing from Trees	N/A
Nearest Major Roadway	McKellips
Distance and Direction to Road	58 meters, S
Traffic Count (ADT)	29000
Groundcover	Paved

## FOUNTAIN HILLS

County ID: FH

AQS ID: 04-013-9704

Address: 16426 E Palisades Blvd, Fountain Hills

Coordinates: 33.61103N – 111.72529W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>	
Pollutant/Monitor Type	<b>Ozone</b>
Sampling Schedule	Continuous
Analysis Method	N/A
Any Proposal to Remove or Move Monitor?	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A
<b>-Appendix A Requirements</b>	
# Precision Checks Performed Annually	26
# Precision Checks Passing (Percentage)	26 (100%)
# Accuracy Checks Performed Annually	3
# Accuracy Checks Passing (Percentage)	3 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes
Annual Data Certification Submitted?	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly
Frequency of Flow Rate Verification	N/A
Last Annual Performance Evaluation Date	9/24/07
Last Two Semi-Annual Flow Rate Audit Dates	N/A
<b>-Appendix C Requirements</b>	
Sampler Make & Model	API M400
Date Established	04/01/1996
Classification	SLAMS
Method (FRM, FEM, ARM)	FEM
<b>-Appendix D Requirements</b>	
Monitoring Objective	Max Ozone Concentration
Monitoring Scale	Neighborhood
Sampling Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>-Appendix E Requirements</b>	
Distance between collocated samplers	N/A
Probe Inlet Height	4.3 meters
Airflow Arc	360°
Distance from Supporting Structure	N/A
Distance from Obstructions	Canopy 1 meter higher than probe, located 9 meters to the south
Distance to Furnace Flue	N/A
Spacing from Trees	15 meters, W
Nearest Major Roadway	Palisades Blvd
Distance and Direction to Road	70 meters, SW
Traffic Count (ADT)	8000
Groundcover	Paved

## GLENDALE

County ID: GL

AQS ID: 04-013-2001

Address: 6001 W Olive, Glendale

Coordinates: 33.56936N – 112.19153W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>			
Pollutant/Monitor Type	<b>Ozone</b>	<b>CO</b>	<b>PM<sub>10</sub></b>
Sampling Schedule	Continuous	Continuous	1 in 6 day
Analysis Method	N/A	N/A	Filters Weighed In-House
Any Proposal to Remove or Move Monitor?	No	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	N/A	N/A
<b>-Appendix A Requirements</b>			
# Precision Checks Performed Annually	17	14	N/A
# Precision Checks Passing (Percentage)	17 (100%)	14 (100%)	N/A
# Accuracy Checks Performed Annually	3	1	2
# Accuracy Checks Passing (Percentage)	3 (100%)	1 (100%)	2 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly	Bi-Weekly	N/A
Frequency of Flow Rate Verification	N/A	N/A	Monthly
Last Annual Performance Evaluation Date	09/10/07	02/01/07	N/A
Last Two Semi-Annual Flow Rate Audit Dates	N/A	N/A	3/28/07, 11/5/07
<b>-Appendix C Requirements</b>			
Sampler Make & Model	API M400	API M300	Anderson SSI
Date Established	01/01/1974	01/01/1974	07/01/1987
Classification	SLAMS	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FEM	FRM	FRM
<b>-Appendix D Requirements</b>			
Monitoring Objective	Population Exposure	Population Exposure	Population Exposure
Monitoring Scale	Neighborhood	Neighborhood	Neighborhood
Sampling Season	Apr-Oct	Sep-Mar	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes
<b>-Appendix E Requirements</b>			
Distance between collocated samplers	N/A	N/A	N/A
Probe Inlet Height	6.0 meters	6.0 meters	7.4 meters
Airflow Arc	360°	360°	360°
Distance from Supporting Structure	N/A	N/A	N/A
Distance from Obstructions	N/A	N/A	N/A
Distance to Furnace Flue	N/A	N/A	N/A
Spacing from Trees	N/A	N/A	N/A
Nearest Major Roadway A	Olive Ave	Olive Ave	Olive Ave
Distance and Direction to Road	225 meters, S	225 meters, S	227 meters, S
Traffic Count (ADT)	25000	25000	25000
Nearest Major Roadway B	59 <sup>th</sup> Ave	59 <sup>th</sup> Ave	59 <sup>th</sup> Ave
Distance and Direction to Road	475 meters, E	475 meters, E	430 meters, E
Traffic Count (ADT)	30500	30500	30500
Groundcover	Paved	Paved	Paved

## GREENWOOD

County ID: GR

AQS ID: 04-013-3010

Address: 1128 N 27<sup>th</sup> Ave., Phoenix

Coordinates: 33.46093N – 112.11748W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>			
Pollutant/Monitor Type	CO	NO <sub>2</sub>	PM <sub>10</sub>
Sampling Schedule	Continuous	Continuous	Continuous
Analysis Method	N/A	N/A	N/A
Any Proposal to Remove or Move Monitor?	No	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	N/A	N/A
<b>-Appendix A Requirements</b>			
# Precision Checks Performed Annually	26	26	26
# Precision Checks Passing (Percentage)	26 (100%)	26 (100%)	26 (100%)
# Accuracy Checks Performed Annually	4	4	5
# Accuracy Checks Passing (Percentage)	4 (100%)	4 (100%)	5 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly	Bi-Weekly	N/A
Frequency of Flow Rate Verification	N/A	N/A	Bi-Weekly
Last Annual Performance Evaluation Date	12/19/07	12/19/07	N/A
Last Two Semi-Annual Flow Rate Audit Dates	N/A	N/A	8/29/07, 9/5/07
<b>-Appendix C Requirements</b>			
Sampler Make & Model	API M300	API M200	R&P TEOM
Date Established	11/01/1993	11/01/1993	11/01/1993
Classification	SLAMS	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FRM	FRM	FEM
<b>-Appendix D Requirements</b>			
Monitoring Objective	Population Exposure	Population Exposure	Population Exposure
Monitoring Scale	Middle	Middle	Middle
Sampling Season	Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes
<b>-Appendix E Requirements</b>			
Distance between collocated samplers	N/A	N/A	N/A
Probe Inlet Height	4.2 meters	4.2 meters	4.4 meters
Airflow Arc	360°	360°	360°
Distance from Supporting Structure	N/A	N/A	N/A
Distance from Obstructions	N/A	N/A	N/A
Distance to Furnace Flue	N/A	N/A	N/A
Spacing from Trees	20 meters, NW	20 meters, NW	20 meters, NW
Nearest Major Roadway A	27 <sup>th</sup> Ave	27 <sup>th</sup> Ave	27 <sup>th</sup> Ave
Distance and Direction to Road	10 meters, E	10 meters, E	10 meters, E
Traffic Count (ADT)	18500	18500	18500
Nearest Major Roadway B	I-10	I-10	I-10
Distance and Direction to Road	85 meters, N	85 meters, N	85 meters, N
Traffic Count (ADT)	229000	229000	229000
Groundcover	Paved	Paved	Paved

**HIGLEY**

County ID: HI

AQS ID: 04-013-4006

Address: 15400 South Higley Road, Gilbert

Coordinates: 33.31074N – 111.72255W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>	
Pollutant/Monitor Type	<b>PM<sub>10</sub></b>
Sampling Schedule	Continuous
Analysis Method	N/A
Any Proposal to Remove or Move Monitor?	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A
<b>-Appendix A Requirements</b>	
# Precision Checks Performed Annually	27
# Precision Checks Passing (Percentage)	27 (100%)
# Accuracy Checks Performed Annually	2
# Accuracy Checks Passing (Percentage)	2 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes
Annual Data Certification Submitted?	Pending for July 2008
Frequency of One-Point QC Check	N/A
Frequency of Flow Rate Verification	Bi-Weekly
Last Annual Performance Evaluation Date	N/A
Last Two Semi-Annual Flow Rate Audit Dates	2/02/07, 8/28/07
<b>-Appendix C Requirements</b>	
Sampler Make & Model	R&P TEOM
Date Established	07/01/2000
Classification	SLAMS
Method (FRM, FEM, ARM)	FEM
<b>-Appendix D Requirements</b>	
Monitoring Objective	Population Exposure
Monitoring Scale	Neighborhood
Sampling Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>-Appendix E Requirements</b>	
Distance between collocated samplers	N/A
Probe Inlet Height	2.9 meters
Airflow Arc	360°
Distance from Supporting Structure	N/A
Distance from Obstructions	N/A
Distance to Furnace Flue	N/A
Spacing from Trees	N/A
Nearest Major Roadway A	Higley Rd
Distance and Direction to Road	117 meters, E
Traffic Count (ADT)	11500
Nearest Major Roadway B	Williams Field Rd
Distance and Direction to Road	410 meters, S
Traffic Count (ADT)	11500
Groundcover	Paved

## HUMBOLDT MOUNTAIN

County ID: HM

AQS ID: 04-013-9508

Address: Seven Springs Rd-FAA Radar Station, Tonto National Forest

Coordinates: 33.98280N – 111.79870W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>	
Pollutant/Monitor Type	<b>Ozone</b>
Sampling Schedule	Continuous
Analysis Method	N/A
Any Proposal to Remove or Move Monitor?	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A
<b>-Appendix A Requirements</b>	
# Precision Checks Performed Annually	18
# Precision Checks Passing (Percentage)	18 (100%)
# Accuracy Checks Performed Annually	3
# Accuracy Checks Passing (Percentage)	3 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes
Annual Data Certification Submitted?	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly
Frequency of Flow Rate Verification	N/A
Last Annual Performance Evaluation Date	8/28/07
Last Two Semi-Annual Flow Rate Audit Dates	N/A
<b>-Appendix C Requirements</b>	
Sampler Make & Model	API M400
Date Established	01/01/1993
Classification	SLAMS
Method (FRM, FEM, ARM)	FEM
<b>-Appendix D Requirements</b>	
Monitoring Objective	Max Ozone Concentration
Monitoring Scale	Regional
Sampling Season	Apr-Oct
Network Meets Minimum Number of Monitors Required?	Yes
<b>-Appendix E Requirements</b>	
Distance between collocated samplers	N/A
Probe Inlet Height	4.5 meters
Airflow Arc	360°
Distance from Supporting Structure	N/A
Distance from Obstructions	N/A
Distance to Furnace Flue	N/A
Spacing from Trees	N/A
Nearest Major Roadway	N/A (Remote mountaintop site, only reachable by small access road)
Distance and Direction to Road	N/A
Traffic Count (ADT)	N/A
Groundcover	Dirt/Vegetated

**MESA**  
 County ID: ME  
 AQS ID: 04-013-1003  
 Address: 310 S Brooks, Mesa  
 Coordinates: 33.41045N – 111.86507W  
 Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>			
Pollutant/Monitor Type	<b>CO</b>	<b>PM<sub>2.5</sub></b>	<b>PM<sub>10</sub></b>
Sampling Schedule	Continuous	1 in 3 day	1 in 6 day
Analysis Method	N/A	Filters Weighed In-House	Filters Weighed In-house
Any Proposal to Remove or Move Monitor?	No	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	Yes	N/A
<b>-Appendix A Requirements</b>			
# Precision Checks Performed Annually	18	N/A	60
# Precision Checks Passing (Percentage)	18 (100%)	N/A	60 (100%)
# Accuracy Checks Performed Annually	3	1	1
# Accuracy Checks Passing (Percentage)	3 (100%)	1 (100%)	1(100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly	N/A	N/A
Frequency of Flow Rate Verification	N/A	Every 6 Weeks	Monthly
Last Annual Performance Evaluation Date	10/10/07	N/A	N/A
Last Two Semi-Annual Flow Rate Audit Dates	N/A	4/5/07	03/23/07
<b>-Appendix C Requirements</b>			
Sampler Make & Model	API M400	R&P 2025	Anderson SSI
Date Established	01/01/1978	04/28/2005	01/23/1990
Classification	SLAMS	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FEM	FRM	FRM
<b>-Appendix D Requirements</b>			
Monitoring Objective	Population Exposure	Population Exposure	Population Exposure
Monitoring Scale	Neighborhood	Neighborhood	Neighborhood
Sampling Season	Sep-Mar	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes
<b>-Appendix E Requirements</b>			
Distance between collocated samplers	N/A	N/A	3.3 meters
Probe Inlet Height	7 meters	6.9 meters	6.2 meters
Airflow Arc	360°	360°	360°
Distance from Supporting Structure	N/A	N/A	N/A
Distance from Obstructions	N/A	N/A	N/A
Distance to Furnace Flue	N/A	N/A	N/A
Spacing from Trees	N/A	N/A	N/A
Nearest Major Roadway	Broadway Rd.	Broadway Rd.	Broadway Rd.
Distance and Direction to Road	305 meters, S	305 meters, S	305 meters, S
Traffic Count (ADT)	33000	33000	33000
Groundcover	Paved/Gravel	Paved/Gravel	Paved/Gravel

## NORTH PHOENIX

County ID: NP

AQS ID: 04-013-1004

Address: 601 E Butler Dr., Phoenix

Coordinates: 33.56033N – 112.06626W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>			
Pollutant/Monitor Type	<b>Ozone</b>	<b>CO</b>	<b>PM<sub>10</sub></b>
Sampling Schedule	Continuous	Continuous	1 in 6 day
Analysis Method	N/A	N/A	Filters Weighed In-House
Any Proposal to Remove or Move Monitor?	No	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	N/A	N/A
<b>-Appendix A Requirements</b>			
# Precision Checks Performed Annually	25	12	N/A
# Precision Checks Passing (Percentage)	25 (100%)	12 (100%)	N/A
# Accuracy Checks Performed Annually	3	2	0
# Accuracy Checks Passing (Percentage)	3 (100%)	2 (100%)	N/A
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly	Bi-Weekly	N/A
Frequency of Flow Rate Verification	N/A	N/A	Monthly
Last Annual Performance Evaluation Date	08/06/07	01/23/07	N/A
Last Two Semi-Annual Flow Rate Audit Dates	N/A	N/A	N/A
<b>-Appendix C Requirements</b>			
Sampler Make & Model	API M400	API M300	Anderson SSI
Date Established	01/01/1975	01/01/1974	01/05/1990
Classification	SLAMS	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FEM	FRM	FRM
<b>-Appendix D Requirements</b>			
Monitoring Objective	Population Exposure	Population Exposure	Population Exposure
Monitoring Scale	Neighborhood	Neighborhood	Neighborhood
Sampling Season	Jan-Dec	Sep-Mar	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes
<b>-Appendix E Requirements</b>			
Distance between collocated samplers	N/A	N/A	N/A
Probe Inlet Height	4.6 meters	4.6 meters	4.4 meters
Airflow Arc	360°	360°	360°
Distance from Supporting Structure	N/A	N/A	N/A
Distance from Obstructions	N/A	N/A	N/A
Distance to Furnace Flue	N/A	N/A	N/A
Spacing from Trees	N/A	N/A	N/A
Nearest Major Roadway	7 <sup>th</sup> Street	7 <sup>th</sup> Street	7 <sup>th</sup> Street
Distance and Direction to Road	75 meters, E	75 meters, E	75 meters, E
Traffic Count (ADT)	32000	32000	32000
Groundcover	Gravel	Gravel	Gravel

**PINNACLE PEAK**

County ID: PP

AQS ID: 04-013-2005

Address: 25000 N Windy Walk, Scottsdale

Coordinates: 33.71231N – 111.85272W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>	
Pollutant/Monitor Type	<b>Ozone</b>
Sampling Schedule	Continuous
Analysis Method	N/A
Any Proposal to Remove or Move Monitor?	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A
<b>-Appendix A Requirements</b>	
# Precision Checks Performed Annually	26
# Precision Checks Passing (Percentage)	26 (100%)
# Accuracy Checks Performed Annually	3
# Accuracy Checks Passing (Percentage)	3 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes
Annual Data Certification Submitted?	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly
Frequency of Flow Rate Verification	N/A
Last Annual Performance Evaluation Date	9/26/07
Last Two Semi-Annual Flow Rate Audit Dates	N/A
<b>-Appendix C Requirements</b>	
Sampler Make & Model	API M400
Date Established	02/01/1988
Classification	SLAMS
Method (FRM, FEM, ARM)	FEM
<b>-Appendix D Requirements</b>	
Monitoring Objective	Max Ozone Concentration
Monitoring Scale	Urban
Sampling Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>-Appendix E Requirements</b>	
Distance between collocated samplers	N/A
Probe Inlet Height	11.9 meters
Airflow Arc	360°
Distance from Supporting Structure	N/A
Distance from Obstructions	N/A
Distance to Furnace Flue	N/A
Spacing from Trees	N/A
Nearest Major Roadway	Happy Valley Rd.
Distance and Direction to Road	61 meters, S
Traffic Count (ADT)	16000
Groundcover	Paved/Grass

**RIO VERDE**  
 County ID: RV  
 AQS ID: 04-013-9706  
 Address: 25608 N Forest Rd., Rio Verde  
 Coordinates: 33.71881N – 111.67183W  
 Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>	
Pollutant/Monitor Type	<b>Ozone</b>
Sampling Schedule	Continuous
Analysis Method	N/A
Any Proposal to Remove or Move Monitor?	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A
<b>-Appendix A Requirements</b>	
# Precision Checks Performed Annually	17
# Precision Checks Passing (Percentage)	17 (100%)
# Accuracy Checks Performed Annually	3
# Accuracy Checks Passing (Percentage)	3 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes
Annual Data Certification Submitted?	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly
Frequency of Flow Rate Verification	N/A
Last Annual Performance Evaluation Date	7/03/07
Last Two Semi-Annual Flow Rate Audit Dates	N/A
<b>-Appendix C Requirements</b>	
Sampler Make & Model	API M400
Date Established	01/01/1997
Classification	SLAMS
Method (FRM, FEM, ARM)	FEM
<b>-Appendix D Requirements</b>	
Monitoring Objective	Max Ozone Concentration
Monitoring Scale	Urban
Sampling Season	Apr-Oct
Network Meets Minimum Number of Monitors Required?	Yes
<b>-Appendix E Requirements</b>	
Distance between collocated samplers	N/A
Probe Inlet Height	6.2 meters
Airflow Arc	360°
Distance from Supporting Structure	N/A
Distance from Obstructions	N/A
Distance to Furnace Flue	N/A
Spacing from Trees	16 meters, S
Nearest Major Roadway	Forest Rd
Distance and Direction to Road	43 meters, E
Traffic Count (ADT)	Unknown
Groundcover	Paved

## SOUTH PHOENIX

County ID: SP

AQS ID: 04-013-4003

Address: 33 W Tamarisk, Phoenix

Coordinates: 33.40316N – 112.07533W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>					
Pollutant/Monitor Type	<b>Ozone</b>	<b>CO</b>	<b>PM<sub>2.5</sub></b>	<b>PM<sub>10</sub></b>	<b>PM<sub>10</sub></b>
Sampling Schedule	Continuous	Continuous	1 in 3 day	1 in 6 day	Continuous
Analysis Method	N/A	N/A	Filters Weighed In-House	Filters Weighed In-House	N/A
Any Proposal to Remove or Move Monitor?	No	No	No	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	N/A	N/A	N/A	N/A
<b>-Appendix A Requirements</b>					
# Precision Checks Performed Annually	27	16	N/A	N/A	12
# Precision Checks Passing (Percentage)	26 (96%)	16 (100%)	N/A	N/A	12 (100%)
# Accuracy Checks Performed Annually	3	2	0	0*	0*
# Accuracy Checks Passing (Percentage)	3 (100%)	2 (100%)	N/A	0	0
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes	Yes	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008	Pending for July 2008	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly	Bi-Weekly	N/A	N/A	N/A
Frequency of Flow Rate Verification	N/A	N/A	Every 6 Weeks	Monthly	Bi-Monthly
Last Annual Performance Evaluation Date	10/10/07	10/10/07	N/A	N/A	N/A
Last Two Semi-Annual Flow Rate Audit Dates	N/A	N/A	N/A	N/A	N/A
<b>-Appendix C Requirements</b>					
Sampler Make & Model	API M400	API M300	R&P 2025	Anderson SSI	R&P TEOM
Date Established	10/01/1999	10/01/1999	01/01/2005	10/01/1999	7/1/2007
Classification	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FEM	FRM	FRM	FRM	FEM
<b>-Appendix D Requirements</b>					
Monitoring Objective	Population Exposure	Population Exposure	Population Exposure	Population Exposure	Population Exposure
Monitoring Scale	Neighborhood	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Sampling Season	Jan-Dec	Sep-Mar	Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes	Yes	Yes
<b>-Appendix E Requirements</b>					
Distance between collocated samplers	N/A	N/A	N/A	N/A	N/A
Probe Inlet Height	4.9 meters	4.9 meters	5.5 meters	4.9 meters	5.4 meters
Airflow Arc	360°	360°	360°	360°	360°
Distance from Supporting Structure	N/A	N/A	N/A	N/A	N/A
Distance from Obstructions	N/A	N/A	N/A	N/A	N/A
Distance to Furnace Flue	N/A	N/A	N/A	N/A	N/A
Spacing from Trees	N/A	N/A	N/A	N/A	N/A
Nearest Major Roadway A	Central Ave	Central Ave	Central Ave	Central Ave	Central Ave
Distance and Direction to Road	168 meters, E	168 meters, E	168 meters, E	165 meters, E	165 meters, E
Traffic Count (ADT)	24000	24000	24000	24000	24000
Nearest Major Roadway B	Broadway Rd	Broadway Rd	Broadway Rd	Broadway Rd	Broadway Rd
Distance and Direction to Road	385 meters, N	385 meters, N	385 meters, N	385 meters, N	35 meters, W
Traffic Count (ADT)	18000	18000	18000	13000	13000
Groundcover	Paved	Paved	Paved	Paved	Paved

\*Filter-based monitoring discontinued in June 2008, continuous monitoring started in July 2008.

## SOUTH SCOTTSDALE

County ID: SS

AQS ID: 04-013-3003

Address: 2857 N Miller Rd., Scottsdale

Coordinates: 33.47968N – 111.91721W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>					
Pollutant/Monitor Type	Ozone	CO	NO <sub>2</sub>	SO <sub>2</sub>	PM <sub>10</sub>
Sampling Schedule	Continuous	Continuous	Continuous	Continuous	1 in 6 day
Analysis Method	N/A	N/A	N/A	N/A	Filters Weighed In-House
Any Proposal to Remove or Move Monitor?	No	No	No	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	N/A	N/A	N/A	N/A
<b>-Appendix A Requirements</b>					
# Precision Checks Performed Annually	25	15	28	27	N/A
# Precision Checks Passing (Percentage)	25 (100%)	15 (100%)	25 (89%)	27 (100%)	N/A
# Accuracy Checks Performed Annually	4	1	3	5	0
# Accuracy Checks Passing (Percentage)	4 (100%)	1 (100%)	3 (100%)	5 (100%)	N/A
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes	Yes	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008	Pending for July 2008	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly	Bi-Weekly	Bi-Weekly	Bi-Weekly	N/A
Frequency of Flow Rate Verification	N/A	N/A	N/A	N/A	Monthly
Last Annual Performance Evaluation Date	12/17/07	10/17/07	10/17/07	08/27/07	N/A
Last Two Semi-Annual Flow Rate Audit Dates	N/A	N/A	N/A	N/A	N/A
<b>-Appendix C Requirements</b>					
Sampler Make & Model	API M400	API M300	API M200	API M100	Anderson SSI
Date Established	01/01/1974	01/01/1974	10/01/1975	01/01/1984	07/01/1987
Classification	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FEM	FRM	FRM	FEM	FRM
<b>-Appendix D Requirements</b>					
Monitoring Objective	Population Exposure	Population Exposure	Population Exposure	Population Exposure	Population Exposure
Monitoring Scale	Neighborhood	Neighborhood	Urban	Neighborhood	Neighborhood
Sampling Season	Jan-Dec	Sep-Mar	Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes	Yes	Yes
<b>-Appendix E Requirements</b>					
Distance between collocated samplers	N/A	N/A	N/A	N/A	6.5 meters
Probe Inlet Height	5.8 meters	5.8 meters	5.8 meters	5.8 meters	5.1 meters
Airflow Arc	360°	360°	360°	360°	360°
Distance from Supporting Structure	N/A	N/A	N/A	N/A	N/A
Distance from Obstructions	N/A	N/A	N/A	N/A	N/A
Distance to Furnace Flue	N/A	N/A	N/A	N/A	N/A
Spacing from Trees	14 meters, S	14 meters, S	14 meters, S	14 meters, S	14 meters, S
Nearest Major Roadway A	Thomas	Thomas	Thomas	Thomas	Thomas
Distance and Direction to Road	66 meters, N	66 meters, N	66 meters, N	66 meters, N	62 meters, N
Traffic Count (ADT)	33000	33000	33000	33000	33000
Nearest Major Roadway B	Miller	Miller	Miller	Miller	Miller
Distance and Direction to Road	32 meters, W	32 meters, W	32 meters, W	32 meters, W	35 meters, W
Traffic Count (ADT)	13000	13000	13000	13000	13000
Groundcover	Paved	Paved	Paved	Paved	Paved

**TEMPE**

County ID: TE

AQS ID: 04-013-4005

Address: 1525 S College, Tempe

Coordinates: 33.4124N – 111.93473W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>		
Pollutant/Monitor Type	<b>Ozone</b>	<b>CO</b>
Sampling Schedule	Continuous	Continuous
Analysis Method	N/A	N/A
Any Proposal to Remove or Move Monitor?	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	N/A
<b>-Appendix A Requirements</b>		
# Precision Checks Performed Annually	17	16
# Precision Checks Passing (Percentage)	17 (100%)	16 (100%)
# Accuracy Checks Performed Annually	3	1
# Accuracy Checks Passing (Percentage)	3 (100%)	1 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly	Bi-Weekly
Frequency of Flow Rate Verification	N/A	N/A
Last Annual Performance Evaluation Date	5/24/07	02/05/07
Last Two Semi-Annual Flow Rate Audit Dates	N/A	N/A
<b>-Appendix C Requirements</b>		
Sampler Make & Model	API M400	API M300
Date Established	07/01/2000	07/01/2000
Classification	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FEM	FRM
<b>-Appendix D Requirements</b>		
Monitoring Objective	Population Exposure	Population Exposure
Monitoring Scale	Neighborhood	Neighborhood
Sampling Season	Jan-Dec	Sep-Mar
Network Meets Minimum Number of Monitors Required?	Yes	Yes
<b>-Appendix E Requirements</b>		
Distance between collocated samplers	N/A	N/A
Probe Inlet Height	4.4 meters	4.4 meters
Airflow Arc	360°	360°
Distance from Supporting Structure	N/A	N/A
Distance from Obstructions	N/A	N/A
Distance to Furnace Flue	N/A	N/A
Spacing from Trees	N/A	N/A
Nearest Major Roadway A	College Ave	College Ave
Distance and Direction to Road	11 meters, W	11 meters, W
Traffic Count (ADT)	Unknown (secondary street)	Unknown (secondary street)
Nearest Major Roadway B	Apache	Apache
Distance and Direction to Road	370 meters, N	370 meters, N
Traffic Count (ADT)	25000	25000
Groundcover	Gravel	Gravel

## WEST CHANDLER

County ID: WC

AQS ID: 04-013-4004

Address: 275 S Ellis, Chandler

Coordinates: 33.29898N – 111.88431W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>			
Pollutant/Monitor Type	Ozone	CO	PM <sub>10</sub>
Sampling Schedule	Continuous	Continuous	Continuous
Analysis Method	N/A	N/A	Filters weighed in-house
Any Proposal to Remove or Move Monitor?	No	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	N/A	N/A
<b>-Appendix A Requirements</b>			
# Precision Checks Performed Annually	16	16	N/A
# Precision Checks Passing (Percentage)	16 (100%)	16 (100%)	N/A
# Accuracy Checks Performed Annually	2	1	0
# Accuracy Checks Passing (Percentage)	2 (100%)	1 (100%)	N/A
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly	Bi-Weekly	N/A
Frequency of Flow Rate Verification	N/A	N/A	Monthly
Last Annual Performance Evaluation Date	9/12/07	01/23/07	N/A
Last Two Semi-Annual Flow Rate Audit Dates	N/A	N/A	N/A
<b>-Appendix C Requirements</b>			
Sampler Make & Model	API M400	API M300	Anderson SSI
Date Established	07/01/2000	07/01/2000	07/01/2000
Classification	SLAMS	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FEM	FRM	FRM
<b>-Appendix D Requirements</b>			
Monitoring Objective	Population Exposure	Population Exposure	Population Exposure
Monitoring Scale	Neighborhood	Neighborhood	Middle
Sampling Season	Apr-Oct	Sep-Mar	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes
<b>-Appendix E Requirements</b>			
Distance between collocated samplers	N/A	N/A	N/A
Probe Inlet Height	4.4 meters	4.4 meters	4.4 meters
Airflow Arc	360°	360°	360°
Distance from Supporting Structure	N/A	N/A	N/A
Distance from Obstructions	N/A	N/A	N/A
Distance to Furnace Flue	N/A	N/A	N/A
Spacing from Trees	14 meters, E	14 meters, E	14 meters, E
Nearest Major Roadway A	Frye Rd	Frye Rd	Frye Rd
Distance and Direction to Road	23 meters, S	23 meters, S	25 meters, S
Traffic Count (ADT)	Unknown (secondary street)	Unknown (secondary street)	Unknown (secondary street)
Nearest Major Roadway B	Ellis St	Ellis St	Ellis St
Distance and Direction to Road	73 meters, W	73 meters, W	71 meters, W
Traffic Count (ADT)	Unknown (secondary street)	Unknown (secondary street)	Unknown (secondary street)
Groundcover	Paved/Gravel	Paved/Gravel	Paved/Gravel

**WEST 43RD AVENUE**

County ID: WF

AQS ID: 04-013-4009

Address: 3940 W Broadway, Phoenix

Coordinates: 33.40642N – 112.14434W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>	
Pollutant/Monitor Type	<b>PM<sub>10</sub></b>
Sampling Schedule	Continuous
Analysis Method	N/A
Any Proposal to Remove or Move Monitor?	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A
<b>-Appendix A Requirements</b>	
# Precision Checks Performed Annually	25
# Precision Checks Passing (Percentage)	25 (100%)
# Accuracy Checks Performed Annually	1
# Accuracy Checks Passing (Percentage)	1 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes
Annual Data Certification Submitted?	Pending for July 2008
Frequency of One-Point QC Check	N/A
Frequency of Flow Rate Verification	Bi-Weekly
Last Annual Performance Evaluation Date	N/A
Last Two Semi-Annual Flow Rate Audit Dates	2/6/07
<b>-Appendix C Requirements</b>	
Sampler Make & Model	R&P TEOM
Date Established	04/01/2002
Classification	SLAMS
Method (FRM, FEM, ARM)	FEM
<b>-Appendix D Requirements</b>	
Monitoring Objective	Highest Concentrations
Monitoring Scale	Middle
Sampling Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>-Appendix E Requirements</b>	
Distance between collocated samplers	N/A
Probe Inlet Height	5 meters
Airflow Arc	360°
Distance from Supporting Structure	N/A
Distance from Obstructions	N/A
Distance to Furnace Flue	N/A
Spacing from Trees	N/A
Nearest Major Roadway	Broadway Road
Distance and Direction to Road	37 meters, SE
Traffic Count (ADT)	Unknown
Groundcover	Gravel

## WEST INDIAN SCHOOL ROAD

County ID: WI

AQS ID: 04-013-0016

Address: 3315 W Indian School Rd, Phoenix

Coordinates: 33.49462N – 112.13095W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>	
Pollutant/Monitor Type	<b>CO</b>
Sampling Schedule	Continuous
Analysis Method	N/A
Any Proposal to Remove or Move Monitor?	Yes, consideration of removing monitor
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A
<b>-Appendix A Requirements</b>	
# Precision Checks Performed Annually	25
# Precision Checks Passing (Percentage)	25 (100%)
# Accuracy Checks Performed Annually	4
# Accuracy Checks Passing (Percentage)	4 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes
Annual Data Certification Submitted?	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly
Frequency of Flow Rate Verification	N/A
Last Annual Performance Evaluation Date	10/11/07
Last Two Semi-Annual Flow Rate Audit Dates	N/A
<b>-Appendix C Requirements</b>	
Sampler Make & Model	API M300
Date Established	12/01/1980
Classification	SLAMS
Method (FRM, FEM, ARM)	FRM
<b>-Appendix D Requirements</b>	
Monitoring Objective	Highest Concentration
Monitoring Scale	Micro-scale
Sampling Season	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes
<b>-Appendix E Requirements</b>	
Distance between collocated samplers	N/A
Probe Inlet Height	2.6 meters
Airflow Arc	360°
Distance from Supporting Structure	2 meters from side of building
Distance from Obstructions	Roofline 2 meters to South, .5 meters above probe
Distance to Furnace Flue	N/A
Spacing from Trees	N/A
Nearest Major Roadway	Indian School Road
Distance and Direction to Road	3 meters, N
Traffic Count (ADT)	50,000
Groundcover	Paved

## WEST PHOENIX

County ID: WP

AQS ID: 04-013-0019

Address: 3847 W Earll, Phoenix

Coordinates: 33.48385N – 112.14257W

Metropolitan Sampling Area (MSA): 6200 Phoenix-Mesa

<b>-General Information</b>						
Pollutant/Monitor Type	Ozone	CO	NO <sub>2</sub>	PM <sub>2.5</sub>	PM <sub>2.5</sub>	PM <sub>10</sub>
Sampling Schedule	Continuous	Continuous	Continuous	1 in 3 days	Continuous	Continuous
Analysis Method	N/A	N/A	N/A	Filters Weighed In-House	N/A	N/A
Any Proposal to Remove or Move Monitor?	No	No	No	No	No	No
Is site suitable for comparison to PM <sub>2.5</sub> NAAQS per Part 58.30?	N/A	N/A	N/A	Yes	Yes	N/A
<b>-Appendix A Requirements</b>						
# Precision Checks Performed Annually	27	26	27	61	25	29
# Precision Checks Passing (Percentage)	27 (100%)	26 (100%)	27 (100%)	61 (100%)	25 (100%)	29 (100%)
# Accuracy Checks Performed Annually	4	3	3	2	2	2
# Accuracy Checks Passing (Percentage)	4 (100%)	3 (100%)	3 (100%)	2 (100%)	2 (100%)	2 (100%)
All Precision/Accuracy Reports Submitted to AQS?	Yes	Yes	Yes	Yes	Yes	Yes
Annual Data Certification Submitted?	Pending for July 2008	Pending for July 2008	Pending for July 2008	Pending for July 2008	Pending for July 2008	Pending for July 2008
Frequency of One-Point QC Check	Bi-Weekly	Bi-Weekly	Bi-Weekly	N/A	N/A	N/A
Frequency of Flow Rate Verification	N/A	N/A	N/A	Every 6 weeks	Bi-Weekly	Bi-Weekly
Last Annual Performance Evaluation Date	8/13/07	11/20/07	07/31/07	N/A	N/A	N/A
Last Two Semi-Annual Flow Rate Audit Dates	N/A	N/A	N/A	4/11/07, 10/25/07	1/25/07, 3/30/07	1/25/07, 3/30/07
<b>-Appendix C Requirements</b>						
Sampler Make & Model	API M400	API M300	API M200	R&P 2025	R&P FDMS-TEOM	R&P TEOM
Date Established	01/01/84	01/01/84	05/24/90	06/13/00	09/01/05	02/01/88
Classification	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS	SLAMS
Method (FRM, FEM, ARM)	FEM	FRM	FRM	FRM	None	FEM
<b>-Appendix D Requirements</b>						
Monitoring Objective	Population Exposure	Population Exposure	Population Exposure	Highest Concentration	Highest Concentration	Population Exposure
Monitoring Scale	Neighborhood	Neighborhood	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Sampling Season	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec	Jan-Dec
Network Meets Minimum Number of Monitors Required?	Yes	Yes	Yes	Yes	Yes	Yes
<b>-Appendix E Requirements</b>						
Distance between collocated samplers	N/A	N/A	N/A	2.3 meters	N/A	N/A
Probe Inlet Height	4.3 meters	4.3 meters	4.3 meters	2.8 meter	3.6 meter	2.7 meters
Airflow Arc	360°	360°	360°	360°	360°	360°
Distance from Supporting Structure	N/A	N/A	N/A	N/A	N/A	N/A
Distance from Obstructions	N/A	N/A	N/A	N/A	N/A	N/A
Distance to Furnace Flue	N/A	N/A	N/A	N/A	N/A	N/A
Spacing from Trees	N/A	N/A	N/A	N/A	N/A	N/A
Nearest Major Roadway	Thomas	Thomas	Thomas	Thomas	Thomas	Thomas
Distance and Direction to Road	360 meters, S	360 meters, S	360 meters, S	360 meters, S	360 meters, S	360 meters, S
Traffic Count (ADT)	29,000	29,000	29,000	29,000	29,000	29,000
Groundcover	Gravel	Gravel	Gravel	Gravel	Gravel	Gravel

# **APPENDIX III - PUBLIC NOTICE AND COMMENT INFORMATION**

## **Public Notice Period**

To fulfill the requirements of 40CFR58 §58.10, Maricopa County Air Quality posted a draft copy of this Network Review on its website on May 14, 2008. On that same day we posted a news item on the website and ran a notice in the Arizona Republic newspaper informing the public that the Review was available for inspection and comment. We also informed the public that a workshop would be held on June 16, 2008 where comments and concerns could be addressed.

## **Public Comments**

Maricopa County Air Quality did not receive any comments from the public regarding the annual Network Review.

## **News Release**

The following is a copy of the news release that was posted on the Maricopa County website and advertised in the Arizona Republic newspaper:

### **Public Notice**

The Maricopa County Air Quality Department will hold a public meeting to discuss its 2007 Air Monitoring Network Review on Monday, June 16, 2008 at 1:00 p.m. The meeting will be held at the Air Monitoring Division's offices at 2145 S. 11<sup>th</sup> Ave. suite 170, Phoenix, AZ 85007.

A copy of the draft network review is currently available on the department's website at the following website address:

<http://www.maricopa.gov/aq/divisions/monitoring/docs/pdf/REVIEW07.pdf>

[http://www.maricopa.gov/aq/divisions/monitoring/docs/pdf/REVIEW07\\_Appendices.pdf](http://www.maricopa.gov/aq/divisions/monitoring/docs/pdf/REVIEW07_Appendices.pdf)

Hard copies of the document may be requested from the department's Records Management Coordinator at (602) 506-6201 or at the department's address: 1001 North Central Avenue, Phoenix, Arizona 85004. Arrangements may be made to view the information every Monday through Friday (excluding major holidays) between 8:00 a.m. and 4:30 p.m. There is a small fee for copying available documents.

The 2007 Air Monitoring Network Review covers all ambient air monitoring activity captured by the department's 24 air monitoring sites in 2007. The Air Monitoring Network Review also provides a summary of the pollutants measured by Maricopa County, a look at the air monitoring network design and monitoring site details and statistics from the past year among other information.

Additional information on the draft Air Monitoring Network Review may be obtained by contacting Ben Davis at 2145 S 11<sup>th</sup> Avenue #170, Phoenix, AZ 85007 or (602) 258-5155 x221.

The purpose of this June 16, 2008 public meeting is to receive comments from the public on the draft document. Members of the public may comment in person or through written statements to the department. Written comments shall state the name and mailing address of the person making comment and be signed by that person or authorized agent or attorney. Written comments on the draft document are due to the department by June 23, 2008 at 5:00 p.m.

A sign language and/or Spanish interpreter will be made available upon request with 72 hours notice. Additional reasonable accommodations will be made available to the extent possible within the time frame of the request.